


PRODUCT DATA SHEET

Part Number: V5353

Type	Shape	Colour	Description
LED	Round	Yellow	T5 Round Through-hole LED

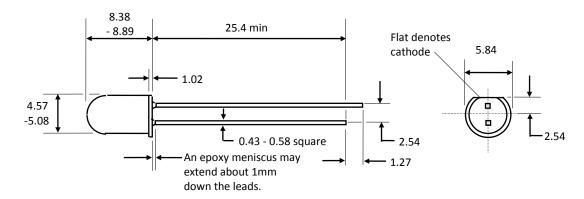

Dimensions in millimetres

Colour	Yellow
Manufacturer	Everlight
Characteristics	
Lens type	Diffuse
Luminous intensity(mcd @ 20mA) max	15
min	2.5
Viewing angle(2θ½) ⁰	65
Absolute maximum ratings(T _A =25°C)	Yellow
Power dissipation(mW) @ 25°C	120
Derate linearly from 25°C (mW/°C)	1.3
Continuous forward current @ 25°C (mA)	35
Peak forward current(1us, 0.3%duty cycle) (A)	1.0
Storage and operating temperatures	-55°C - +100°C
Lead soldering time @ 260°C (sec)	5
Reverse Voltage	5.0
Operating Characteristics(T _A =25°C)	
Forward Voltage (typ) (I _f =20mA)	2.1
Peak wavelength(I _F =20mA) (nm)	585
Spectral line half-width(I _F =20mA) (nm)	35
Capacitance(typ)(V _F =0V;f=1MHz) (pF)	45
Reverse current(max)(V _R =5V) (μA)	100
Packaging type	Loose in bags
Environmental	RoHS & REACH SVHC compliant

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for cml manufacturer:

Other Similar products are found below:

19050257 18602357 1860623W3A 19010351 19300133 192A0255 19211252 19050253 19241354 195A1350 SK-3-2500 6346002505R
6275AL 19041051 19010053 19180351 19272351 19040351 19051357 19050357 19010350 19000352 T000205 1860325W3D 19000353
SK-2-2500 19410132M 192A1355 7632 18600M51 19051257 19210363 19272350 1512145UR3 T000015 1927235WA 190403Z2
19211253 19740135 192D0000 19240354 192D0230 1511A35W3A 1860245W3 W643 19272352 19080350 190A2351 18606232
1512135UG3