

QRC series
S7-C

Socket for miniature relays C7-... and C80 series time relays



Type:

S7-C

2-pole, 1 level

Integrated clip and marking label

suitable for clips C80 series time relays

coil bridge bus bar to connect in A2

plug-in slot for overvoltage suppressing

10 A

Rated current

Specifications

10 A / 250 V

Test voltage V_{rms} / 1 min

2.5 kV

2.5 kV

4 mm², 2 x 1,5 mm²

2,5 mm² / AWG 16, 2 x 1 mm² / AWG 18

0,7 Nm

M3, Pozl, slot

detachable

for relays C7

1 ... 8, DIN/EN

DIN rail TS35 or mounting plate

-40 (no ice) ... 60 °C / -40 ... 80 °C

37g

Associated plug-in 8-pin QRC relays
Associated C80 time relays

C7-A2x, C7-1, C7-G, C7-X, C7-W, C7-H
C83, C85, 84

Accessories

Coil bridge bus bar

Retaining clip, plastic



Please note:

This socket replaces former socket S7-M


fully compatible

S7-B
CP-09B

Dimensions [mm]

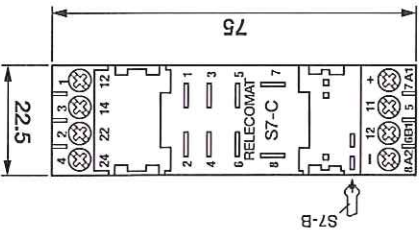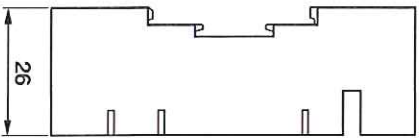

Technical approvals, conformities



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [releco manufacturer](#):

Other Similar products are found below :

[S-12](#) [S2B + S2BC](#) [C10A10X230A](#) [S4-B+S3-C](#) [C3-A30X24D](#) [C12A21BX24AD](#) [C2-A20X230A](#) [C7-A20X24D](#) [C4-A40X230A](#)
[C10A10X24D](#) [S9-M](#) [C4-A40X24D](#) [C9-A41X115A](#)