

Two-color chip LEDs with reflectors


SML-020 Series

The SML-020 series are two-color, high luminance chip LEDs with reflectors. Two-color chips are built into a single package. These LEDs are compact and leadless to allow a high mounting density.

●Features

- 1) Reflectors are used to achieve a high luminance.
- 2) Two-color emission, rectangular and leadless (3×2.5 mm).
- 3) Can be mounted by automatic mounting.
- 4) Available on tape

●External dimensions (Units : mm)

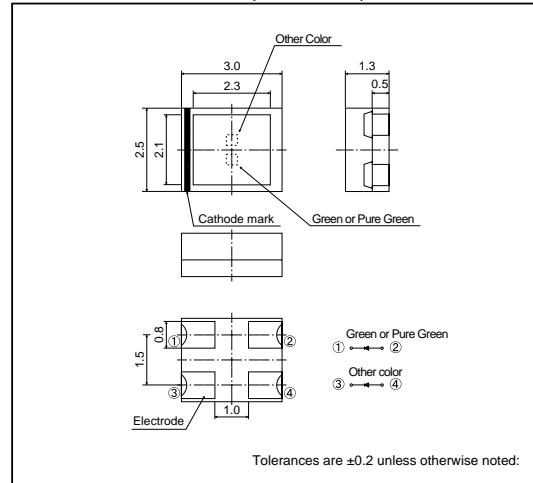

●Selection guide

Lens \ Emitting color	Red Green	Orange Green	Yellow Green	Orange Pure Green
Transparent clear	SML-020MVT SML-020MLT	SML-020MDT	SML-020MYT	SML-020PDT

●Absolute maximum ratings ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Limits					Unit
		MLT	MVT	MDT	MYT	PDT	
Power dissipation	P_D	60	←	←	←	←	mW/chip
Forward current	I _F Other Color	30	25	←	←	←	mA
	I _F Green	25					
Peak forward current	I _{FP} Other Color	75	60	←	←	←	mA*
	I _{FP} Green	60					
Reverse voltage	V_R	4	←	←	←	←	V
Operating temperature	T_{opr}	-30~+85	←	←	←	←	°C
Storage temperature	T_{stg}	-40~+85	←	←	←	←	°C

* Pulse width 1ms Duty 1 / 5

Light Emitting Diodes

●Electrical and optical characteristics ($T_a=25^\circ C$)

Type	Parameter	Color	Forward voltage		Reverse current		Luminous intensity		Peak wavelength		Spectral line half width	
			V_F (V)	Cond.	I_R (mA)	V_R (V)	I_v (mcd)	Cond.	I_p (nm)	Cond.	Dl (nm)	Cond.
Type	Parameter	Color	Typ.	Max.	I_F (mA)	Max.	Min.	Typ.	I_F (mA)	Typ.	I_F (mA)	Typ.
			2.0	2.8	20	100	4	3.6	6.3	20	650	40
SML-020MVT	V	Red	2.0	2.8				9.0	20		570	
	M	Green	2.2	2.8				9.0	16		660	25
SML-020MLT	L	Red	1.75	2.5	20	100	4	9.0	20	20	570	40
	M	Green	2.2	2.8				5.6	10		610	
SML-020MDT	D	Orange	2.0	2.8	20	100	4	9.0	20	20	570	40
	M	Green	2.2	2.8				3.6	6.3		585	
SML-020MYT	Y	Yellow	2.1	2.8	20	100	4	9.0	20	20	570	40
	M	Green	2.2	2.8				5.6	10		610	
SML-020PDT	D	Orange	2.0	2.8	20	100	4	2.2	4.0	20	555	40
	P	Pure Green	2.2	2.8								

●Directional pattern

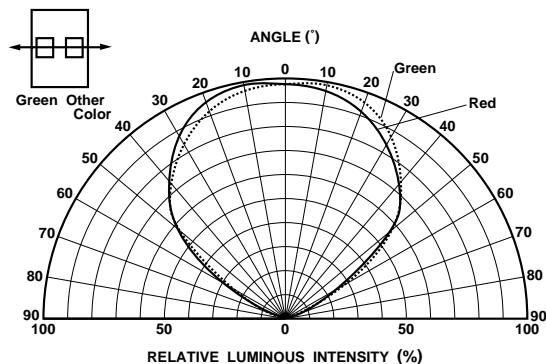


Fig. 1 Directional pattern (1)

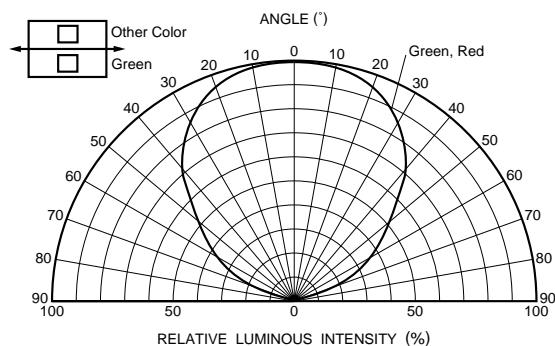


Fig. 2 Directional pattern (2)

●Electrical characteristics1 (SML-020MVT)

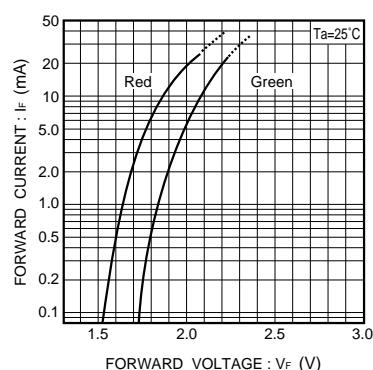


Fig. 3 Forward current vs. forward voltage

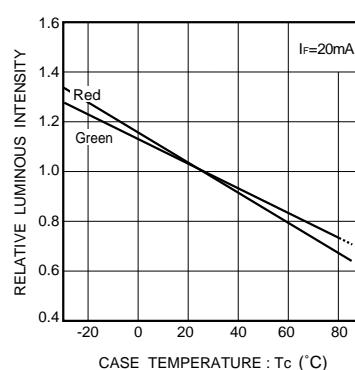


Fig. 4 Luminous intensity vs. case temperature

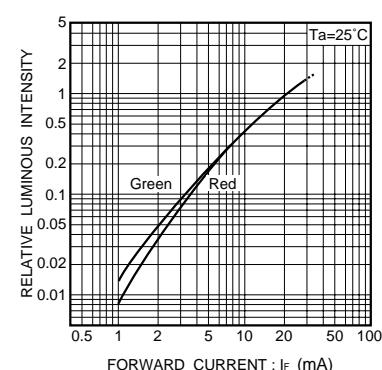


Fig. 5 Luminous intensity vs. forward current

Light Emitting Diodes

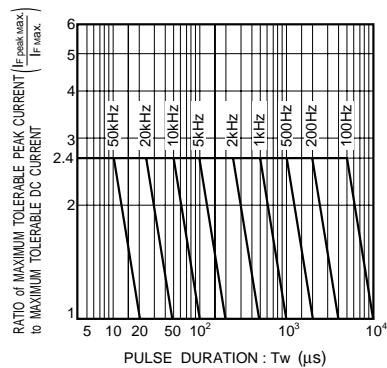


Fig. 6 Maximum tolerable peak current vs. pulse duration

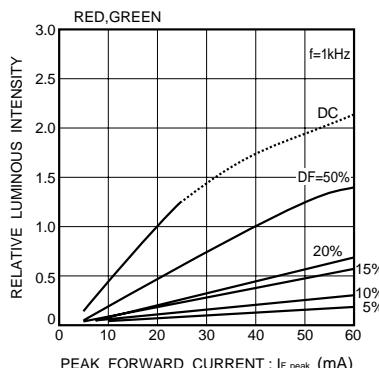


Fig. 7 Luminous intensity vs. peak forward current

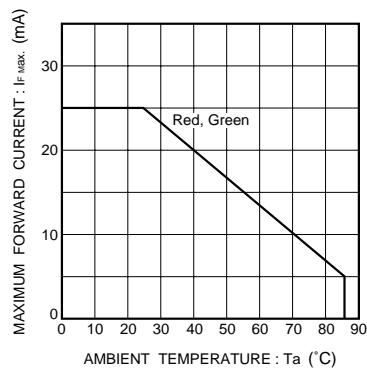


Fig. 8 Maximum forward current vs. ambient temperature

●Electrical characteristics2 (SML-020MLT)

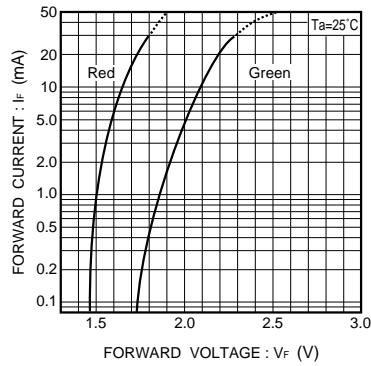


Fig. 9 Forward current vs. forward voltage

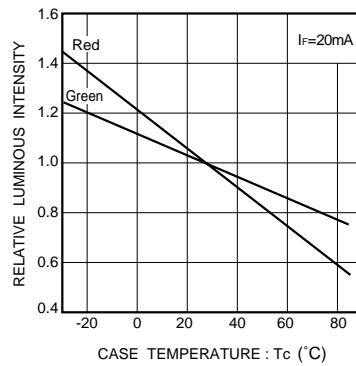


Fig. 10 Luminous intensity vs. case temperature

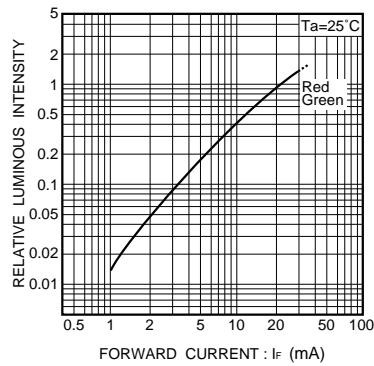


Fig. 11 Luminous intensity vs. forward current

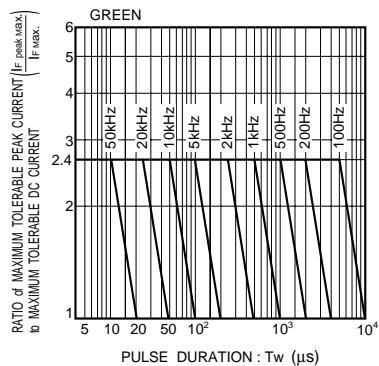


Fig. 12 Maximum tolerable peak current vs. pulse duration

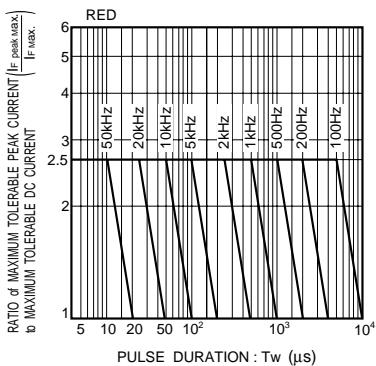


Fig. 13 Maximum tolerable peak current vs. pulse duration

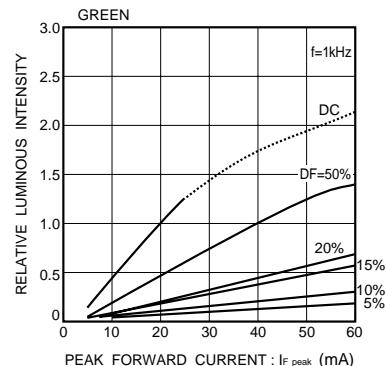


Fig. 14 Luminous intensity vs. peak forward current

Light Emitting Diodes

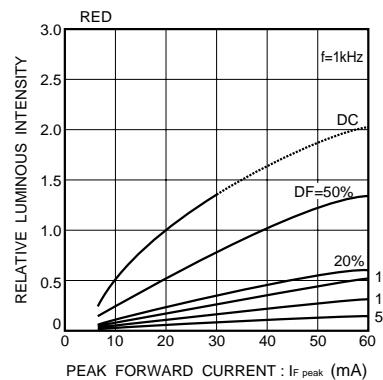


Fig. 15 Luminous intensity vs. peak forward current

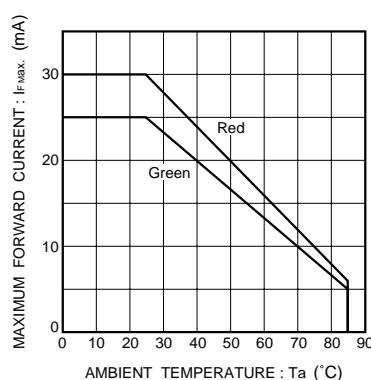


Fig. 16 Maximum forward current vs. ambient temperature

●Electrical characteristics3 (SML-020MDT)

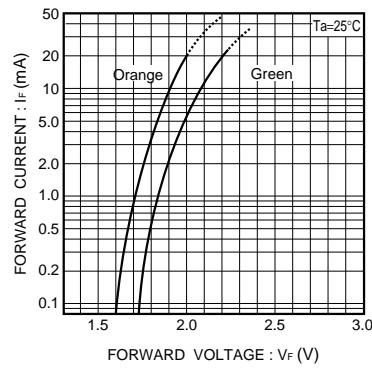


Fig. 17 Forward current vs. forward voltage

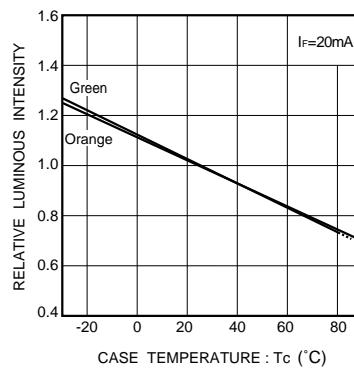


Fig. 18 Luminous intensity vs. case temperature

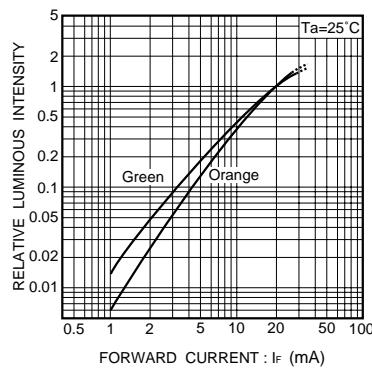


Fig. 19 Luminous intensity vs. forward current

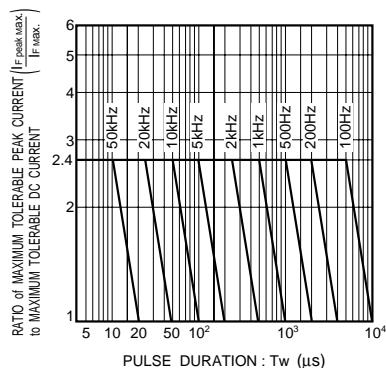


Fig. 20 Maximum tolerable peak current vs. pulse duration

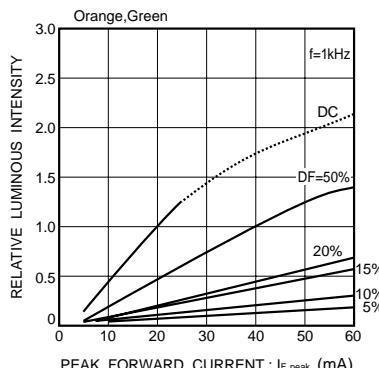


Fig. 21 Luminous intensity vs. peak forward current

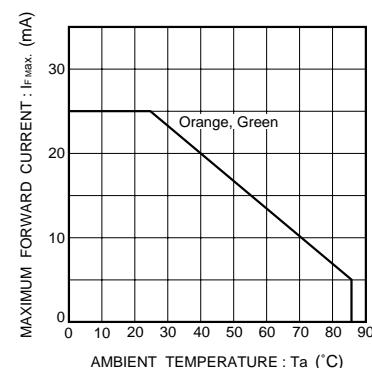


Fig. 22 Maximum forward current vs. ambient temperature

Light Emitting Diodes

● Electrical characteristics4 (SML-020MYT)

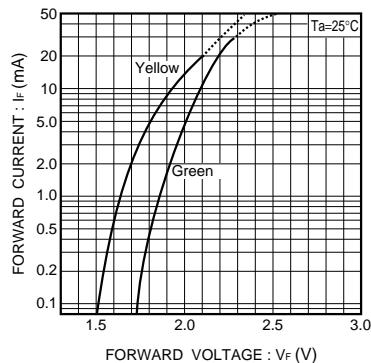


Fig. 23 Forward current vs. forward voltage

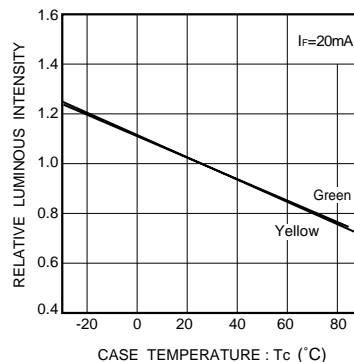


Fig. 24 Luminous intensity vs. case temperature

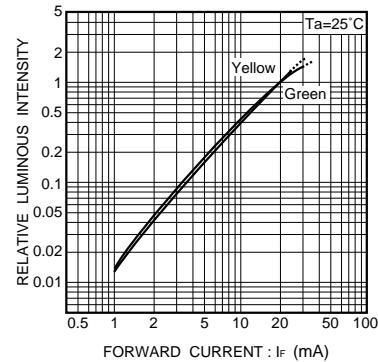


Fig. 25 Luminous intensity vs. forward current

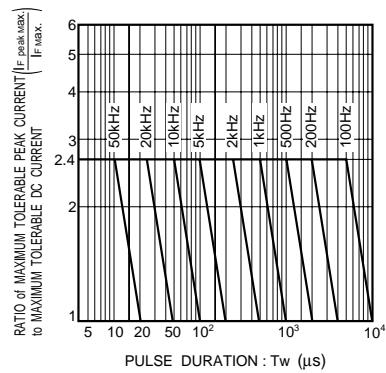


Fig. 26 Maximum tolerable peak current vs. pulse duration

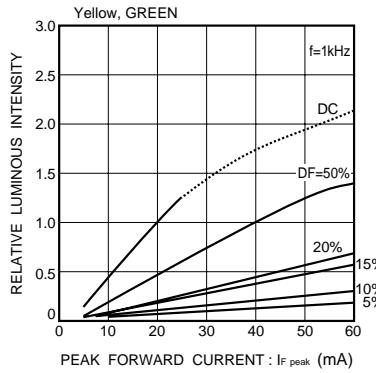


Fig. 27 Luminous intensity vs. peak forward current

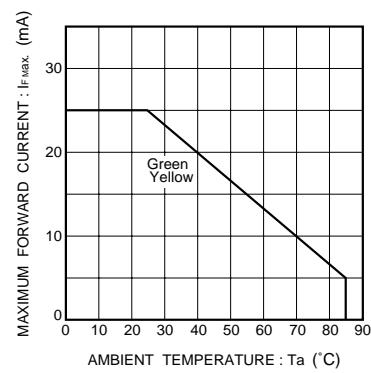


Fig. 28 Maximum forward current vs. ambient temperature

● Electrical characteristics5 (SML-020PDT)

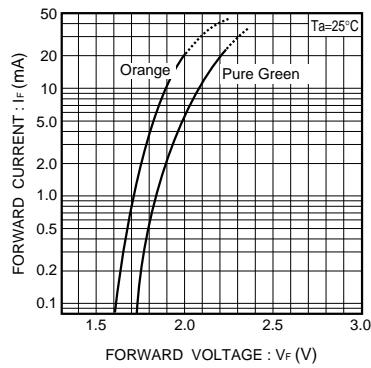


Fig. 29 Forward current vs. forward voltage

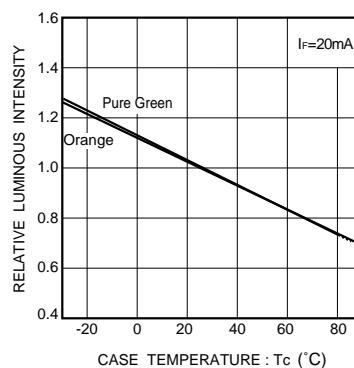


Fig. 30 Luminous intensity vs. case temperature

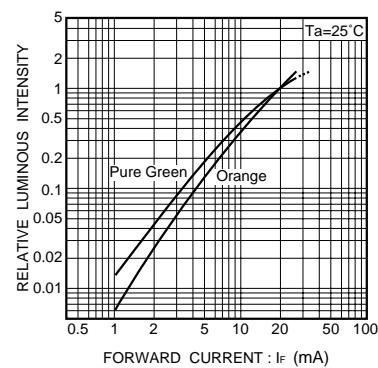


Fig. 31 Luminous intensity vs. forward current

Light Emitting Diodes

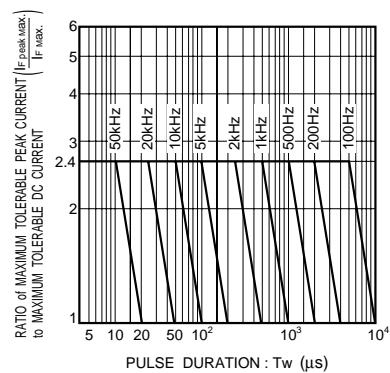


Fig. 32 Maximum tolerable peak current vs. pulse duration

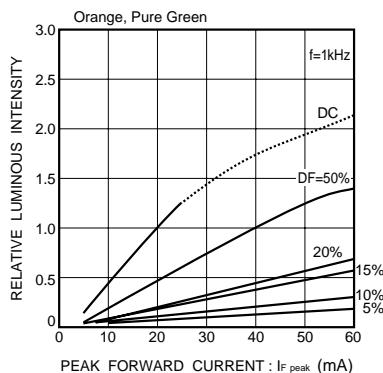


Fig. 33 Luminous intensity vs. peak forward current

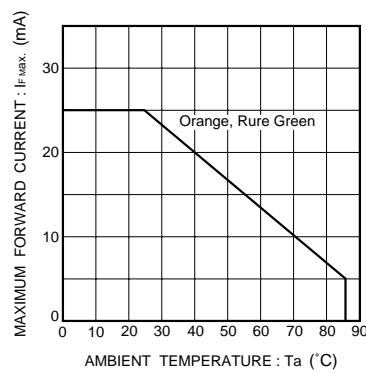


Fig. 34 Maximum forward current vs. ambient temperature

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for rohm manufacturer:

Other Similar products are found below :

[R6015ENZC8](#) [BP5034D24](#) [BP5013](#) [BP5011](#) [BP5718A12](#) [R6035ENZC8](#) [RN142ZST2R](#) [RB520S-40TE61](#) [RB886YT2R](#) [RB851YT2R](#)
[MCR100JZHF30R1](#) [MCR100JZHJ150](#) [MCR50JZHFLR820](#) [MCR50JZHJ330](#) [ML610Q793-SDK](#) [MNR34J5ABJ223](#) [BD750L2FP-EVK-301](#)
[BD9009HFP-EVK-001](#) [BD9285F-GE2](#) [KTR10EZPF2203](#) [SML-810TBT86](#) [RB168L-60TE25](#) [MCR100JZHF1301](#) [MCR100JZHJ4R3](#)
[MCR100JZHJ513](#) [MCR100JZHJ683](#) [MCR10EZHFSR062](#) [BD9B300MUV-EVK-001](#) [MNR12ERAPJ100](#) [RF1501TF3S](#) [MNR34J5ABJ221](#)
[BD9060HFP-EVK-001](#) [BD9611MUV-EVK-001](#) [BD9778HFP-TR](#) [BD9C601EFJ-EVK-001](#) [BD9D321EFJ-EVK-101](#) [BA7603F-E2](#)
[BD95820N-LB](#) [BD9A100MUV-EVK-001](#) [BD9C401EFJ-EVK-001](#) [BD9C501EFJ-EVK-001](#) [BU90005GWZ-E2-EVK-101](#) [846-1001-KIT](#)
[LA-401XD](#) [SLA560WBD2PT2](#) [BH1790GLC-EVK-001](#) [BD9B301MUV-EVK-101](#) [BA7071F-E2](#) [SK-AD01-D62Q1367TB](#) [BM2P129TF-EVK-001](#)