


V <sub>RSM</sub> V <sub>DRM</sub>	V <sub>RRM</sub> V <sub>DRM</sub>	(dv/ dt) <sub>cr</sub> V/μs	I <sub>TRMS</sub> (maximum value for continuous operation)			
			75 A			
			I <sub>TAV</sub> (sin. 180; T <sub>case</sub> = 68 °C)			
			48 A			
500	400	500	—	—	SKKH 41/04 D	—
700	600	500	SKKT 41/06 D	SKKT 42/06 D	SKKH 41/06 D	SKKH 42/06 D
900	800	500	SKKT 41/08 D	SKKT 42/08 D <sup>1)</sup>	SKKH 41/08 D	SKKH 42/08 D
1300	1200	1000	SKKT 41/12 E	SKKT 42/12 E <sup>1)</sup>	SKKH 41/12 E	SKKH 42/12 E
1500	1400	1000	SKKT 41/14 E	SKKT 42/14 E <sup>1)</sup>	SKKH 41/14 E	SKKH 42/14 E
1700	1600	1000	SKKT 41/16 E	SKKT 42/16 E <sup>1)</sup>	SKKH 41/16 E	SKKH 42/16 E
1900	1800	1000	SKKT 41/18 E	SKKT 42/18 E <sup>1)</sup>	SKKH 41/18 E	SKKH 42/18 E
2100	2000	1000	SKKT 41/20 E	SKKT 42/20 E <sup>1)</sup>	—	—
2300	2200	1000	SKKT 41/22 E	SKKT 42/22 E <sup>1)</sup>	—	—

## SEMIPACK® 1 Thyristor / Diode Modules

SKKT 41      SKKH 41  
 SKKT 42      SKKH 42  
 SKKT 42B      SKKL 42<sup>2)</sup>



Symbol	Conditions	SKKT 41 SKKH 41	SKKT 42 SKKT 42B	SKKH 42	Units
I <sub>TAV</sub>	sin. 180; T <sub>case</sub> = 74 °C T <sub>case</sub> = 85 °C	48		A	
I <sub>D</sub>	B2/B6   T <sub>amb</sub> = 45 °C; P 3/180 T <sub>amb</sub> = 35 °C; P 3/180 F	40 50 / 60 85 / 110 110 / 3 x 85		A	
I <sub>RMS</sub>	W1/W3   T <sub>amb</sub> = 35 °C; P 3/180 F			A	
I <sub>TSM</sub>	T <sub>vj</sub> = 25 °C; 10 ms T <sub>vj</sub> = 125 °C; 10 ms	1 000		A	
i <sup>2</sup> t	T <sub>vj</sub> = 25 °C; 8,3 ... 10 ms T <sub>vj</sub> = 125 °C; 8,3 ... 10 ms	850 5 000 3 600		A <sup>2</sup> s A <sup>2</sup> s	
t <sub>gd</sub>	T <sub>vj</sub> = 25 °C; I <sub>G</sub> = 1 A dI <sub>G</sub> /dt = 1 A/μs	1		μs	
t <sub>gr</sub>	V <sub>D</sub> = 0,67 · V <sub>DRM</sub>	2		μs	
(di/dt) <sub>cr</sub>	T <sub>vj</sub> = 125 °C	150		A/μs	
t <sub>q</sub>	T <sub>vj</sub> = 125 °C	typ. 80		μs	
I <sub>H</sub>	T <sub>vj</sub> = 25 °C; typ./max.	150 / 250		mA	
I <sub>L</sub>	T <sub>vj</sub> = 25 °C; R <sub>G</sub> = 33 Ω; typ./max.	300 / 600		mA	
V <sub>T</sub>	T <sub>vj</sub> = 25 °C; I <sub>T</sub> = 200 A	max. 1,95		V	
V <sub>T(TO)</sub>	T <sub>vj</sub> = 125 °C	1		V	
r <sub>T</sub>	T <sub>vj</sub> = 125 °C	4,5		mΩ	
I <sub>DD</sub> ; I <sub>RD</sub>	T <sub>vj</sub> = 125 °C; V <sub>RD</sub> = V <sub>RRM</sub> V <sub>DD</sub> = V <sub>DRM</sub>	max. 15 <sup>3)</sup>		mA	
V <sub>GT</sub>	T <sub>vj</sub> = 25 °C; d.c.	3		V	
I <sub>GT</sub>	T <sub>vj</sub> = 25 °C; d.c.	150		mA	
V <sub>GD</sub>	T <sub>vj</sub> = 125 °C; d.c.	0,25		V	
I <sub>GD</sub>	T <sub>vj</sub> = 125 °C; d.c.	6		mA	
R <sub>thjc</sub>	cont. sin. 180 rec. 120	0,65 / 0,33 0,69 / 0,35 0,73 / 0,37 0,2 / 0,1 — 40 ... + 125 — 40 ... + 125		°C/W °C/W °C/W °C/W °C/W °C °C	
R <sub>thch</sub>	per thyristor / per module				
T <sub>vj</sub>					
T <sub>stg</sub>					
V <sub>isol</sub>	a. c. 50 Hz; r.m.s.; 1 s/1 min	3600 / 3000		V~	
M <sub>1</sub>	to heatsink	5 (44 lb. in.) ± 15 % <sup>4)</sup>		Nm	
M <sub>2</sub>	to terminals	3 (26 lb. in.) ± 15 %		Nm	
a		5 · 9,81		m/s <sup>2</sup>	
w	approx.	95		g	
Case	→ page B 1 – 95	SKKT 41: A 5 SKKH 41: A 6 SKKH 42: A 47	SKKL 42: A 59 SKKT 42: A 46 SKKT 42B: A 48		

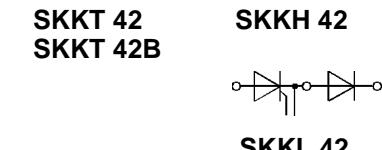

### Features

- Heat transfer through aluminium oxide ceramic isolated metal baseplate
- Hard soldered joints for high reliability
- UL recognized, file no. E 63 532

### Typical Applications

- DC motor control (e.g. for machine tools)
- AC motor soft starters
- Temperature control (e.g. for ovens, chemical processes)
- Professional light dimming (studios, theaters)

<sup>1)</sup> Also available in SKKT 42 B configuration (case A 48)

<sup>2)</sup> SKKL 42 available on request

<sup>3)</sup> /20 E, /22 E max. 30 mA

<sup>4)</sup> See the assembly instructions

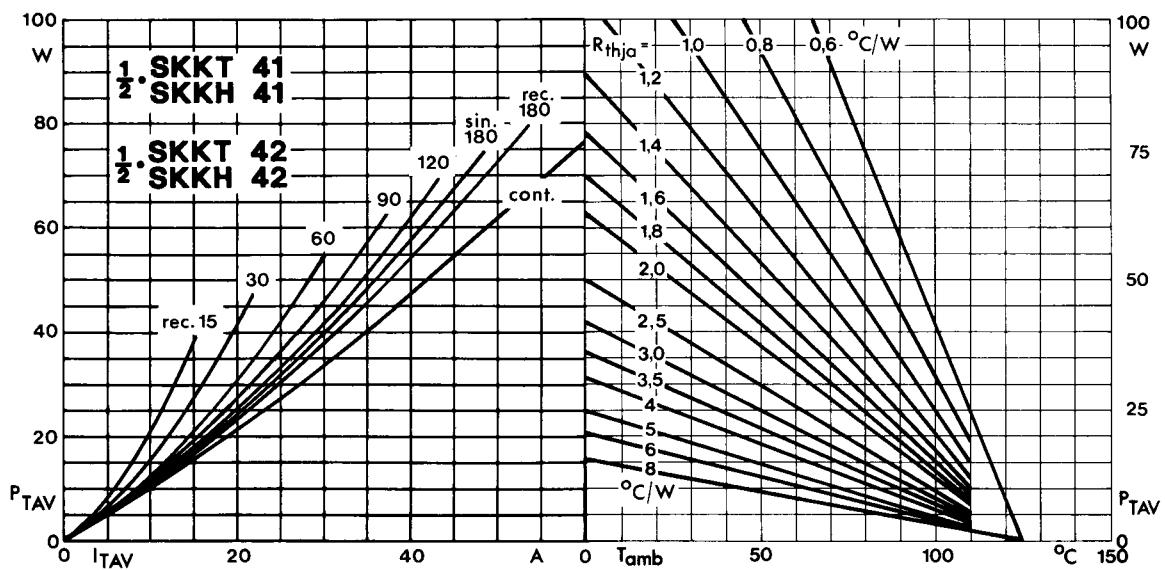


Fig. 1 Power dissipation per thyristor vs. on-state current and ambient temperature

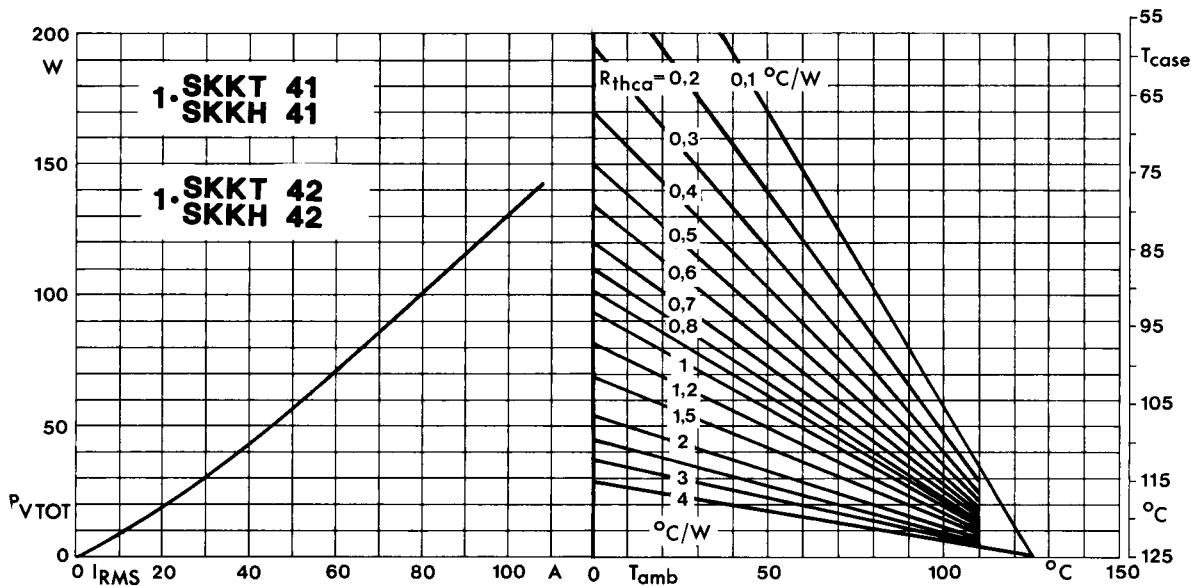


Fig. 2 Power dissipation per module vs. rms current and case temperature

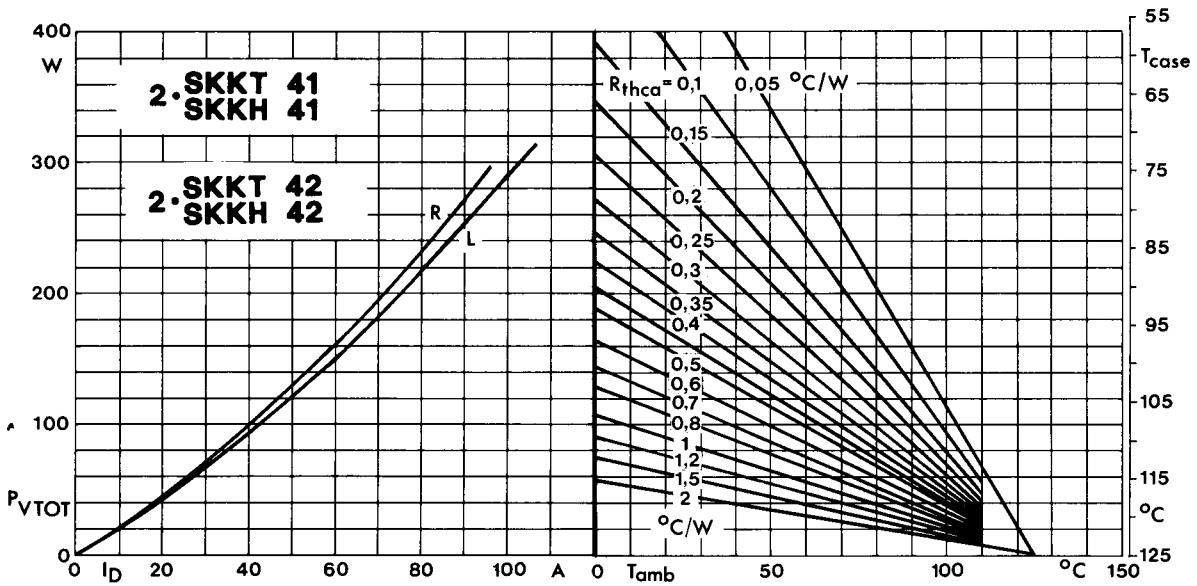


Fig. 3 Power dissipation of two modules vs. direct current and case temperature

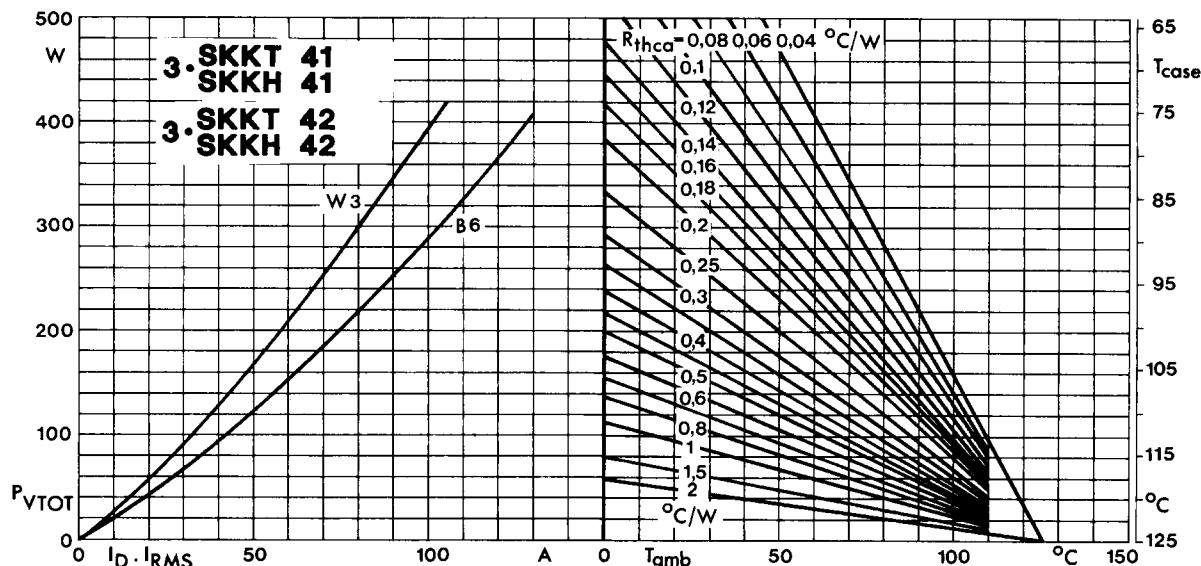


Fig. 4 Power dissipation of three modules vs. direct and rms current and case temperature

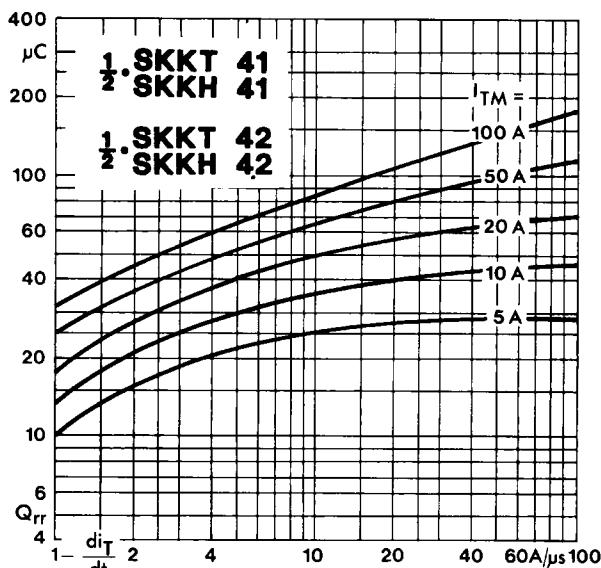


Fig. 5 Recovered charge vs. current decrease

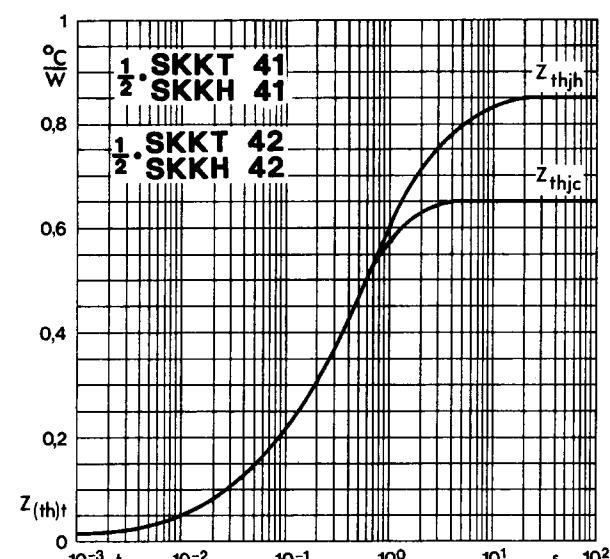


Fig. 6 Transient thermal impedance vs. time

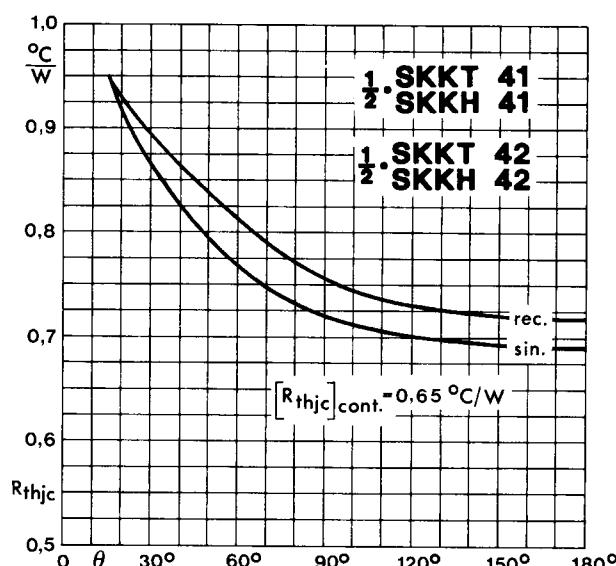


Fig. 7 Thermal resistance vs. conduction angle

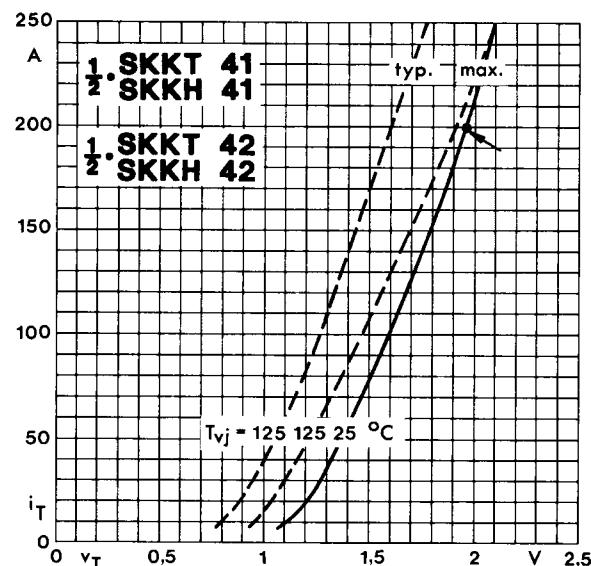


Fig. 8 On-state characteristics

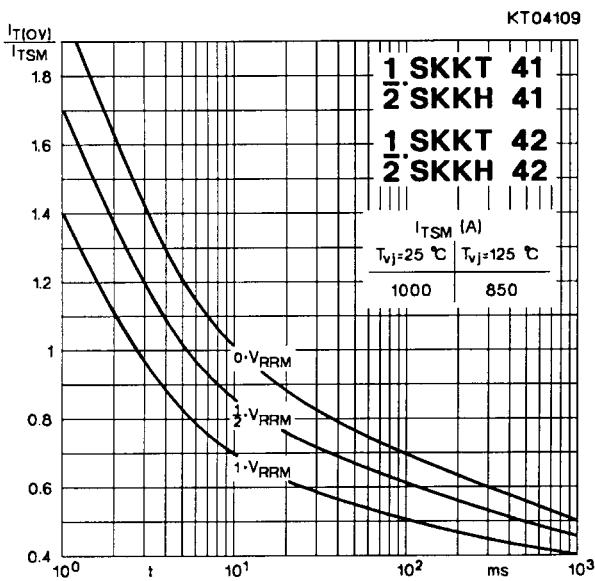


Fig. 9 Surge overload current vs. time

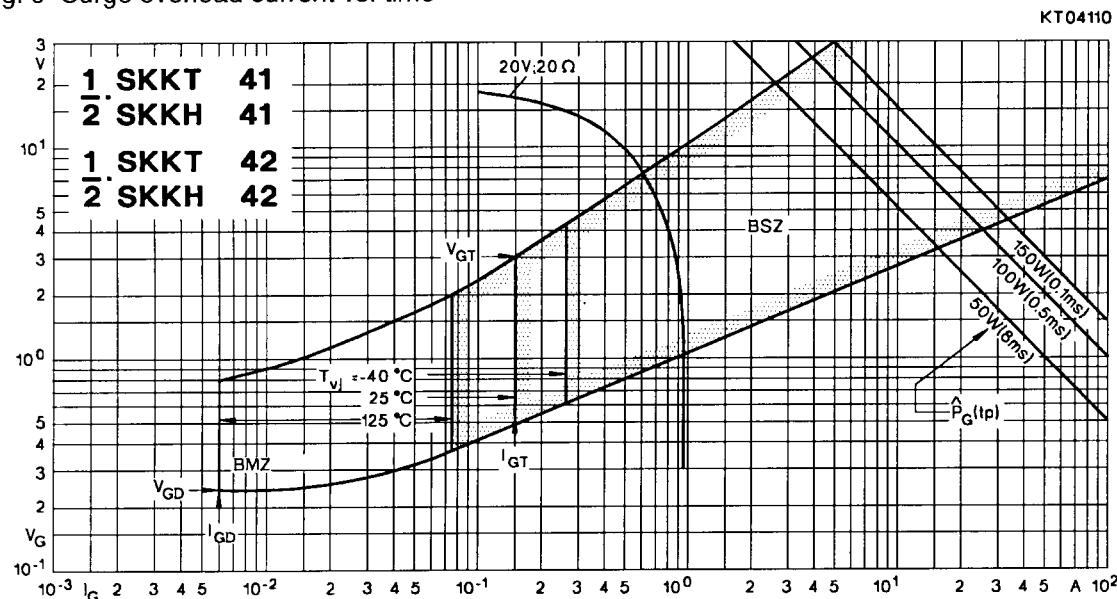
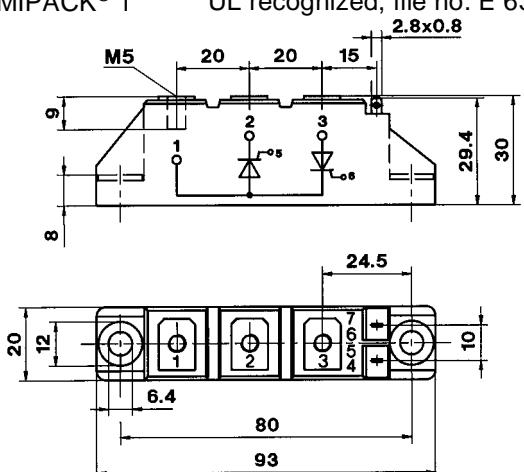
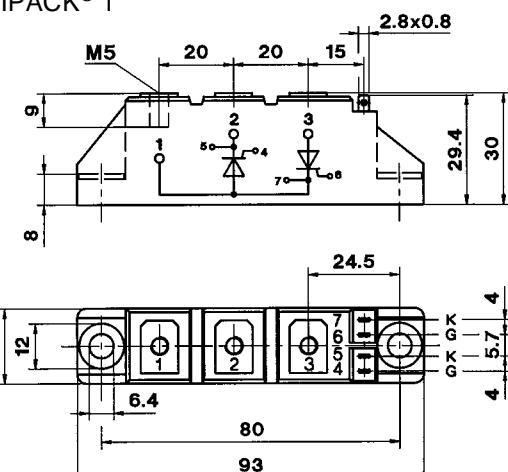
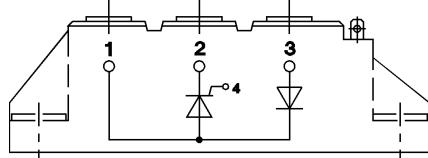
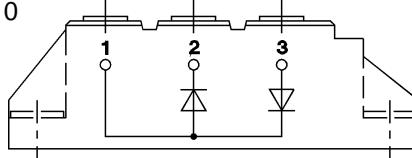
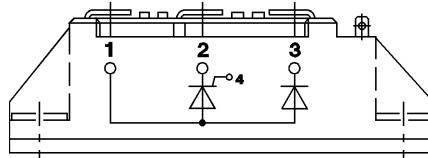
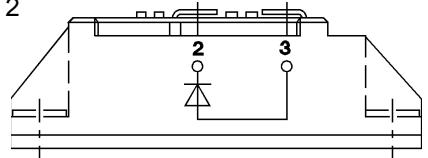
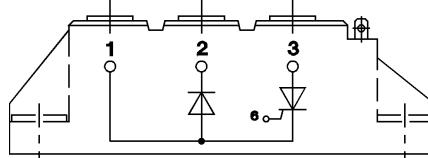
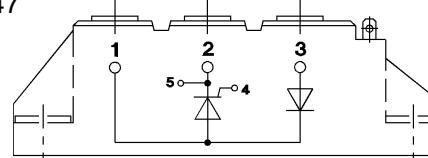
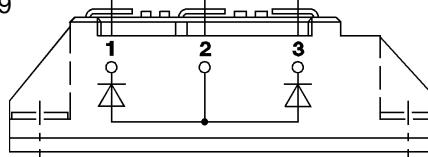
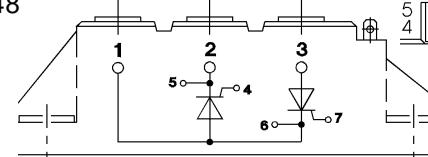
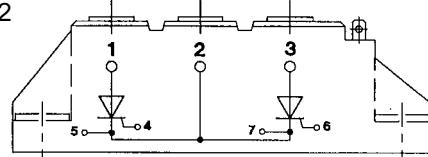
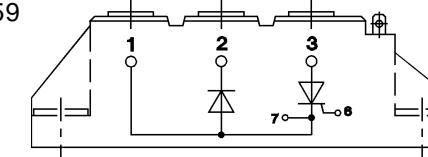


Fig. 10 Gate trigger characteristics

<p><b>SKKT 19 ... 105</b> Case A 5      IEC 192-2: A 77 A                   JEDEC: TO-240 AA SEMIPACK® 1    UL recognized, file no. E 63 532</p>  <p>Dimensions in mm</p>	<p><b>SKKT 20/ ... 106/</b> Case A 46      IEC 192-2: A 77 A                   JEDEC: TO-240 AA SEMIPACK® 1</p>  <p>Dimensions in mm</p>
<p><b>SKKH 26 ... 105</b> Case A 6</p> 	<p><b>SKKD 26 ... 100</b> Case A 10</p> 
<p><b>SKNH 56 ... 91</b> Case A 7</p> 	<p><b>SKKE 81</b> Case A 12</p> 
<p><b>SKKL 56 ... 105</b> Case A 9</p> 	<p><b>SKKH 27 ... 106</b> Case A 47</p> 
<p><b>SKND 46 ... 81</b> Case A 19</p> 	<p><b>SKKT 20 B ... 106 B</b> Case A 48</p> 
<p><b>SKMT 92</b> Case A 72</p> 	<p><b>SKKL 42 ... 106</b> Case A 59</p> 

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [semikron manufacturer:](#)***

Other Similar products are found below :

[SKD 60/12](#) [SKKT 42B12 E](#) [SKM200GB12T4](#) [SKR 130/14](#) [SKCH 40/16](#) [SKD 30/04A1](#) [SKKD 26/14](#) [SKKT 92/18E](#) [SKYPER 32 R](#) [SKKH 27/16E](#) [SKKD 380/16](#) [SKD 110/08](#) [SKD 62/12](#) [SKIIP 36NAB126V1 M20](#) [SKKD 162/20H4](#) [SKKD 380/08](#) [SKKH 72/20E H4](#) [SKKT 250/12E](#) [SKN71/02](#) [SKN 100/12](#) [SKN 100/14](#) [SKR 100/08](#) [SKIIP 24AC12T4V1 M20](#) [SKIIP 28AHB16V1 M20](#) [SKIIP 35NAB126V10 M20](#) [SKKH 570/16E](#) [SKKE 380/16](#) [SKR 130/18](#) [SK 45 UT 16](#) [SKKT 570/18E](#) [SKN 130/14](#) [SKPC200-240](#) [SKPC100Z-440](#) [SK 100 WT 12](#) [SK 25 UT 12](#) [SKR70/04](#) [SKD35/16](#) [SKKT 42/08E](#) [SKCH 40/08](#) [SKD 62/18](#) [SKD 82/08](#) [SKIIP 23NAB126V1 M20](#) [SKKQ 1200/14E](#) [SKR 60F12](#) [SKR 100/04](#) [SKR 100/14](#) [SKIIP 37AC12T4V1 M20](#) [SKD 60/16](#) [SKD 62/08](#) [SKDT 60/12](#)