

# AC/DC Current Probe Model SL261



The Model SL261 is designed for AC/DC current measurement capabilities using Hall effect technology. It measures from 100 mA to over 100A.

The “screw driver” shape, with its narrow elongated prod, was chosen to permit probing in crowded cable bundles, or measuring in tight areas such as on circuit boards, motor controllers and automotive circuitry. The electronics and batteries are self-contained in the handles. It is

an excellent companion to DMMs, recorders and loggers, oscilloscopes and waveform displaying instruments. Low phase shift also insures reliable power and power quality measurements.

The Model SL261 is designed for current measuring and displaying on oscilloscopes. AC + DC output signals proportional to the total current are provided for True RMS measurements.

## Features

- Low AC and DC measurements
- 100mA to 100AAc/Dc peak
- Unique design for probing in crowded wiring in industrial and automotive environments
- Hall effect sensor technology
- Use with DMMs, voltmeters and other voltage measuring instruments

## Applications


- Circuit board testing
- Motor controllers
- Automotive circuitry

## Specifications

MODEL	SL261
<b>ELECTRICAL</b>	
Nominal Range	10A & 100A peak
Measurement Range	100mA to 100A peak
Transformation Ratio	Voltage output
Output Signal	10A: 100mV/A 100A: 10mV/A
Accuracy (100mV/A Range) 50mA to 10A Peak 500mA to 40A Peak 40A to 100A Peak	3% of Reading $\pm$ 50mA
	$\pm$ 4% of Reading $\pm$ 50mA
	$\pm$ 15% max @ 100A
Phase Shift (10mV/A Range)	DC to 65Hz 1.5°
Overload	Red LED indicates input greater than the selected range
Frequency Range	DC to 100kHz (-3dB with current derating)
Load Impedance	>1M $\Omega$ /100pF
Working/Common Mode Voltage	600Vrms
Output Termination	6.5 ft coaxial cable
<b>MECHANICAL</b>	
Operating Temperature	32° to 122°F (0° to 50°C)
Storage Temperature	-22° to 176°F (-30° to 80°C)
Operating Relative Humidity	10° to 30°C: 85 $\pm$ 5% RH (without condensation)
	40° to 50°C: 45 $\pm$ 5% RH (without condensation)
Maximum Conductor Size	0.46" (11.8mm)
Dimensions	9.09 x 1.42 x 2.64" (231 x 36 x 67mm)
Weight	11.6 oz (330g) with battery
Polycarbonate Material	Handle: Lexan® 920A, UL94 V2
<b>SAFETY</b>	
Electrical	EN 61010-2-32
CE Mark	Yes

Note: Reference conditions:

Model SL261: 23°C  $\pm$  5°K, 20 to 75% RH, DC to 1kHz, probe zeroed, 1 minute warm-up, battery at 9V  $\pm$  0.1V, external magnetic field <40A/m, no DC component, no external current carrying conductor, 1M $\Omega$ /100pF load, conductor centered.

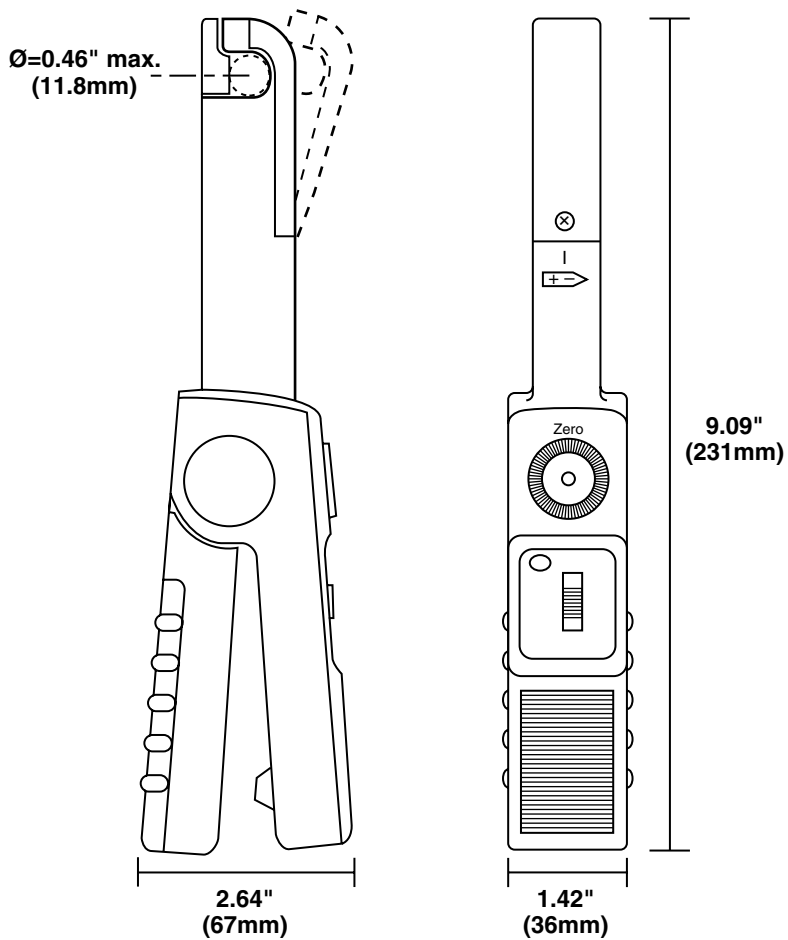

**Lead with BNC:**  
 Insulated 6.5 ft  
 (2m) coaxial cable  
 with insulated BNC  
 connector rated  
 600Vrms

**ORDERING INFORMATION**

**CATALOG NO.**

**AC/DC Current Probe Model SL261** (BNC — 100mV/A — 10A Peak & 10mV/A — 100A Peak) . . . . . **Cat. #1201.51**

Includes a 9V battery and user manual

**Accessories (Optional)**

Banana/BNC connector XF-SS (4mm plug adaptor) . . . . . **Cat. #2111.32**

## Contact Us

### United States & Canada:

Chauvin Arnoux®, Inc.  
d.b.a. AEMC® Instruments  
200 Foxborough Blvd.  
Foxborough, MA 02035 USA  
(508) 698-2115 • Fax (508) 698-2118  
www.aemc.com

**Customer Support — for placing an order, obtaining price & delivery:**  
customerservice@aemc.com

**Sales Department — for general sales information:**  
sales@aemc.com

**Repair and Calibration Service — for information on repair & calibration, obtaining a user manual:**  
repair@aemc.com

**Technical and Product Application Support — for technical and application support:**  
techinfo@aemc.com

**Webmaster — for information regarding www.aemc.com:**  
webmaster@aemc.com

### South America, Central America, Mexico, Caribbean, Australia & New Zealand:

Chauvin Arnoux®, Inc.  
d.b.a. AEMC® Instruments  
15 Faraday Drive  
Dover, NH 03820 USA  
(978) 526-7667 • Fax (978) 526-7605  
export@aemc.com  
www.aemc.com

### All other countries:

Chauvin Arnoux SCA  
190, rue Championnet  
75876 Paris Cedex 18, France  
33 1 44 85 45 28 • Fax 33 1 46 27 73 89  
info@chauvin-arnoux.com  
www.chauvin-arnoux.com

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [aemc manufacturer](#):*

Other Similar products are found below :

[2118.79](#) [2118.82](#) [6417](#) [SL261](#) [MN261](#) [MN106](#) [2119.02](#) [MD301](#) [SR601](#) [1017.84](#) [6610](#) [SR752](#) [MS3474W10-6P](#) [MS3456L16-10SY-LC](#)  
[MN103](#) [BR07](#) [2118.73](#) [MS3475W14-4S-LC](#) [MS3456L20-14SX-LC](#) [MS3450W22-2SY-LC](#) [MS3475W14-4SW](#) [D38999/26WD5PN](#)