

Keyword:
 Lithium Xtra

Model: SL-750

Performance Data Size ½AA
 (Typical values for batteries stored at 25 °C for one year)


| | |
|-----------------------------------|----------------------|
| System | Li/SOCl ₂ |
| Nominal voltage | 3.6 V |
| Nominal capacity | 1.1 Ah |
| Nominal current | 0.6 mA |
| Max. continuous discharge current | 20 mA |
| Pulse current capability | 60 mA |
| Anode surface area | 6 cm ² |
| Lithium content | 0.35 g |
| Weight | 9 g |
| Volume | 4.3 cm ³ |
| Temperature range | -55...+85 °C |

WARNING:
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.


UL recognition under file MH 12827

See also our website under Products/Safety


Typical Discharge Curves at +25°C

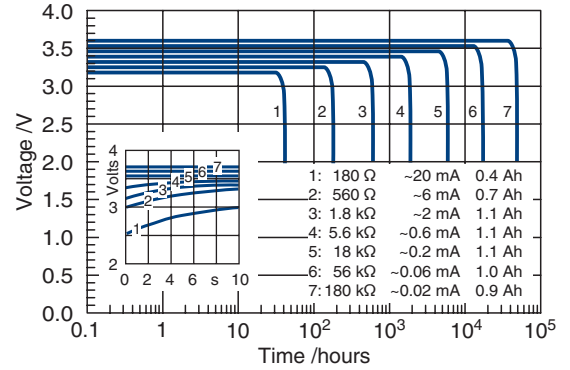


Available Capacity

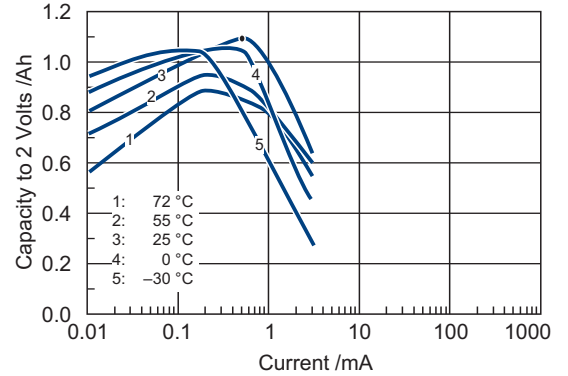


Operating Voltage

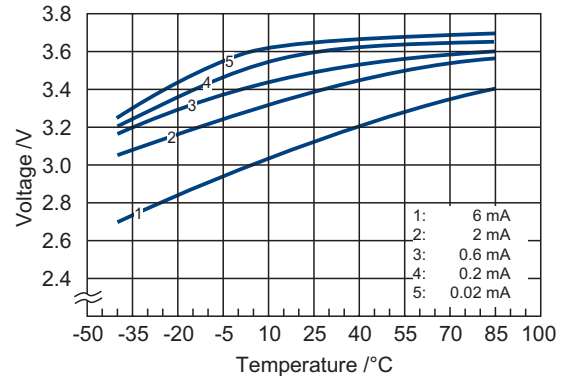


Pulse Discharge Characteristics at +25°C

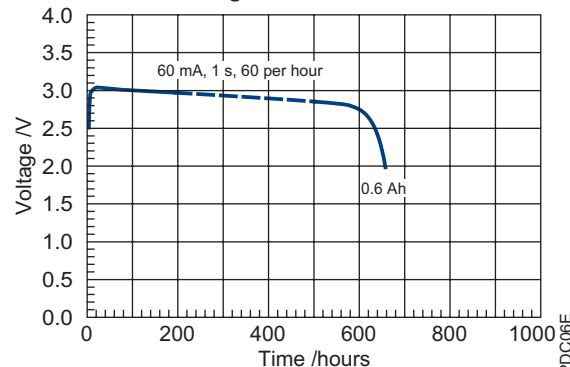


SL-750/S

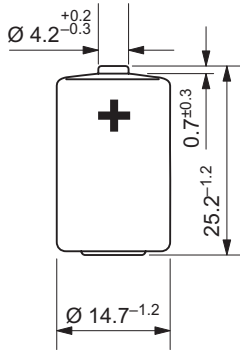


SL-750/T




SL-750/P

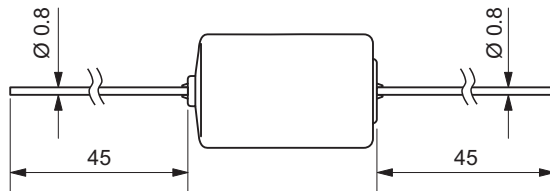

SL-750/PR



SL-750/PT



Available Terminations

| | |
|-----------|----------------|
| SL-750/S | Standard |
| SL-750/T | Tags |
| SL-750/P | Pins |
| SL-750/PR | Pins Radial |
| SL-750/PT | Polarized Tags |

Catalogue No.

| |
|---------------|
| 11 1 07501 00 |
| 11 1 07502 00 |
| 11 1 07503 00 |
| 11 1 07506 00 |
| 11 1 07508 00 |

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [tadiran](#) manufacturer:

Other Similar products are found below :

[TL-5242](#) [TL-5104/SBP](#) [TL5902/T](#) [TL-5903/P](#) [TL-5930/F](#)