



## SurLok Plus™

The SurLok Plus™ compression lug is a field installable, highly reliable alternative to common compression lugs. Using industry standard crimp, screw, and busbar termination options, thus eliminating the need to purchase special torque tools.

Amphenol's SurLok Plus™ is an environmentally sealed version of our original SurLok™ but available in smaller sizes, and features a quick lock and press-to-release design. Incorporating the latest R4 RADSOK® Technology, SurLok Plus™ is a compact, quick mating, and robust product line.

The RADSOK® high amperage contact technology utilizes high tensile strength properties of a stamped and formed, high conductivity alloy grid to produce low insertion forces while maintaining a large conductive surface area.

The R4 version of the RADSOK® represents the culmination of three years of research and development in laser welding copper based alloys.

### Features:


- R4 RADSOK® Technology
- IP67 rated
- Touch Proof
- Quick lock and press-to-release design
- "Keyway" design to prevent incorrect mating
- 360° rotating plug
- Various termination options (Threaded, Crimp, Busbar)
- Compact robust design




Technical Data			
<b>Contact Size</b>	5.7mm (120A) 8.0mm (200A) 10.3mm (300A)	<b>IP Rating</b>	IP 67
<b>Current Rating</b>	120A~300A	<b>Protection</b>	Touch Proof
<b>Operating Voltage</b>	1000V AC/DC	<b>Flammability</b>	UL 94-V0
<b>Operating Temp</b>	-40°C to 125°C	<b>Locking</b>	Spring Locking

The markets and applications for the SurLok Plus™ series include but are not limited to the following:


- EV/HEV
- BMS/Energy Storage
- Medical
- Rail Mass Transit
- Process Control/Automation
- Heavy Equipment




Size	Screw Termination		
	A	B	C
5.7mm	16	37.7	1
8.0mm	19	46.2	1
10.3mm	25.8	55.9	0.3




Size	Crimp Termination		
	A	B	C
5.7mm	16	40.7	1
8.0mm	19	53.7	1
10.3mm	25.8	69.2	0.3

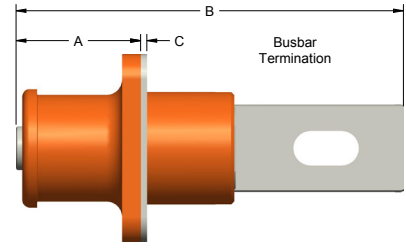


Size	Busbar Termination		
	A	B	C
5.7mm	16	47.6	1
8.0mm	19	62.2	1
10.3mm	43	68.8	0.3



Size	Plug Dimensions			
	A	B	C	D
5.7mm	22.6	58.8	30	18
8.0mm	29	75.6	38.6	21.6
10.3mm	40.5	88.5	42.5	30.3



Size	Plug Dimensions			
	A	B	C	D
8.0mm	24.6	72.4	34.8	21.4

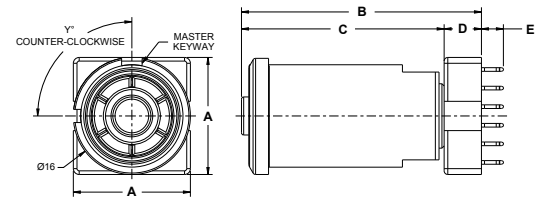

Size	Press-Fit Termination				
	A	B	C	D	E
5.7mm	16	32.8	27.7	5.1	3±0.3

Product Series: SurLok Plus™	Plug	RADSOK® Size	Applicable Cable Size	Backshells	Sealing	Connector Color	Keyway (Omit for no Keyway)	EMI	HVIL					
										0	1	2	3	4
PLUG	P Right Angle Plug 90°	A 5.7mm	16	16mm² : 100 Amps	B W/ Backshells	S IP67 Sealed (W/ Grommet & O-Rings)	O Orange	0 90°	Note: Please select both EMI and HVIL or none					
			25	25mm² : 120 Amps										
			35	35mm² : 150 Amps										
		B 8.0mm	50	50mm² : 200 Amps										
			C 10.3mm	70							70mm² : 250 Amps			
				85							85mm² : 350 Amps			
	IP Straight Plug	N W/O Backshells (For Overmolding Only)	N Non-Sealed	R Red	2 60°	3 120°	4 150°	E	EMI	H	HVIL			
												D 12mm	12	120mm² : 400 Amps
												E 14mm	18	185mm² : 500 Amps

Product Series: SurLok Plus™	Receptacle	RADSOK® Size	*Applicable Cable Size (for Crimping Termination only)	Termination Style	Panel Mount	Sealing	Connector Color	Keyway (Omit for no Keyway)	EMI	HVIL					
											0	1	2	3	4
RECEPTACLE	R Right Angle Receptacle 90° (W/O Keyway)	A 5.7mm	16	16mm² : 100 Amps	B Busbar	S IP67 Sealed (W/ Grommet & O-Rings)	O Orange	0 90°	Note: Please select both EMI and HVIL or none						
			25	25mm² : 120 Amps											
			35	35mm² : 150 Amps											
		B 8.0mm	50	50mm² : 200 Amps											
			C 10.3mm	70							70mm² : 250 Amps				
				85							85mm² : 350 Amps				
	IR Straight Receptacle (W/ Keyway)	T Threaded Post	N W/O Flange	N Non-Sealed	R Red	2 60°	3 120°	4 150°	E	EMI	H	HVIL			
													D 12mm	12	120mm² : 400 Amps
													E 14mm	18	185mm² : 500 Amps

\*Applicable cable size is only for crimping termination

Notice: Specifications are subject to change without notice. Contact your nearest Amphenol Corporation Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements of suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all connectors.

For further information on your individual application requirements, contact: Amphenol Corporation

North America:  
Amphenol Industrial Operations  
180 N. Freepoint Drive, Plant 4  
Nogales, AZ 85621  
Tel: (888) 364-9011  
Fax: (520) 285-5134

Europe:  
Amphenol Industrial Operations Europe  
Via Barbaiana 5  
1-20020 Lainate (MI) Italy  
Tel: +39 02 93254.204  
Fax: +39 02 93254.444

Middle East:  
Amphenol Middle East Enterprises FZE  
Office C-37 PO Box 21107  
Ajman Free Zone, UAE  
Tel: +9 716-7422494  
Fax: +9 716-7422941

Asia:  
Amphenol Technology (Zhuhai) Co., Ltd.  
No. 63 Xing Han Road, San Zao Town  
Jin Wan District, Zhuhai City, China 519040  
Tel: +86 756-3989760  
Fax: +86 756-3989768

Email: tech@amphenol-aio.com

Email: info@amphenol-aio.com

Email: jhussain@amphenol-industrial.com

Email: enquiry@amphenol-aio.com

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Heavy Duty Power Connectors](#) category:*

*Click to view products by [Amphenol](#) manufacturer:*

Other Similar products are found below :

[1424439](#) [1424438](#) [09330062652](#) [2-8675P1](#) [605601-1](#) [6340G1](#) [6341G1](#) [6360G1](#) [6373G1](#) [6374g2](#) [6396G1](#) [647757-1](#) [66394-4](#) [6643411-1](#)  
[6646058-2](#) [6646137-1](#) [6646138-1](#) [6646348-1](#) [6646479-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#) [6651778-1](#)  
[6651788-1](#) [696465-1](#) [696475-1](#) [73000005059](#) [73000005349](#) [73000005642](#) [73080255059](#) [73080965046](#) [765-15-0080A](#) [765-16-0080B](#)  
[789.700-44](#) [789.700-54](#) [80-1010](#) [80-9](#) [827381-1](#) [829992-1](#) [902-77-02113](#) [PL00U-301-10D10](#) [PM103MOOLOO](#) [PM16S1620S32-50](#)  
[PM212MOOLOO](#) [PM309FOOLOO](#) [PM324FOOLCH](#) [PMHPAF11S03](#)