

SLR-56 Series

Emitting Color	Green(Yello	wish Green)	Yel	low	Ora	nge	Red		
Material	Ga	aP			GaAsP	on GaP			
Emitting Surface Dimension(mm)									
Ф <u>5.0</u>		4						-	
Part No.	SLR-56MC	SLR-56MG	SLR-56YC	SLR-56YY	SLR-56DC	SLR-56DU	SLR-56VC	SLR-56VR	

Absolute Maximum Ratings (Ta=25°C)


Part No.	Emitting color	Power dissipation Pp (mW)	Forward current IF (mA)	Peak forward current *IFP (mA)	Reverse voltage VR (V)	Operating temperature T _{opr} (°C)	Storage temperature Tstg (°C)	
SLR-56MC	Green	75	25					
SLR-56MG	(Yellowish Green)	75	23					
SLR-56YC	Yellow							
SLR-56YY	renow			60	3	-25 to +85	-30 to +100	
SLR-56DC	0		20	60	3	-23 10 +83	-30 10 +100	
SLR-56DU	Orange	60	20					
SLR-56VC	Red							
SLR-56VR	nea							

*:Duty≦1/5, pulse width≦1ms.


Electrical Optical Characteristics (Ta=25°C)

Part No.	Resin Color	Forward voltage VF		Reverse current In		Light wavelength Peak Half-wave λρ Δλ			Brightness Iv		
		Тур. (V)	lF (mA)	Max. (μA)	Vr (V)	Typ. (nm)	Typ. (nm)	lF (mA)	Min. (mcd)	Typ. (mcd)	lF (mA)
SLR-56MC	Transparent Colored	2.1				563			14	40	
SLR-56MG	Diffused Colored								5.6	16	
SLR-56YC	Transparent Colored		- 10			585	40	10	9.0	25	10
SLR-56YY	Diffused Colored			10	3				5.6	10	
SLR-56DC	Transparent Colored			10		610			9.0	25	
SLR-56DU	Diffused Colored								3.6	10	
SLR-56VC	Transparent Colored					650			9.0	25	
SLR-56VR	Diffused Colored					630			3.6	10	


Dimensions (Unit:mm)

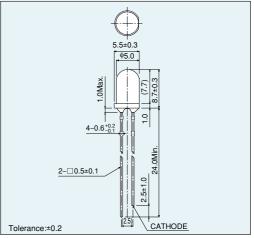


Directivity (Typ.)




Recommended Pad Layout

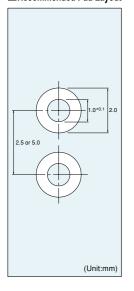


Packaging Specifications (Unit:mm)

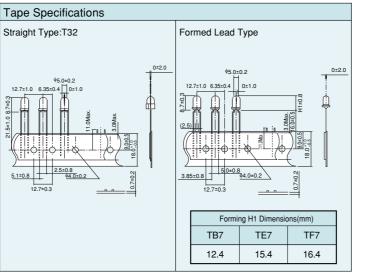

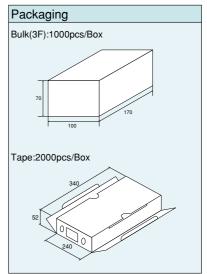


Electrical Characteristic Curves

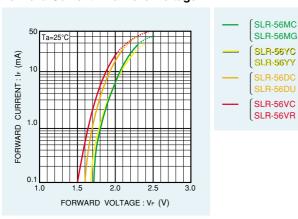



Forward Current - Forward Voltage

Relative Luminous Intensity - Case Temperature

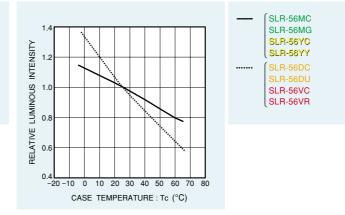


Relative Luminous Intensity - Forward Current

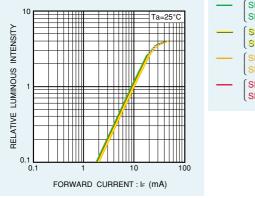




Ratio of Maximum Tolerable Peak Current - Pulse Duration





Derating

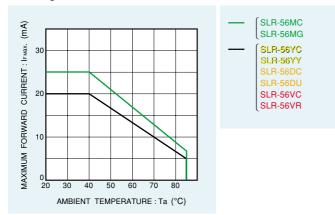

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

ROHM

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for rohm manufacturer:

Other Similar products are found below :

R6015ENZC8BP5013BP5011BP5718A12R6035ENZC8RN142ZST2RRB520S-40TE61RB886YT2RRB851YT2RMCR100JZHF30R1MCR100JZHJ150MCR50JZHFLR820MCR50JZHJ330ML610Q793-SDKMNR34J5ABJ223BD750L2FP-EVK-301BD9009HFP-EVK-001BD9285F-GE2KTR10EZPF2203SML-810TBT86RB168L-60TE25MCR100JZHF1301MCR100JZHJ4R3MCR100JZHJ513MCR100JZHJ683MCR10EZHFSR062BD9B300MUV-EVK-001MNR12ERAPJ100RF1501TF3SMNR34J5ABJ221BD9060HFP-EVK-001BD9611MUV-EVK-001BD9778HFP-TRBD9C601EFJ-EVK-001BD9D321EFJ-EVK-101BA7603F-E2BD95820N-LBBD9A100MUV-EVK-001BD9C401EFJ-EVK-001BD9C501EFJ-EVK-001BU90005GWZ-E2-EVK-101846-1001-KITLA-401XDSLA560WBD2PT2BH1790GLC-EVK-001BU33UV7NUX-EVK-101BD9B301MUV-EVK-101BA7071F-E2SK-AD01-D62Q1367TB