


**Technical Data**

**S1700 / S1703 / S1750 Series**

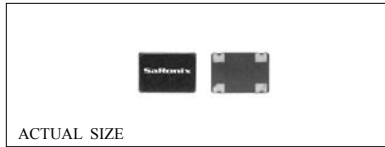

**Description**

The S1700, S1703 and S1750 are crystal-controlled, low-current oscillators providing precise rise and fall times to drive high speed CMOS and TTL loads. The sub-miniature, ceramic package has gold-plated contact pads, ideal for today's pick-and-place SMT environments and lead-free soldering. The S1750 is a high output load version available to 67 MHz.

**Applications & Features**

- Sub-miniature, very low profile package is ideal for SMT applications
- Ideal for lead-free soldering
- CMOS, HCMOS & TTL compatible
- Perfect for PC's; notebook, palmtop computers; portable applications; PC-MCIA cards; disc drives.
- S1700 for low power 5V application
- S1703 for 3.3V operations. Low-power Stand-by above 66.667MHz
- S1750 for high output load, higher fan-out applications
- Available on tape & reel; 16mm tape, 500pcs per reel

<b>Frequency Range:</b>	1.8432 MHz to 80 MHz
<b>Frequency Stability:</b>	±50 or ±100 ppm over all conditions; calibration tolerance, operating temperature, rated input (supply) voltage change, load change, aging*.
<b>*Aging:</b>	1 year @ 25°C average ambient temperature), shock and vibration.

<b>Temperature Range:</b>	
Operating:	0 to +70°C
Storage:	-55 to +125°C

<b>Supply Voltage:</b>	5.0V ±10% (S1700 & S1750) 3.3V ±10% (S1703)
------------------------	--

<b>Supply Current:</b>	S1700: 15mA max 1.8432 to 35MHz 30mA max 35+ to 66MHz 50mA max 66+ to 80MHz S1750: 20mA max 1.8432 to 20MHz 35mA max 20+ to 50MHz 60mA max 50+ to 67MHz S1703: 8mA max 1.8432 to 34MHz (5mA max disable) 12mA max 34+ to 50MHz (8mA max disable) 15mA max 50+ to 64MHz (10mA max disable) 35mA max 64+ to 66.667MHz (23mA max disable) 35mA max 66.667+ to 80MHz (10µA max disable low power standby)
------------------------	---

<b>Output:</b>	
<u>TTL</u> (S1750 only)	Symmetry: 40/60% max @ 1.5V Rise & Fall Times: 5ns max 0.5 to 2.5V Logic 0: 0.5V max Logic 1: 2.5V min Load: 5 TTL Period Jitter RMS: 8ps max
<u>HCMOS</u>	Symmetry: 45/55% max @ 50% V <sub>DD</sub> , 40/60% max for S1703 Rise & Fall Times: 10ns max, 20% to 80% V <sub>DD</sub> (5ns max S1703 67+ MHz) Logic 0: 10% V <sub>DD</sub> max Logic 1: 90% V <sub>DD</sub> min Load max: S1700: 15pF, S1703: 15pF (≤64MHz) & 30pF (64+MHz), S1750: 50pF Period Jitter RMS: 8ps max

<b>Output Enable Characteristics</b>			
	<b>S1700</b>	<b>S1750</b>	<b>S1703</b>
Output Oscillation (V <sub>IN</sub> ):	≥ 90% V <sub>DD</sub> or N/C	≥ 2.2V or N/C	≥ 2.2V or N/C
Output High Impedance (V <sub>IN</sub> ):	≤ 10% V <sub>DD</sub> or GND	≤ 0.8V GND	≤ 0.5V or GND
Disable Output Delay:	≤ 100ns	≤ 100ns	≤ 150ns
Enable Output Delay:	≤ 100ns	≤ 100ns	≤ 150ns*
Internal Pullup Resistance:	≥ 50kΩ	≥ 50kΩ	≥ 50kΩ
	* 10ms above 66.667 MHz for S1703		


<b>Mechanical:</b>	Shock: MIL-STD-883, Method 2002, Condition B Solderability: MIL-STD-883, Method 2003 Vibration: MIL-STD-883, Method 2007, Condition A Solvent Resistance: MIL-STD-202, Method 215 Resistance to Soldering Heat: MIL-STD-202, Method 210, Condition I or J
--------------------	---

<b>Environmental:</b>	Gross Leak Test: MIL-STD-883, Method 1014, Condition C Fine Leak Test: MIL-STD-883, Method 1014, Condition A2 Thermal Shock: MIL-STD-883, Method 1011, Condition A Humidity: MIL-STD-883, Method 1004
-----------------------	--


**Technical Data**

**S1700 / S1703 / S1750 Series**

**Package Details**

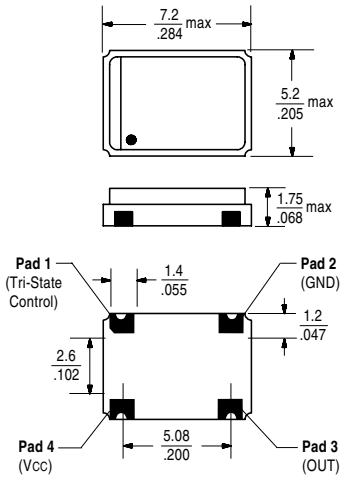


**Marking Format\***

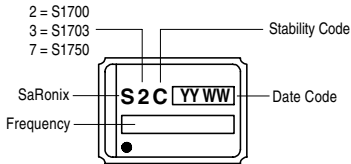

\*Exact Locations May Vary


**Recommended Land Pattern**

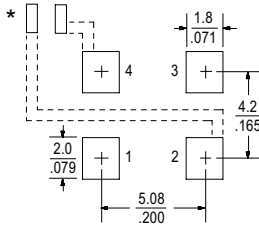


\* External power supply decoupling required.

Scale: None (Dimensions in mm / inches)

**Part Numbering Guide**

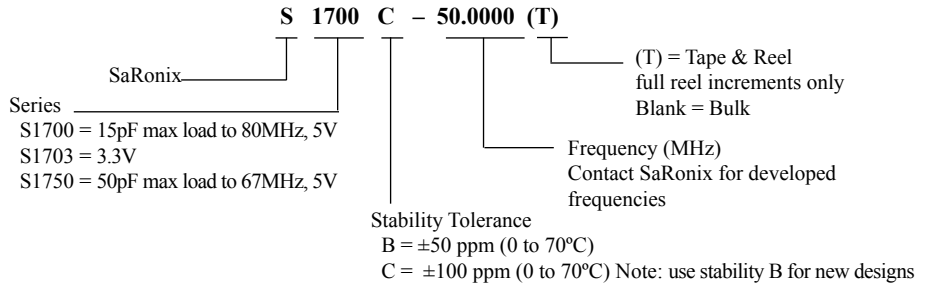


**Test Circuit**

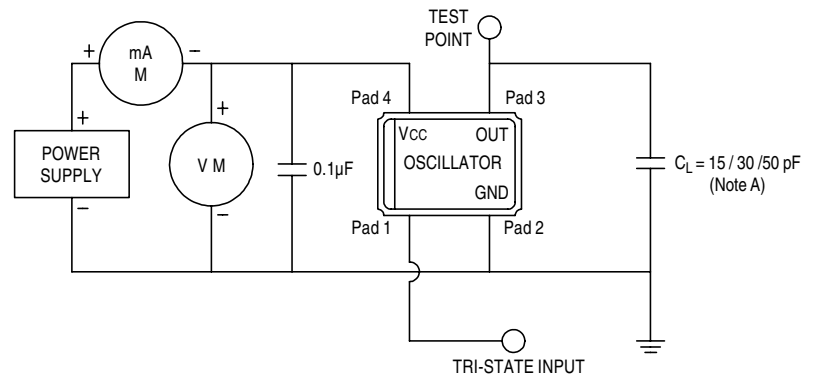


Note A: CL includes probe and fixture capacitance  
15 pF S1700 to 80 MHz  
15pF S1703 to 64 MHz (30pF to 80MHz)  
50 pF S1750 to 67 MHz

**Output Waveform**

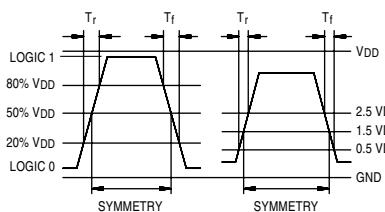

**Solder Reflow Guide**

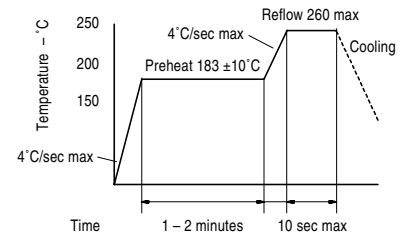

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [diodes](#) incorporated [manufacturer](#):*

Other Similar products are found below :

[1.5KE62A-T](#) [DMN2065UW-7](#) [AH3782-SA-7](#) [AP7365-39WG-7](#) [MBRB10100CT](#) [AZ1117EH-5.0TRG1](#) [AZV3002S-13](#) [PAM2863EV1](#)  
[SBRT25U60SLP-13](#) [LM2904AQM8-13](#) [GBPC1506](#) [GBU804](#) [GBU808](#) [BCR401UW6-7](#) [DMP4013LFG-7](#) [DMTH6009LK3Q-13](#) [SB560-T](#)  
[AP3125AKTR-G1](#) [FMMT491ATA](#) [AZV832MMTR-G1](#) [6A6-T](#) [BZX84C5V1TS-7-F](#) [DMP6180SK3-13](#) [BZT52C15LP-7](#) [74LVC1G58W6-7](#)  
[DDTC114ELP-7](#) [BAS40](#) [1N5402-T](#) [ZMR330FTA](#) [ZVN4525E6TA](#) [SBR40100CT](#) [FZT605TA](#) [BZT52C2V4Q-7-F](#) [BZX84C15-13-F](#)  
[BZX84C3V9Q-7-F](#) [BZX84C4V7-13-F](#) [BZX84C5V1-13-F](#) [BZX84C3V9](#) [ZXLD1370/1EV4](#) [AP64501SP-EVM](#) [AP63203WU-EVM](#)  
[AP63200WU-EVM](#) [AP63201WU-EVM](#) [AP63356DV-EVM](#) [DMN30H4D0L-7](#) [DFLT48A-7](#) [ZVNL110A](#) [ZXSC100N8TA](#) [ZXTN4002ZTA](#)  
[ZXTP25140BFHTA](#)