

# SMCJ5.0(C)A THRU SMCJ440(C)A

## Features

- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)
- For surface mount application in order to optimize board space
- Built-in strain relief
- Glass passivated junction
- Typical  $I_D$  less than 1uA above 10V
- High temperature soldering: 260°C/10 seconds at terminals
- Plastic package has Underwrites Laboratory Flammability
- Halogen free available upon request by adding suffix "-HF"
- UL Recognized File # E331408

**Transient  
 Voltage Suppressor  
 5.0 to 440 Volts  
 1500 Watt**


## Mechanical Data

- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Terminals: solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes positive end( cathode) except Bi-directional types.
- Standard packaging: 16mm tape per ( EIA 481).
- Weight: 0.007 ounce, 0.21 gram

### Maximum Ratings @ 25°C Unless Otherwise Specified


|                                                                   |                |                 |       |
|-------------------------------------------------------------------|----------------|-----------------|-------|
| Peak Pulse Current on 10/1000us waveform(Note2, Fig4)             | $I_{PPM}$      | See Table 1     | Amps  |
| Peak Pulse Power Dissipation on 10/1000us waveform(Note2,3, Fig1) | $P_{PPM}$      | Minimum 1500    | Watts |
| Operation And Storage Temperature Range                           | $T_J, T_{STG}$ | -55°C to +175°C |       |

### DO-214AB (SMC) (LEAD FRAME)

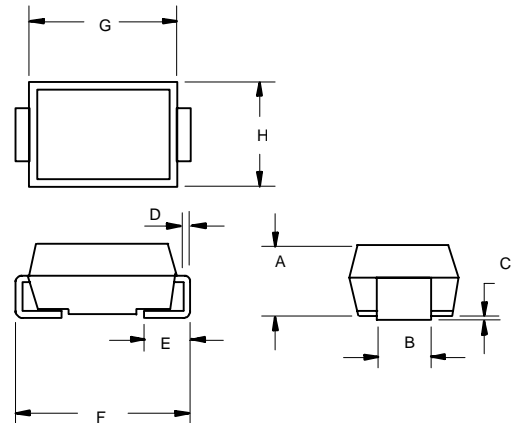

| DIM | INCHES |      | MM    |       | NOTE |
|-----|--------|------|-------|-------|------|
|     | MIN    | MAX  | MIN   | MAX   |      |
| A   | .079   | .103 | 2.00  | 2.62  |      |
| B   | .108   | .128 | 2.75  | 3.25  |      |
| C   | .002   | .008 | 0.051 | 0.203 |      |
| D   | .006   | .012 | 0.152 | 0.305 |      |
| E   | .030   | .060 | 0.76  | 1.52  |      |
| F   | .305   | .320 | 7.75  | 8.13  |      |
| G   | .260   | .280 | 6.60  | 7.11  |      |
| H   | .220   | .245 | 5.59  | 6.22  |      |

### SUGGESTED SOLDER PAD LAYOUT

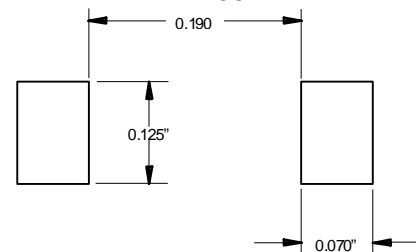

Notes: 1. High Temperature Solder Exemptions Applied, see EU Directive Annex 7.  
 2. Non-repetitive current pulse per Fig.3 and derated above  $T_A=25^\circ\text{C}$  per Fig.2.  
 3. Mounted on 8.0mm<sup>2</sup> copper pads to each terminal.  
 4. Unidirectional and bidirectional available, for bidirectional devices add 'C' suffix to the pn#, i.e. SMCJ5.0CA

# SMCJ5.0 THRU SMCJ440CA

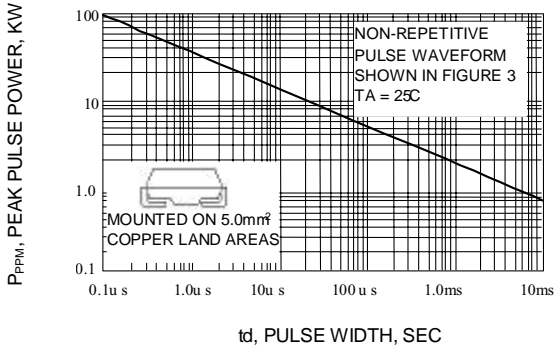


Fig. 1-PEAK PULSE POWER RATING CURVE

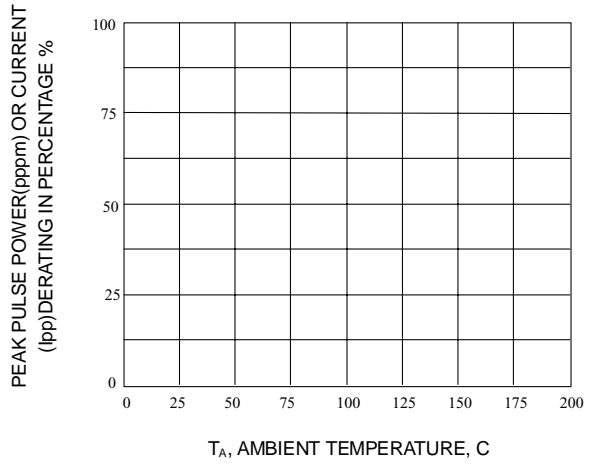


Fig. 2-PULSE DERATING CURVE

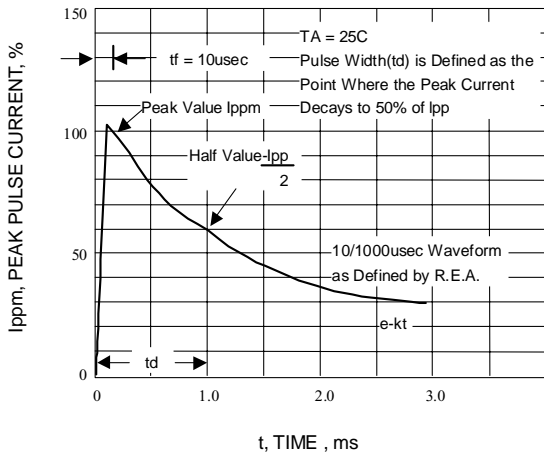


Fig. 3-PULSE WAVEFORM

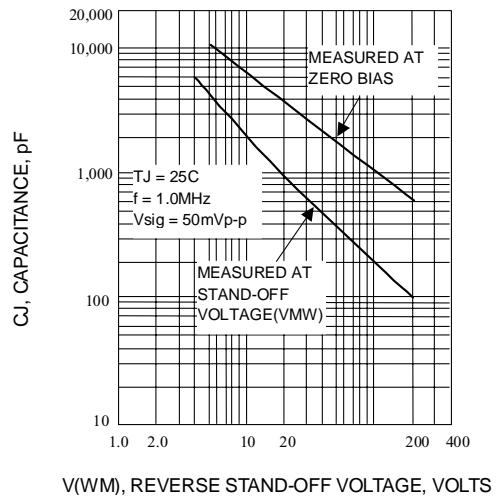


Fig. 4-TYPICAL JUNCTION CAPACITANCE

# SMCJ5.0 THRU SMCJ440CA



Micro Commercial Components

## ELECTRICAL CHARACTERISTICS @25°C

| MCC Part Number |           | Reverse Stand -Off Voltage | Breakdown Voltage $V_{BR}(V)$ |       | Test Current | Max. Clamping Voltage @ $I_{PP}$ | Peak Pulse Current | Reverse Leakage Current@ $V_{WM}$ | Marking Code |     |
|-----------------|-----------|----------------------------|-------------------------------|-------|--------------|----------------------------------|--------------------|-----------------------------------|--------------|-----|
| Uni-Polar       | Bi-Polar  | $V_{WM}(V)$                | Min                           | Max   | $I_T(mA)$    | $V_C(V)$                         | $I_{PP}(A)$        | $I_D(\mu A)$                      | UNI          | BI  |
| SMCJ5.0A        | SMCJ5.0CA | 5                          | 6.4                           | 7.0   | 10           | 9.2                              | 163.0              | 800                               | GDE          | BDE |
| SMCJ6.0A        | SMCJ6.0CA | 6                          | 6.7                           | 7.4   | 10           | 10.3                             | 145.7              | 800                               | GDG          | BDG |
| SMCJ6.5A        | SMCJ6.5CA | 6.5                        | 7.2                           | 8.0   | 10           | 11.2                             | 134.0              | 500                               | GDK          | BDK |
| SMCJ7.0A        | SMCJ7.0CA | 7                          | 7.8                           | 8.6   | 10           | 12.0                             | 125.0              | 200                               | GDM          | BDM |
| SMCJ7.5A        | SMCJ7.5CA | 7.5                        | 8.3                           | 9.2   | 1            | 12.9                             | 116.3              | 100                               | GDP          | BDP |
| SMCJ8.0A        | SMCJ8.0CA | 8                          | 8.9                           | 9.8   | 1            | 13.6                             | 110.3              | 50                                | GDR          | BDR |
| SMCJ8.5A        | SMCJ8.5CA | 8.5                        | 9.4                           | 10.4  | 1            | 14.4                             | 104.2              | 20                                | GDT          | BDT |
| SMCJ9.0A        | SMCJ9.0CA | 9                          | 10.0                          | 11.1  | 1            | 15.4                             | 97.4               | 10                                | GDV          | BDV |
| SMCJ10A         | SMCJ10CA  | 10                         | 11.1                          | 12.3  | 1            | 17.0                             | 88.3               | 5                                 | GDY          | BDY |
| SMCJ11A         | SMCJ11CA  | 11                         | 12.2                          | 13.5  | 1            | 18.2                             | 82.5               | 5                                 | GDZ          | BDZ |
| SMCJ12A         | SMCJ12CA  | 12                         | 13.3                          | 14.7  | 1            | 19.9                             | 75.4               | 5                                 | GEE          | BEE |
| SMCJ13A         | SMCJ13CA  | 13                         | 14.4                          | 15.9  | 1            | 21.5                             | 69.8               | 5                                 | GEG          | BEG |
| SMCJ14A         | SMCJ14CA  | 14                         | 15.6                          | 17.2  | 1            | 23.2                             | 64.7               | 5                                 | GEK          | BEK |
| SMCJ15A         | SMCJ15CA  | 15                         | 16.7                          | 18.5  | 1            | 24.4                             | 61.5               | 5                                 | GEM          | BEM |
| SMCJ16A         | SMCJ16CA  | 16                         | 17.8                          | 19.7  | 1            | 26.0                             | 57.7               | 5                                 | GEP          | BEP |
| SMCJ17A         | SMCJ17CA  | 17                         | 18.9                          | 20.9  | 1            | 27.6                             | 54.4               | 5                                 | GER          | BER |
| SMCJ18A         | SMCJ18CA  | 18                         | 20.0                          | 22.1  | 1            | 29.2                             | 51.4               | 5                                 | GET          | BET |
| SMCJ20A         | SMCJ20CA  | 20                         | 22.2                          | 24.5  | 1            | 32.4                             | 46.3               | 5                                 | GEV          | BEV |
| SMCJ22A         | SMCJ22CA  | 22                         | 24.4                          | 26.9  | 1            | 35.5                             | 42.3               | 5                                 | GEX          | BEX |
| SMCJ24A         | SMCJ24CA  | 24                         | 26.7                          | 29.5  | 1            | 38.9                             | 38.6               | 5                                 | GEZ          | BEZ |
| SMCJ26A         | SMCJ26CA  | 26                         | 28.9                          | 31.9  | 1            | 42.1                             | 35.7               | 5                                 | GFE          | BFE |
| SMCJ28A         | SMCJ28CA  | 28                         | 31.1                          | 34.4  | 1            | 45.4                             | 33.1               | 5                                 | GFG          | BFG |
| SMCJ30A         | SMCJ30CA  | 30                         | 33.3                          | 36.8  | 1            | 48.4                             | 31.0               | 5                                 | GFK          | BFK |
| SMCJ33A         | SMCJ33CA  | 33                         | 36.7                          | 40.6  | 1            | 53.3                             | 28.2               | 5                                 | GFM          | BFM |
| SMCJ36A         | SMCJ36CA  | 36                         | 40.0                          | 44.2  | 1            | 58.1                             | 25.9               | 5                                 | GFP          | BFP |
| SMCJ40A         | SMCJ40CA  | 40                         | 44.4                          | 49.1  | 1            | 64.5                             | 23.3               | 5                                 | GFR          | BFR |
| SMCJ43A         | SMCJ43CA  | 43                         | 47.8                          | 52.8  | 1            | 69.4                             | 21.7               | 5                                 | GFT          | BFT |
| SMCJ45A         | SMCJ45CA  | 45                         | 50.0                          | 55.3  | 1            | 72.7                             | 20.6               | 5                                 | GFV          | BFV |
| SMCJ48A         | SMCJ48CA  | 48                         | 53.3                          | 58.9  | 1            | 77.4                             | 19.4               | 5                                 | GFX          | BFX |
| SMCJ51A         | SMCJ51CA  | 51                         | 56.7                          | 62.7  | 1            | 82.4                             | 18.2               | 5                                 | GFZ          | BFZ |
| SMCJ54A         | SMCJ54CA  | 54                         | 60.0                          | 66.3  | 1            | 87.1                             | 17.3               | 5                                 | GGE          | BGE |
| SMCJ58A         | SMCJ58CA  | 58                         | 64.4                          | 71.2  | 1            | 93.6                             | 16.1               | 5                                 | GGG          | BGG |
| SMCJ60A         | SMCJ60CA  | 60                         | 66.7                          | 73.7  | 1            | 96.8                             | 15.5               | 5                                 | GGK          | BGK |
| SMCJ64A         | SMCJ64CA  | 64                         | 71.1                          | 78.6  | 1            | 103.0                            | 14.6               | 5                                 | GGM          | BGM |
| SMCJ70A         | SMCJ70CA  | 70                         | 77.8                          | 86.0  | 1            | 113.0                            | 13.3               | 5                                 | GGP          | BGP |
| SMCJ75A         | SMCJ75CA  | 75                         | 83.3                          | 92.1  | 1            | 121.0                            | 12.4               | 5                                 | GGR          | BGR |
| SMCJ78A         | SMCJ78CA  | 78                         | 86.7                          | 95.8  | 1            | 126.0                            | 11.9               | 5                                 | GGT          | BGT |
| SMCJ85A         | SMCJ85CA  | 85                         | 94.4                          | 104.0 | 1            | 137.0                            | 11.0               | 5                                 | GGV          | BGV |
| SMCJ90A         | SMCJ90CA  | 90                         | 100.0                         | 111.0 | 1            | 146.0                            | 10.3               | 5                                 | GGX          | BGX |
| SMCJ100A        | SMCJ100CA | 100                        | 111.0                         | 123.0 | 1            | 162.0                            | 9.3                | 5                                 | GGZ          | BGZ |

For bi-directional type having  $V_{RWM}$  of 10volts and less, the IR limit is double. For parts without A, the VBR is  $\pm 10\%$

# SMCJ5.0 THRU SMCJ440CA



Micro Commercial Components

## ELECTRICAL CHARACTERISTICS @25°C

| MCC Part Number |           | Reverse Standard - Off Voltage | Breakdown Voltage $V_{BR}(V)$ |       | Test Current | Max. Clamping Voltage @ $I_{PP}$ | Peak Pulse Current | Reverse Leakage Current@ $V_{WM}$ | Marking Code |     |
|-----------------|-----------|--------------------------------|-------------------------------|-------|--------------|----------------------------------|--------------------|-----------------------------------|--------------|-----|
| Uni-Polar       | Bi-Polar  | $V_{WM}(V)$                    | Min                           | Max   | $I_T(mA)$    | $V_C(V)$                         | $I_{PP}(A)$        | $I_D(\mu A)$                      | UNI          | BI  |
| SMCJ110A        | SMCJ110CA | 110                            | 122.0                         | 135.0 | 1            | 177                              | 8.5                | 5                                 | GHE          | BHE |
| SMCJ120A        | SMCJ120CA | 120                            | 133.0                         | 147.0 | 1            | 193                              | 7.8                | 5                                 | GHG          | BHG |
| SMCJ130A        | SMCJ130CA | 130                            | 144.0                         | 159.0 | 1            | 209                              | 7.2                | 5                                 | GHK          | BHK |
| SMCJ150A        | SMCJ150CA | 150                            | 167.0                         | 185.0 | 1            | 243                              | 6.2                | 5                                 | GHM          | BHM |
| SMCJ160A        | SMCJ160CA | 160                            | 178.0                         | 197.0 | 1            | 259                              | 5.8                | 5                                 | GHP          | BHP |
| SMCJ170A        | SMCJ170CA | 170                            | 189.0                         | 209.0 | 1            | 275                              | 5.5                | 5                                 | GHR          | BHR |
| SMCJ180A        | SMCJ180CA | 180                            | 201.0                         | 222.0 | 1            | 292                              | 5.1                | 5                                 | GHT          | BHT |
| SMCJ200A        | SMCJ200CA | 200                            | 224.0                         | 247.0 | 1            | 324                              | 4.6                | 5                                 | GHV          | BHV |
| SMCJ220A        | SMCJ220CA | 220                            | 246.0                         | 272.0 | 1            | 356                              | 4.2                | 5                                 | GHX          | BHX |
| SMCJ250A        | SMCJ250CA | 250                            | 279.0                         | 309.0 | 1            | 405                              | 3.7                | 5                                 | GHZ          | BHZ |
| SMCJ300A        | SMCJ300CA | 300                            | 335.0                         | 371.0 | 1            | 486                              | 3.1                | 5                                 | GJE          | BJE |
| SMCJ350A        | SMCJ350CA | 350                            | 391.0                         | 432.0 | 1            | 567                              | 2.6                | 5                                 | GJG          | BJG |
| SMCJ400A        | SMCJ400CA | 400                            | 447.0                         | 494.0 | 1            | 648                              | 2.3                | 5                                 | GJK          | BJK |
| SMCJ440A        | SMCJ440CA | 440                            | 492.0                         | 543.0 | 1            | 713                              | 2.1                | 5                                 | GJM          | BJM |

For bi-directional type having  $V_{rwm}$  of 10volts and less, the IR limit is double. For parts without A, the VBR is  $\pm 10\%$



Micro Commercial Components

### Ordering Information :

| Device         | Packing               |
|----------------|-----------------------|
| Part Number-TP | Tape&Reel: 3Kpcs/Reel |

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

#### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

#### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

#### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

[www.mccsemi.com](http://www.mccsemi.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [Micro Commercial Components \(MCC\)](#) manufacturer:*

Other Similar products are found below :

[NTE4902](#) [P4SMAJ15A](#) [P4SMAJ26A](#) [SMAJ400CA-TP](#) [TGL34-47CA](#) [ESDAULC45-1BF4](#) [SM1605E3/TR13](#) [SMF20A-TP](#) [P4SMAJ12A](#)  
[CPDUR24V-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [MPLAD30KP45CAE3](#) [MMBZ27VCLQ-7-F](#) [MMAD1108/TR13](#) [MPLAD30KP24A](#)  
[ACPDQC5V0R-HF](#) [DFLT170A-7](#) [NTE4900](#) [NTE4926](#) [NTE4938](#) [SMF22A-TP](#) [SMF12A-TP](#) [SLVU2.8-TP](#) [SMLJ6.5CA-TP](#) [SMAJ6.5CA-TP](#)  
[MMAD1108E3/TR13](#) [D5V0M1U2LP3-7](#) [SMAJ400A-TP](#) [AOZ8811DT-03](#) [AOZ8831DI-05](#) [AOZ8831DT-03](#) [SMAJ188CA](#) [3SMC33CA](#)  
[BK](#) [CPDQC3V3C-HF](#) [CPDQC12VE-HF](#) [MPLAD30KP170CA](#) [82357120100](#) [5.0SMLJ15CA-TP](#) [5KP18A-TP](#) [P6KE8.2A-TP](#)  
[MPLAD30KP43CAE3](#) [SMAJ43A-TP](#) [D5V0F6U8LP33-7](#) [TVS5501V10MUT5G](#) [5.0SMLJ24CA-TP](#) [SMAJ110CA-TP](#) [MPLAD15KP75CAE3](#)  
[MMAD1103e3/TR13](#) [DFLT40AQ-7](#)