

Ƴ 🖬 f ▼



✓ Active

 PRODUCT DRAWING English
 3D PDF

TE CONNECTIVITY (TE) 03P SL156 HSG W/LCK RAMP NATL MTA | SL-156

640250-3 TE Internal Number: 640250-3

Always EU RoHS/ELV Compliant

Centerline 3.96 mm [.156 in]

Number of Positions **3**

Number of Rows **1**

Color Natural

Mating Retention With

Product Drawings	HOUSING WITH LOCKING RAMP, SL-156 PDF English		
CAD Files	3D PDF		
	PDF 3D		
	Customer View Model		
	2D_DXF.ZIP English		
	Customer View Model		
	3D_IGS.ZIP English		
	Customer View Model		
	3D_STP.ZIP English		
Catalog Pages/Data Sheets	MTA, CST-100 II, SL-156 And AMP Economy Power (EP) Connectors PDF English		
Product Specifications			
Product Specification	Hooded SL 156 Connectors, Tin		
	PDF English		
	Hooded SL 156 Connectors, Gold		
	PDF English		
	SL 156 Connectors		
	PDF English		
Application Specification	SL 156 Contacts And Housings PDF		
	English		

Product Environmental Compliance

Please review product documents or **contact us** for the latest agency approval information. Please Note: Use the Product Drawing for all design activity.

Product Type Features	Sealed	Νο
	Connector Type	Housing
	Applies To	Wire/Cable
	Connector Style	Receptacle
	Connector System	Wire-to-Board
	Strain Relief	Without
	Product Type	Connector
Configuration Features	Number of Positions	3
	Number of Rows	1
Electrical Characteristics	Operating Voltage	250 VAC
Body Features	Color	Natural
Contact Features	Contact Type	Socket
	Contact Current Rating (A)	6.5
	Contact Layout	Inline
Termination Features	Termination Method to Wire/Cable	Crimp
Mechanical Attachment	Mating Retention	With
	Mating Retention Type	Locking Ramp
	PCB Mount Retention	Without
	Panel Mount Retention	Without
	Mating Alignment	Without
	Contact Retention	Without
	PCB Mount Alignment	Without

Centerline


Housing Configuration

		Leit End Open
	Housing Color	Natural
	Housing Style	Standard
	Housing Material	Nylon - GF
Dimensions	Height (mm)	6.35
	Length (in)	.465
	Wire/Cable Size (AWG)	30 – 18
	Wire/Cable Size (mm²)	.0509 – .823
Usage Conditions	Operating Temperature Range	-55 – 105 °C [-67 – 221 °F]
Operation/Application	For Use With	SL .156 Contacts
Industry Standards	CSA File Number	LR 7189
	Agency/Standard	CSA, UL
	UL File Number	E28476
	UL Rating	Listed
	UL Flammability Rating	UL 94V-0
	CSA Rating	Certified
Packaging Features	Packaging Quantity	500
	Packaging Method	Bag/Box
Other	Comment	Unit Accepts 1.14[.045] Square or Round Post, Accepts Keying Plug 640254-1and 640255-1
Product Compliance	Statement of Compliance PDF	


VIEW ALL PRODUCT COMPLIANCE

CUSTOMERS ALSO BOUGHT



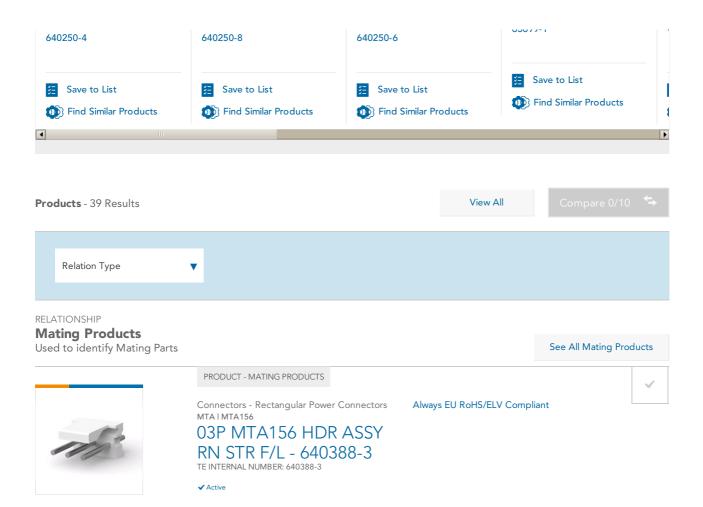

RELATIONSHIP **Mating Products** Used to identify Mating Parts

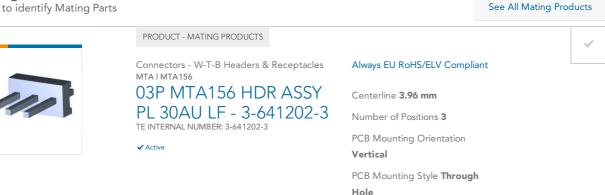

Number of Rows 1

RELATIONSHIP **Mating Products** Used to identify Mating Parts

See All Mating Products



PRODUCT - MATING PRODUCTS

Connectors - W-T-B Headers & Receptacles MTAIMTA156 03P MTA156 HDR ASSY PL 30ALLER 3 641203 3

PL 30AU LF - 3-641203-3 TE INTERNAL NUMBER: 3-641203-3

✓ Active

Always EU RoHS/ELV Compliant

Centerline 3.96 mm

Number of Positions 3

PCB Mounting Orientation

vertical

PCB Mounting Style **Through** Hole

Number of Rows **1**

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Headers & Wire Housings category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

95000-104TRLF 10135584-644402LF DF62W-EP2022PCA 95000-106TRLF DF62W-2022SCA DF62W-EP2022PC 2203348 DF62W-2022SC 1084018 1029039 1084017 802-10-012-10-002000 1112640 1112639 000-34000 0009482033 0009507031 57102-S06-03LF 57202-S52-04LF PCN6-15S-2.5E 0039019024 58102-G61-06LF 582553-1 0009485154 0009508121 0022285053 0050291907 018731A LY20-4P-DT1-P1E-BR 02.125.8002.8 60101931 60598-1 (Cut Strip) M1625-3R/100 61062-3 61082-181009 636-1427 638009-1 641938-9 641991-4 644168-1 647662-1 65039-019ELF 65817-002LF 65817-015LF 65863-015LF 66207-023LF 67016-026LF 67046-001LF 67095-007LF 67230-005LF