



## BOARD-TO-BOARD HEADERS & RECEPTACLES



Active

PRODUCT DRAWING  
English

3D PDF

TE CONNECTIVITY (TE)

0.8FH,R05H.5,100,08/Sn,TU

0.8mm FH | .8mm FH

5177983-4

TE Internal Number: 5177983-4

Always EU RoHS/ELV Compliant

Connector Style **Receptacle**

Centerline **.031 mm [ .8 in ]**

Stack Height (mm) **5, 6, 7, 8**

Stack Height (in) **.315**

Number of Positions **100**

Packaging Method **Tube, Tube/Box**

### Product Drawings

RECEPTACLE ASSEMBLY 5H TYPE (0.5 BOSS LENGTH) FOR FH 0.8MM PITCH B-T-B CONNECTOR

PDF (TIFF AVAILABLE)  
English

RECEPTACLE ASSEMBLY 5H TYPE (0.5 BOSS LENGTH) FOR FH 0.8MM PITCH B-T-B CONNECTOR

PDF (TIFF AVAILABLE)  
English

### CAD Files

3D PDF

PDF  
3D

Customer View Model

2D\_DXF.ZIP  
English

Customer View Model

3D\_IGS.ZIP  
English

Customer View Model

3D\_STP.ZIP  
English

### Catalog Pages/Data Sheets

Fine Pitch Stacking Connectors - 0.8mm Free Height (FH) Connectors

PDF  
English

2-1773454-6\_Stacking\_Connectors

PDF  
English

### Product Specifications

Product Specification

Free Height 0.8 Mm Pitch Board-To-Board Connector (SMT)

PDF  
English

### Product Environmental Compliance

TE Material Declaration

0.8FH,R05H.5,100,08/Sn,TU

Please review product documents or [contact us](#) for the latest agency approval information. Please Note: Use the Product Drawing for all design activity.

---

Product Type Features	Connector Style	<b>Receptacle</b>
	Board-to-Board Configuration	<b>Mezzanine</b>
	PCB Mounting Orientation	<b>Vertical</b>
	Row-to-Row Spacing	<b>2.4 mm [ .09432 in ]</b>
	Applies To	<b>Printed Circuit Board</b>
	Product Type	<b>Connector</b>
	Boss	<b>With</b>
	Series	<b>Free Height</b>

---

Configuration Features	Number of Positions	<b>100</b>
	Preloaded	<b>Yes</b>
	Number of Rows	<b>2</b>
	Stackable	<b>Yes</b>

---

Electrical Characteristics	Insulation Resistance (VAC)	<b>500</b>
	Voltage (VAC)	<b>100</b>
	Dielectric Withstanding Voltage (VAC)	<b>500</b>

---

Body Features	Sealant	<b>Without</b>
---------------	---------	----------------

---

Contact Features	Contact Mating Area Plating Material	<b>Gold</b>
	Contact Mating Area Plating Thickness (µin)	<b>8</b>
	Contact Shape	<b>Square</b>
	Contact Current Rating (A)	<b>.5</b>
	Contact Type	<b>Socket</b>
	Solder Tail Contact Plating Material	<b>Tin over Nickel</b>
	Contact Layout	<b>Inline</b>
	Solder Tail Contact Plating Material Finish	<b>Matte</b>
	Solder Tail Contact Plating Thickness	<b>2 µm [ 78.74 µin ]</b>
	Contact Base Material	<b>Copper Alloy</b>


---

Termination Features	Termination Method to PC Board	<b>Surface Mount</b>
----------------------	--------------------------------	----------------------

Termination Features	Termination Method to PCB Board	Termination Feature
Mechanical Attachment	Mating Alignment Type	<b>Polarized</b>
	PCB Mount Retention	<b>Without</b>
	PCB Mount Retention Type	<b>None</b>
	PCB Mount Alignment Type	<b>Positioning Bosses</b>
	Locating Post Length (mm)	<b>.5</b>
	Locating Post Length (in)	<b>.0196</b>
Housing Features	Centerline	<b>.031 mm [.8 in]</b>
	Housing Material	<b>LCP (Liquid Crystal Polymer)</b>
	Housing Color	<b>Natural</b>
	Housing Entry Style	<b>Top</b>
Dimensions	Stack Height (mm)	<b>5, 6, 7, 8</b>
	Stack Height (in)	<b>.315</b>
	Height	<b>5 mm [.197 in]</b>
Usage Conditions	Operating Temperature Range	<b>-40 – 85 °C [-40 – 185 °F]</b>
	Housing Material Temperature	<b>High</b>
Operation/Application	Pick and Place Cover	<b>Without</b>
	Assembly Process Feature	<b>None</b>
	For Use With	<b>Plug Assembly</b>
Industry Standards	UL Flammability Rating	<b>UL 94V-0</b>
Packaging Features	Packaging Method	<b>Tube, Tube/Box</b>
	Packaging Quantity	<b>10</b>
Product Compliance	<a href="#">Statement of Compliance PDF</a> <a href="#">VIEW ALL PRODUCT COMPLIANCE</a>	

## CUSTOMERS ALSO BOUGHT

<a href="#">BOARD-TO-BOARD HEADERS &amp; RECEPTACLES</a> 	<a href="#">SURFACE MOUNT RESISTORS</a> 	<a href="#">SURFACE MOUNT RESISTORS</a> 	
--	---	---	---

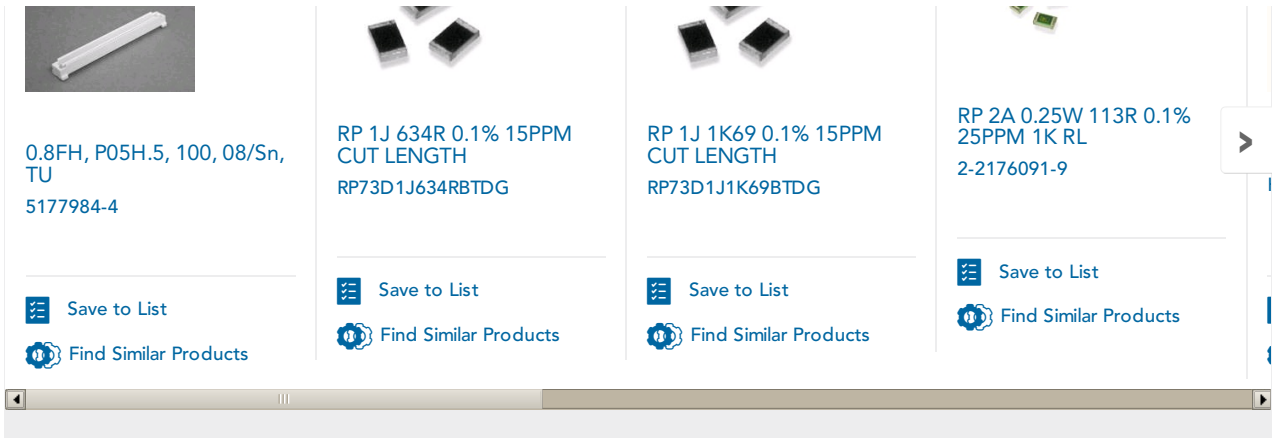

Products - 17 Results

[View All](#)

[Compare 0/10](#)


Relation Type ▼

RELATIONSHIP

**Mating Products**

Used to identify Mating Parts

[See All Mating Products](#)


PRODUCT - MATING PRODUCTS		<input checked="" type="checkbox"/>
	<p>Connectors - Board-to-Board Headers &amp; Receptacles 0.8mm FH   .8mm FH</p> <p><b>0.8FH, P05H.5, 100, 08/Sn, TU - 5177984-4</b></p> <p>TE INTERNAL NUMBER: 5177984-4</p> <p>✓ Active</p>	<p>Always EU RoHS/ELV Compliant</p> <p>Connector Style <b>Plug</b></p> <p>Centerline <b>.031 mm</b></p> <p>Stack Height <b>5 mm, 9 mm, 13 mm, 17 mm</b></p> <p>Number of Positions <b>100</b></p> <p>Packaging Method <b>Tube, Tube/Box</b></p>

RELATIONSHIP

**Mating Products**

Used to identify Mating Parts

[See All Mating Products](#)

PRODUCT - MATING PRODUCTS		<input checked="" type="checkbox"/>
	<p>Connectors - Board-to-Board Headers &amp; Receptacles 0.8mm FH   .8mm FH</p> <p><b>0.8FH, P08H.5, 100, 30/Sn, TU - 6123002-4</b></p> <p>TE INTERNAL NUMBER: 6123002-4</p> <p>✓ Active</p>	<p>Always EU RoHS/ELV Compliant</p> <p>Connector Style <b>Plug</b></p> <p>Centerline <b>.031 mm</b></p> <p>Stack Height <b>8 mm, 12 mm, 16 mm, 20 mm</b></p> <p>Number of Positions <b>100</b></p> <p>Packaging Method <b>Tube, Tube/Box</b></p>

RELATIONSHIP

**Mating Products**

Used to identify Mating Parts

[See All Mating Products](#)

PRODUCT - MATING PRODUCTS



Connectors - Board-to-Board Headers & Receptacles  
0.8mm FH | .8mm FH

**0.8FH, P06H.5, 100,  
30/Sn, TR, SC**  
**- 6-5177986-4**

TE INTERNAL NUMBER: 6-5177986-4

✓ Active

Always EU RoHS/ELV Compliant

Connector Style **Plug**

Centerline **.031 mm**

Stack Height **6 mm, 10 mm, 14 mm, 18 mm**

Number of Positions **100**

Packaging Method **Tape & Reel**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[10135583-642402LF](#) [89885-310LF](#) [589158040000018](#) [6-1393048-0](#) [68683-613](#) [MDF7-12DP-2.54DSA](#) [MDF7-18P-2.54DSA\(01\)](#) [MDF7-20DP-2.54DSA](#) [MDF7-26D-2.54DSA\(55\)](#) [MDF7-3P-2.54DSA\(01\)](#) [MDF7B-3P-2.54DSA\(55\)](#) [MDF7C-11P-2.54DSA\(55\)](#) [MDF7C-18P-2.54DSA\(55\)](#) [MDF7C-5P-2.54DSA\(01\)](#) [MDF7P-5P-2.54DSA\(55\)](#) [75234-0516](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-360C008-C](#) [FCN-360C040-C](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [93696-325LF](#) [11828-1FA](#) [AXK630345P](#) [18097-0013](#) [ICA-328STT](#) [2007042-2](#) [304400-2](#) [FCN-214Q030-G/0](#) [FCN-215Q040-G/0](#) [FCN-230C068-ESA](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [FCN-360A3](#) [FCN-360C040-B](#) [210-93-314-41-105000](#) [2-22603-0](#) [379-064-521-202](#) [MDF7-12P-2.54DSA\(01\)](#) [MDF7-16P-2.54DS\(56\)](#) [MDF7-40DP-2.54DSA\(55\)](#) [MDF7-8P-2.54DSA\(55\)](#) [MDF7B-16P-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#)