
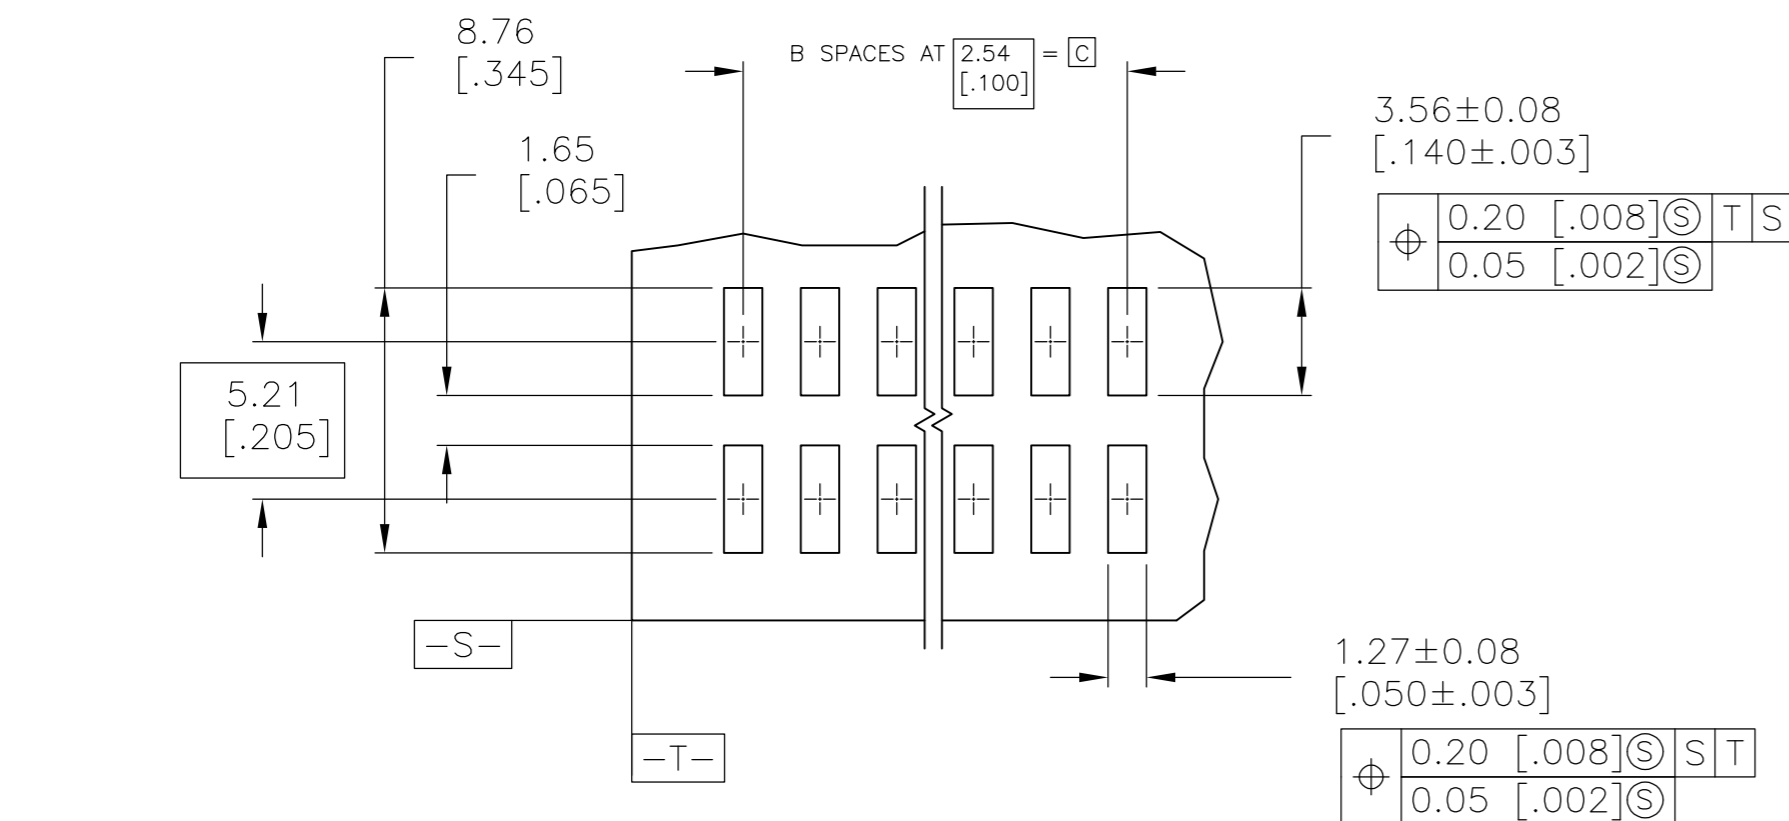
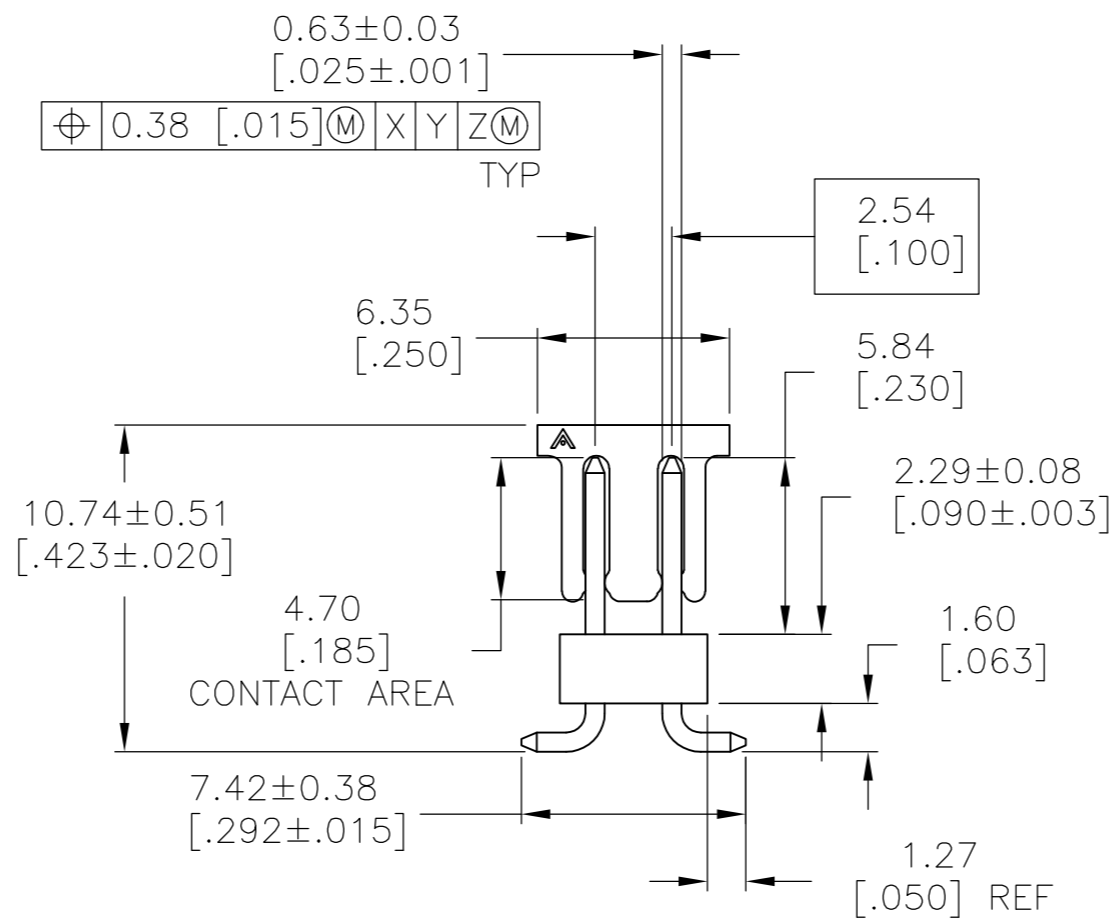
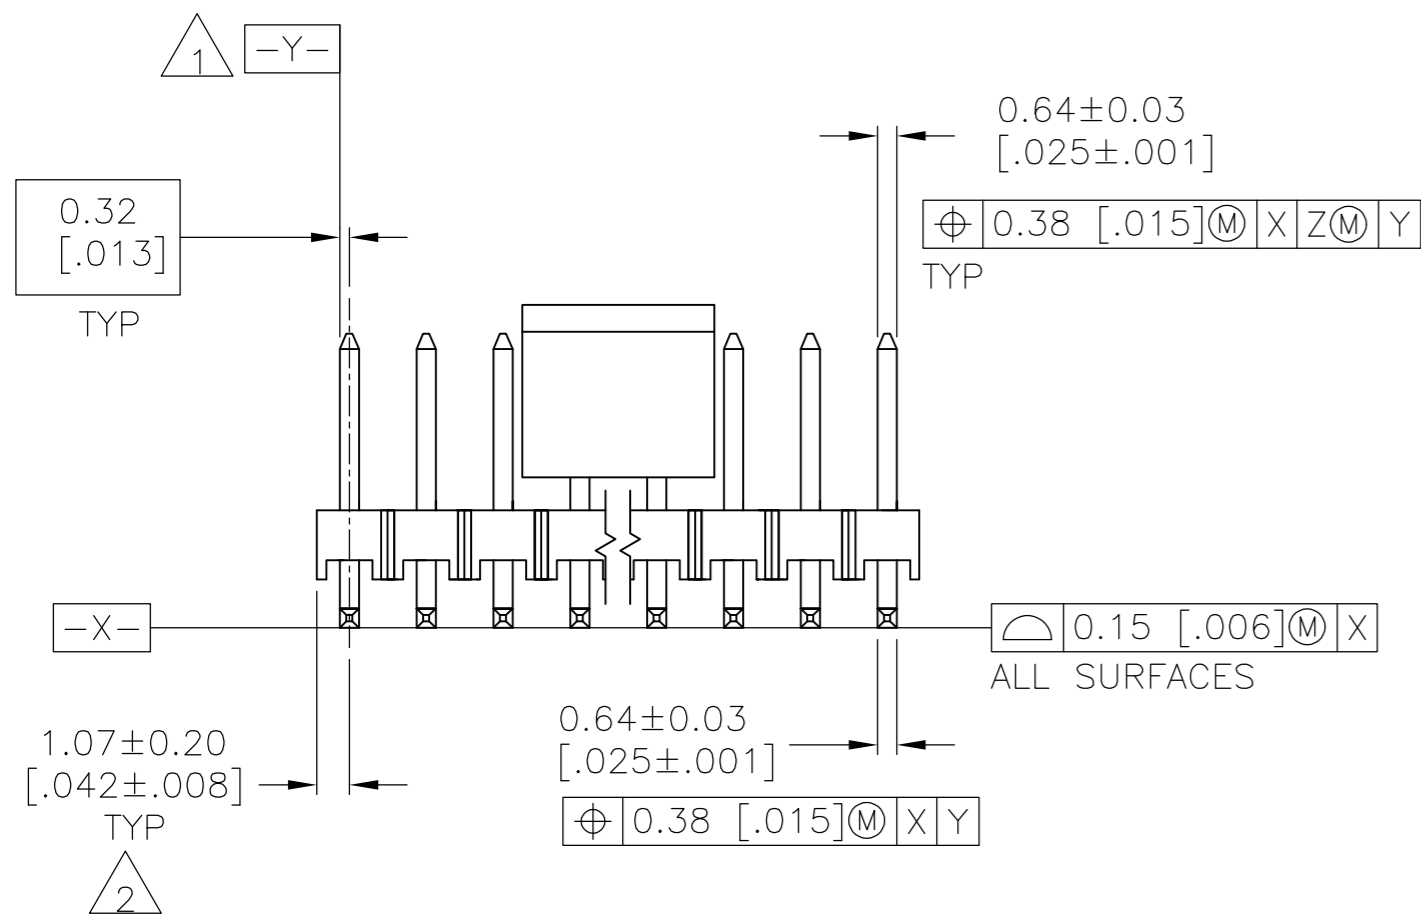


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD			
AD	00	R1	REVISED PER ECO-15-011938	24AUG2015	NK	MM		

- 1 -Y- SHALL BE THE INTERSECTION OF THE POST AND THE HOUSING.
- 2 THE NOTED DIMENSION APPLIES FROM THE BASIC DIMENSION (NOT THE POST CENTERLINE) TO THE SURFACE INDICATED.
- 3 0.000762[.000030] GOLD ON CONTACT AREA, 0.00254-0.00508[.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127[.000050] NICKEL.
- 4 PACKAGED IN TAPE AND REEL PER EIA-481 SPECIFICATIONS. SEE TABLE FOR TAPE WIDTH.
- 5 HOUSING: LCP, COLOR-BLACK. POST: COPPER ALLOY. PICK AND PLACE CAP: PPA COLOR-BLACK.

- 6 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 7 0.000762[.000030] GOLD ON CONTACT AREA, 0.00254-0.00508[.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127[.000050] NICKEL.
- 8 OBSOLETE
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

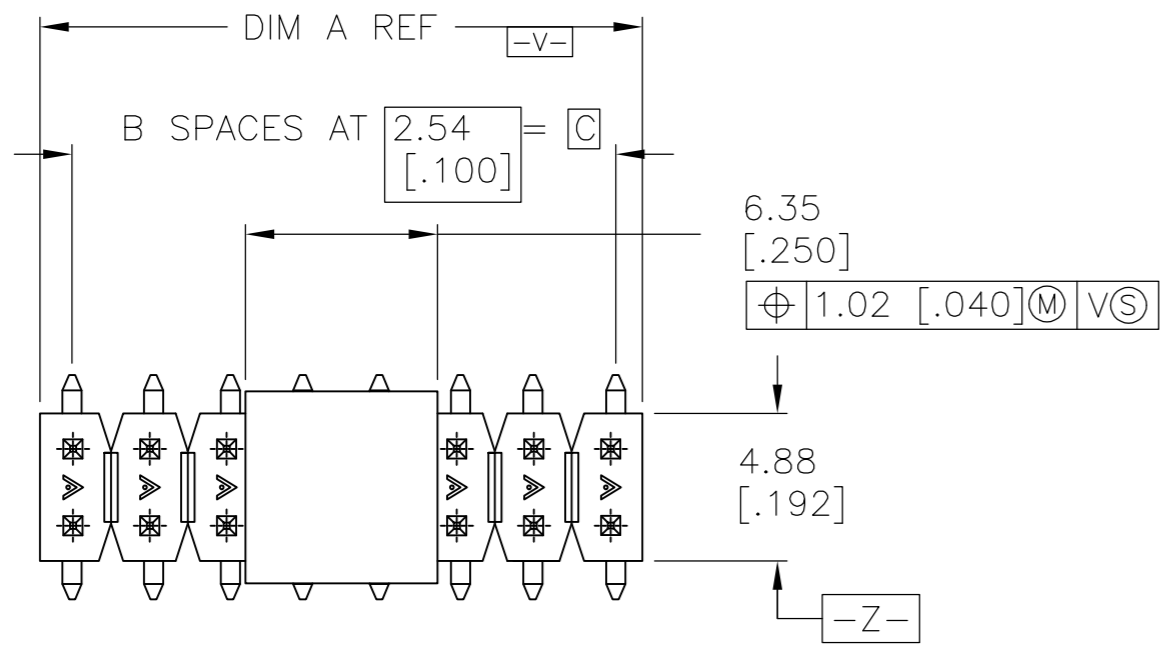

PLATING	TAPE WIDTH	C	B	A	NO. OF POSN	PART NUMBER	
6	7	-	30.48 [1.200]	14	32.61 [1.284]	30	6-147279-4
6	7	-	30.48 [1.200]	13	32.61 [1.284]	28	6-147279-3
6	7	-	30.48 [1.200]	10	32.61 [1.284]	22	6-147279-2
6	7	-	30.48 [1.200]	8	32.61 [1.284]	18	6-147279-1
7	44mm	30.48 [1.200]	12	32.61 [1.284]	26	6-147279-0	
7	44mm	17.78 [.700]	7	19.91 [.784]	16	5-147279-9	
9	24mm	12.7 [.500]	5	14.83 [.584]	12	5-147279-8	
7	24mm	7.62 [.300]	3	9.75 [.384]	8	5-147279-7	
9	44mm	27.94 [1.100]	11	30.07 [1.184]	24	5-147279-6	
7	44mm	22.86 [.900]	9	24.99 [.984]	20	5-147279-5	
7	24mm	2.54 [.100]	1	4.67 [.184]	4	5-147279-4	
7	32mm	15.24 [.600]	6	16.46 [.684]	14	5-147279-3	
7	24mm	10.16 [.400]	4	12.29 [.484]	10	5-147279-2	
7	24mm	5.08 [.200]	2	7.21 [.284]	6	5-147279-1	
8	24mm	5.08 [.200]	2	7.21 [.284]	6	1-147279-1	
9	44mm	30.48 [1.200]	12	32.61 [1.284]	26	1-147279-0	
3	44mm	17.78 [.700]	7	19.91 [.784]	16	147279-9	
9	24mm	12.7 [.500]	5	14.83 [.584]	12	147279-8	
3	24mm	7.62 [.300]	3	9.75 [.384]	8	147279-7	
3	44mm	27.94 [1.100]	11	30.07 [1.184]	24	147279-6	
3	44mm	22.86 [.900]	9	24.99 [.984]	20	147279-5	
3	24mm	2.54 [.100]	1	4.67 [.184]	4	147279-4	
3	32mm	15.24 [.600]	6	16.46 [.684]	14	147279-3	
3	24mm	10.16 [.400]	4	12.29 [.484]	10	147279-2	
3	24mm	5.08 [.200]	2	7.21 [.284]	6	147279-1	

9 SUPERCEDED BY 6-147279-0

RECOMMENDED PCB LAYOUT FOR USE WITH 0.20 [.008] THICK STENCIL

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	-
3 PLC	±	0.13 [.005]
4 PLC	±	-
ANGLES	±	-

MATERIAL: 5

FINISH: SEE TABLE

WEIGHT: -

CUSTOMER DRAWING

DWN: B. HAYMAKER 10JUL00

CHK: J. GESFORD 10JUL00

APVD: J. GESFORD 10JUL00

PRODUCT SPEC: -

APPLICATION SPEC: -

SCALE: 4:1

SHEET: 1 OF 1

REV: R1

TE Connectivity

NAME: SURF. MT. HDR. ASSY, MOD II, B/W, VERT, D/R, .100 x .100 C/L, .025 SQ POST, W/ PICK AND PLACE CAP

SIZE: A2

CAGE CODE: 00779

DRAWING NO: 147279

RESTRICTED TO: -

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [67230-005LF](#)