


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [87668-2004](#)
Status: **Active**
Overview: EXTreme PowerPlus™ (SSI)
Description: 6.35mm Pitch, Power, 2.54mm Pitch, Signal, EXTreme PowerPlus™ S-Pb Receptacle, Through Hole, Right Angle, Beveled Metal Pins, 0.76µm Gold (Au) Plating, 30 Circuits, Signal 24, Power Beta 6, No Void Pin, Lead-Free

Documents:

3D Model	Application Specification AS-87631-018 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-87631-006 (PDF)	Product Literature (PDF)

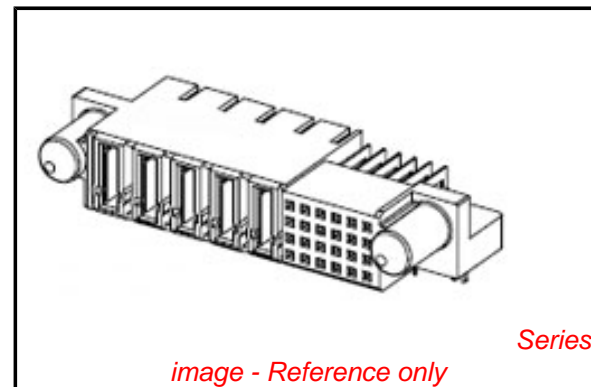

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Receptacles
Series	87668
Application	Board-to-Board, Power
Comments	Void Signal Pin: Nil
Overview	EXTreme PowerPlus™ (SSI)
Product Literature Order No	987650-3002
Product Name	EXTreme PowerPlus™
UPC	822348731640

Physical

(p)ower-(s)ignal Configuration	24s - 6p
Circuits (Loaded)	30
Circuits (maximum)	30
Color - Resin	Black
Durability (mating cycles max)	100
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Lock to Mating Part	Yes
Mated Height	12.57mm
Material - Metal	High Performance Alloy (HPA), Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	21.874/g
Number of Rows	4
Orientation	Right Angle
PC Tail Length	3.43mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm, 6.35mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-20°C to +105°C

EU RoHS

ELV and RoHS Compliant
REACH SVHC Contains SVHC: No
Low-Halogen Status Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

87668Series

Mates With

87667 EXTreme PowerPlus™ Right Angle S-Pb Header

Termination Interface: Style

Through Hole

Electrical

Current - Maximum per Contact

2.5A, 30A

Voltage - Maximum

50V DC

Solder Process Data

Duration at Max. Process Temperature (seconds)

0

Lead-free Process Capability

SMC & Wave Capable (TH only)

Max. Cycles at Max. Process Temperature

3

Process Temperature max. C

260

Material Info

Reference - Drawing Numbers

Application Specification

AS-87631-018

Product Specification

PS-87631-006

Sales Drawing

SD-87668-014

This document was generated on 07/10/2014

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heavy Duty Power Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[1424439](#) [1424438](#) [09330062652](#) [2-8675P1](#) [605601-1](#) [6340G1](#) [6341G1](#) [6360G1](#) [6373G1](#) [6374g2](#) [6396G1](#) [647757-1](#) [66394-4](#) [6643411-1](#)
[6646058-2](#) [6646137-1](#) [6646138-1](#) [6646348-1](#) [6646479-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#) [6651778-1](#)
[6651788-1](#) [696465-1](#) [696475-1](#) [73000005059](#) [73000005349](#) [73000005642](#) [73080255059](#) [73080965046](#) [765-15-0080A](#) [765-16-0080B](#)
[789.700-44](#) [789.700-54](#) [80-1010](#) [80-9](#) [827381-1](#) [829992-1](#) [902-77-02113](#) [PL00U-301-10D10](#) [PM103MOOLOO](#) [PM16S1620S32-50](#)
[PM212MOOLOO](#) [PM309FOOLOO](#) [PM324FOOLCH](#) [PMHPAF11S03](#)