SKKE 81



SEMIPACK [®]	
-----------------------	--

V _{RSM}	V_{RRM}	I _{FRMS} = 140 A (maximum value for continuous operation)	
V	V	I _{FAV} = 80 A (sin. 180; T _c = 87 °C)	
500	400	SKKE 81/04	
700	600	SKKE 81/06	
900	800	SKKE 81/08	
1300	1200	SKKE 81/12	
1500	1400	SKKE 81/14	
1700	1600	SKKE 81/16	
1900	1800	SKKE 81/18	
2100	2000	SKKE 81/20 H4	
2300	2200	SKKE 81/22 H4	

Rectifier Diode Modules

SKKE 81


Features


- Heat transfer through aluminium oxide ceramic isolated metal baseplate
- Hard soldered joints for high reliability
- UL recognized, file no. E 63 532


Typical Applications*

- Non-controllable rectifiers for AC/AC converters
- Line rectifiers for transistorized AC motor controllers
- Field supply for DC motors
- Free-wheeling diodes


Symbol	Conditions	Values	Units
I _{FAV}	sin. 180; T _c = 85 (100) °C	82 (57)	Α
I _D	P3/120; T _a = 45 °C; B2 / B6	63 / 70	Α
	P3/180F; T _a = 35 °C; B2 / B6	135 / 175	Α
I _{FSM}	$T_{v_i} = 25 ^{\circ}\text{C}; 10 \text{ms}$	2000	Α
	T _{vj} = 125 °C; 10 ms	1750	Α
i²t	$T_{vj} = 25 ^{\circ}\text{C}; 8,3 \dots 10 \text{ms}$	20000	A²s
	T_{vj} = 125 °C; 8,3 10 ms	15000	A²s
V_{F}	T _{vi} = 25 °C; I _F = 300 A	max. 1,55	V
V _(TO)	T _{vi} = 125 °C	max. 0,85	V
r _T	$T_{vj}^{'} = 125 ^{\circ}C$	max. 1,8	mΩ
I _{RD}	$T_{vj} = 125 ^{\circ}\text{C}; V_{RD} = V_{RRM}$	max. 4,5	mA
R _{th(j-c)}	per diode / per module	0,4 / 0,4	K/W
R _{th(c-s)}	per diode / per module	0,2 / 0,2	K/W
T _{vj} `´		- 40 + 125	°C
T _{stg}		- 40 + 125	°C
V _{isol}	a. c. 50 Hz; r.m.s.; 1 s / 1 min.	3600 / 3000	V~
V _{isol}	a. c. 50 Hz; r.m.s.; 1 s / 1 min. for SKKH4	4800 / 4000	V~
M _s	to heatsink	5 ± 15 %	Nm
M_t	to terminals	3 ± 15 %	Nm
а		5 * 9,81	m/s²
m	approx.	95	g
Case	SKKE	A 12	




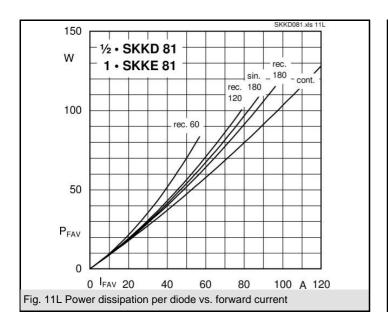


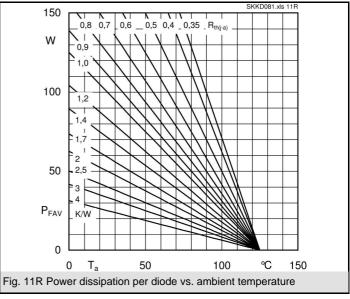



SKKE 81

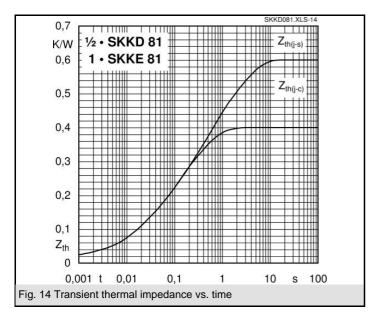

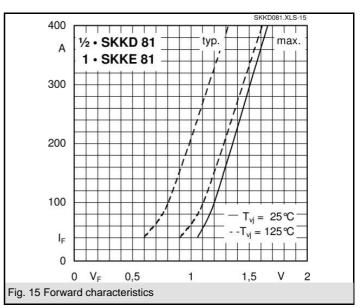

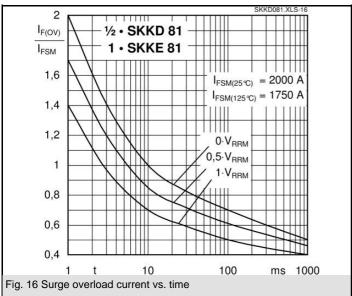

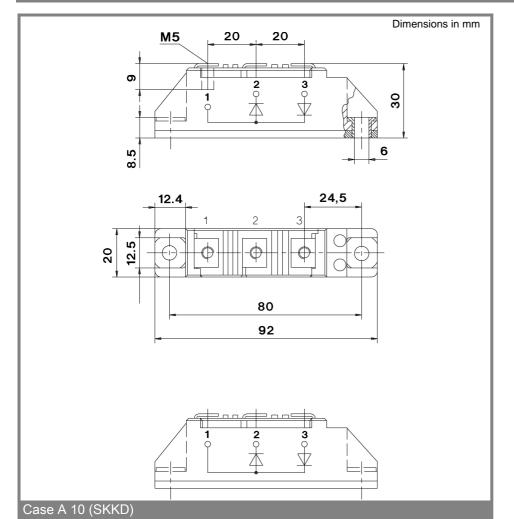



4 09-07-2009 SPO © by SEMIKRON

^{*} The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

X-ON Electronics

Authorized Distributor

Click to view similar products for Schottky Diodes & Rectifiers category.

Click to view products by Semikron manufacturer.

Other Similar products are found below:

D1FH35063 SEB40200 SR2100 MBR20150CT C3D1P7060Q MBR30100CTD

UJ3D1210KS UJ3D06508TS GB25MPS17247 MBRT120150R FST160100

SKKD8122H4 SKKD16220H4 ND171N14K MD100A18 DD61S14K DCG85X1200NA

DCG130X1200NA DCG100X1200NA CSRI2X25065 CSRI2X100120 SB3100

MBR3060220HF MBR2045220 MBR1060220