


Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

▶ Extract from the online catalog

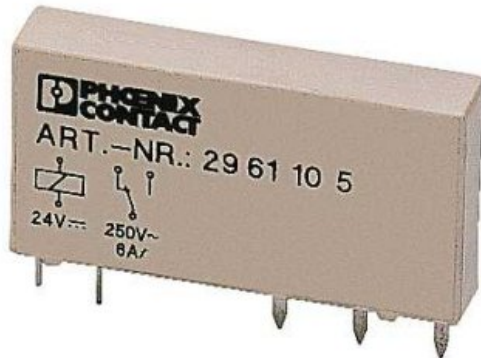

Pluggable miniature relays, with power contact, 1 PDT, input voltage 24 V DC

The illustration shows the version REL-MR- 24DC/21

Order No.	2961105
Ord designation	REL-MR- 24DC/21
EAN	4017918130893
Pack	10 Pcs.
Customs tariff	85364190
Weight/Piece	0,00665 KG
Catalog page information	Page 72 (IF-2005)

▶ Product notes

WEEE/RoHS-compliant since: 11/16/2005



IMPORTANT : This date is valid for Customers in Germany only. Date Format is MM/DD/YYYY. Please contact your local in-country Phoenix Contact location or designated business partner for a Logistics Compliant date in your area. In order to guarantee delivery of RoHS-Compliant product, please purchase Phoenix Contact parts from authorized Phoenix Contact representatives and distributors.

▶ Technical data

Coil side

REL-MR- 24DC/21



Nominal input voltage U_N	24 V DC
Nominal input current at U_N	7 mA
Typical response time	5 ms
Typical release time	2.5 ms
Coil resistance	$3390 \Omega \pm 10\%$ (at 20°C)

Contact side

Contact type	Single contact, 1 PDT
Contact material	AgSnO
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	12 V AC/DC
Maximum inrush current	(on request)
Min. switching current	10 mA
Limiting continuous current	6 A
Power rating (ohmic load) max.	140 W (for 24 V DC)
Power rating (ohmic load) max.	20 W (for 48 V DC)
Power rating (ohmic load) max.	18 W (for 60 V DC)
Power rating (ohmic load) max.	23 W (for 110 V DC)
Power rating (ohmic load) max.	40 W (for 220 V DC)
Power rating (ohmic load) max.	1500 VA (for 250 V AC)
Switching capacity min.	120 mW

General data

Length	28 mm
Height	15 mm
Width	5 mm
Test voltage relay winding/relay contact	4 kV AC (50 Hz, 1 min)
Ambient temperature (operation)	-40 °C ... 85 °C
Operating mode	100% operating factor
Service life mechanical	2 x 10 ⁷ cycles
Standards/regulations	IEC 60664
Standards/regulations	IEC 60664 A
Standards/regulations	DIN VDE 0110
Standards/regulations	DIN VDE 0106-101
Standards/regulations	DIN EN 50178/DIN VDE 0160 (in relevant parts)
Standards/regulations	IEC 60255/DIN VDE 0435 (in relevant parts)
Standards/regulations	EN 60730/DIN VDE 0631
Contamination class	3
Surge voltage category	III

Connection data

Type of connection	Plug / solder connection
--------------------	--------------------------

► Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057
USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>
Phoenix Contact
Technical modifications reserved;

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Phoenix Contact](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)