

SRPASSIVES

1 Electrical specifications	
1.1 Total Resistance	$1 \mathrm{K} \Omega \sim 500 \mathrm{K} \Omega \pm 20\%$
1.2 Resistance taper	A _N B
1.3 Voltage proof	1 Minute At 500V AC
1.4 Rotational noise	Less than 100mV
1.5 Tracking error	$0 \sim -40 dB \pm 3 dB$
1.6 Rated wattage	Curve B:0.125W Other than B: 0.063W
1.7 Max operating voltage	Curve B:200V AC Other curve B: 150V AC
1.8 Residual resistance	$R1,2<5\Omega; R2,3<10\Omega$
1.9 Insulation resistance	$\geqslant 100 M \Omega$ at DC500V
1.10Operating Temperature	-10 ~ 60 °C
2 Mechanical specifications	
2.1 Drawing	See the attachment
2.2 Total rotation angle	$300\pm5^{\circ}$
2.3 Rotation Torque	2~20mN.m (20~200gf.cm)
2.4 Shaft stop strength	>6Kgf.cm
2.5 Push pull strength	60N
2.6 Switch Rotational Angle	/
2.7 Switch Contant Resistance	/
2.8 Rotary life	10,000cycle

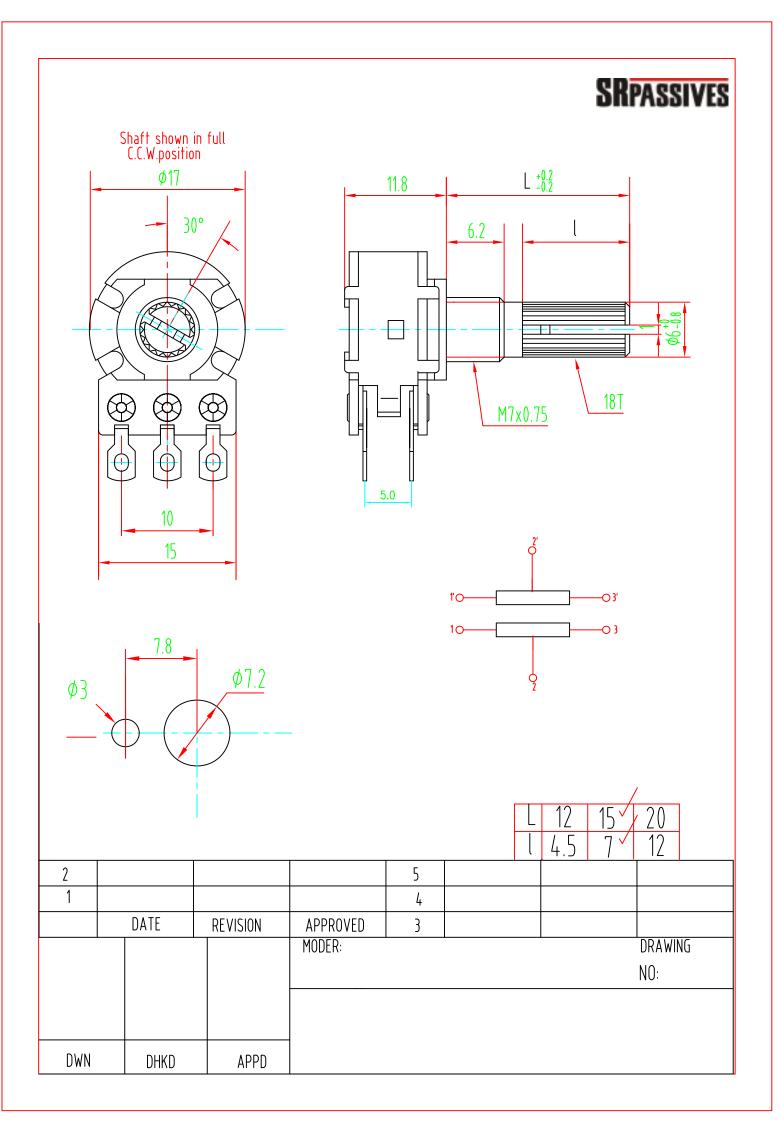

Resistance taper 電阻規律曲綫類型

Pattern of resistance curve

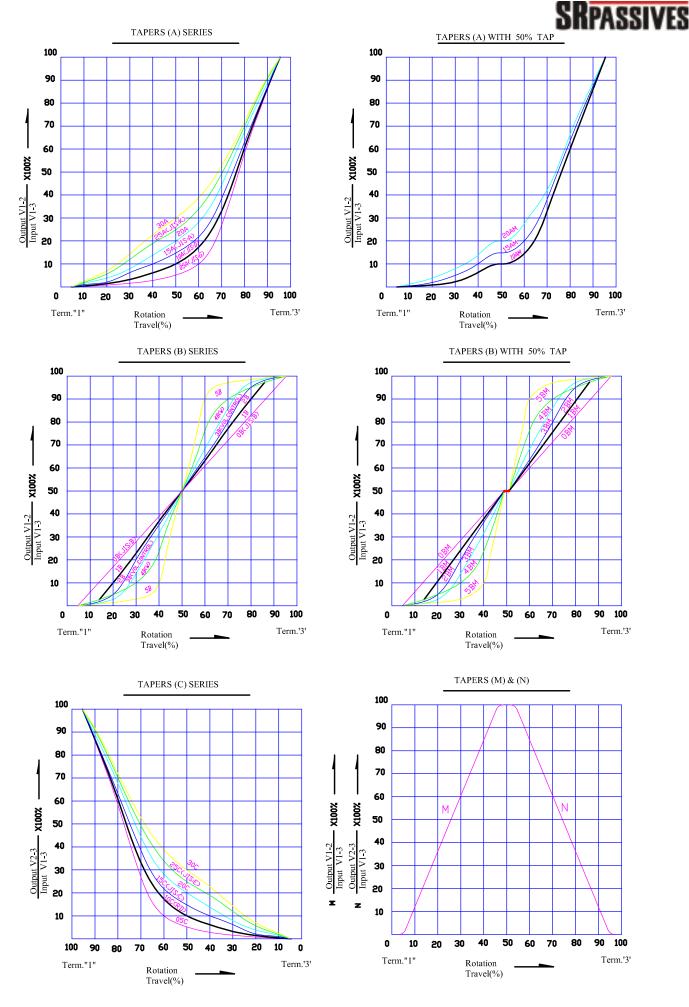

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Trimmer Resistors - Through Hole category:

Click to view products by SR Passives manufacturer:

Other Similar products are found below :

56PR250K
M63M102KB30T607
M63M103KB40
M63M501KB40
M63P102KB30T607
M63P105KB30T607
M63P202KB40

M63P203KB30T607
M63P203KB40
M63P205KB30T607
M63P501KB40
M63P502KB40
M63S102KB40
M63S103KB40
M63X101KB40

M63X103KB40
M63X104KB40
M63X501KB40
M63X503KB40
M70Y102KB25
76PR500K
79PR5K
P8PY103KB25
CT6P-103

M63M102KB40
M63M104KB40
M63M502KB40
M63P102KB40
M63P103KB30T640
M63P103KB40
M63P104KB30T607

M63P104KB40
M63P504KB40
M63S203KB40
M63S502KB40
M63X105KB40
M63X502KB40
M63S502KB40
M63X105KB40
M63X502KB40
M63X502KB40
M63X105KB40
M63X502KB40
M63X502KB40
M63X105KB40
M63X502KB40
M63X105KB40
M63X502KB40
M63X502KB40
M63X105KB40
M63X502KB40
M63X502K