



Photomicrosensor (Transmissive) EE-SX4134

■ Dimensions

Note: All units are in millimeters unless otherwise indicated.

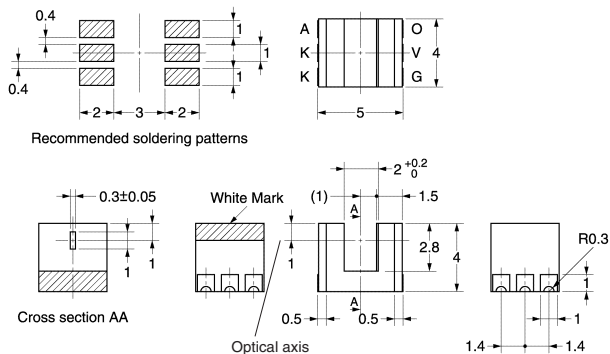

Unless otherwise specified, the tolerances are ±0.15 mm.

Terminal No.	Name
A	Anode
K	Cathode
V	Supply voltage (Vcc)
O	Output (OUT)
G	Ground (GND)

■ Features

- Ultra-compact model.
- Photo IC output model.
- Operates at a V_{CC} of 2.2 to 7 V.
- PCB surface mounting type.
- RoHS Compliant.

■ Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Rated value
Emitter	Forward current	I_F 25 mA (see note 1)
	Reverse voltage	V_R 5 V
Detector	Supply voltage	V_{CC} 9 V
	Output voltage	V_{OUT} 17 V
	Output current	I_{OUT} 8 mA
	Permissible output dissipation	P_{OUT} 80 mW (see note 1)
Ambient temperature	Operating	T_{opr} -25°C to 85°C
	Storage	T_{stg} -40°C to 90°C
	Reflow soldering	T_{sol} 255°C (see note 2)
	Manual soldering	T_{sol} 350°C (see note 2)

- Note: 1. Refer to the temperature rating chart if the ambient temperature exceeds 25°C.
 2. Complete soldering within 10 seconds for reflow soldering and within 3 seconds for manual soldering.


■ Ordering Information

Description	Model
Photomicrosensor (transmissive)	EE-SX4134


■ Electrical and Optical Characteristics (Ta = 25°C)

Item	Symbol	Value	Condition
Emitter	Forward voltage	V_F 1.2 V typ., 1.4 V max.	$I_F = 20$ mA
	Reverse current	I_R 0.01 μ A typ., 10 μ A max.	$V_R = 5$ V
	Peak emission wavelength	λ_P 940 nm typ.	$I_F = 20$ mA
Detector	Power supply voltage	V_{CC} 2.2 V min., 7 V max.	---
	Low-level output voltage	V_{OL} 0.12 V typ., 0.4 V max.	$V_{CC} = 2.2$ to 7 V, $I_{OL} = 8$ mA, $I_F = 7$ mA
	High-level output current	I_{OH} 10 μ A max.	$V_{CC} = 2.2$ to 7 V, $I_F = 0$ mA, $V_{OUT} = 17$ V
	Current consumption	I_{CC} 2.8 mA typ., 4 mA max.	$V_{CC} = 7$ V
	Peak spectral sensitivity wavelength	λ_P 870 nm typ.	$V_{CC} = 2.2$ to 7 V
LED current when output is ON	I_{FT} 2.0 mA typ., 3.5 mA max.	$V_{CC} = 2.2$ to 7 V	
Hysteresis	ΔH 21% typ.	$V_{CC} = 2.2$ to 7 V (see note 1)	
Response frequency	f 3 kHz min.	$V_{CC} = 2.2$ to 7 V, $I_F = 5$ mA, $I_{OL} = 8$ mA (see note 2)	
Response delay time	t_{PHL} 7 μ s typ.	$V_{CC} = 2.2$ to 7 V, $I_F = 5$ mA, $I_{OL} = 8$ mA (see note 3)	
Response delay time	t_{PLH} 18 μ s typ.	$V_{CC} = 2.2$ to 7 V, $I_F = 5$ mA, $I_{OL} = 8$ mA (see note 3)	

- Note:** 1. Hysteresis denotes the difference in forward LED current value, expressed in percentage, calculated from the respective forward LED currents when the photo IC is turned from ON to OFF and when the photo IC is turned from OFF to ON.
2. The value of the response frequency is measured by rotating the disk as shown below.

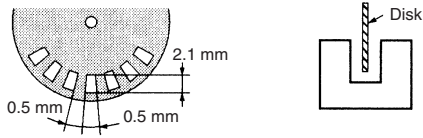


3. The following illustrations show the definition of response delay time.

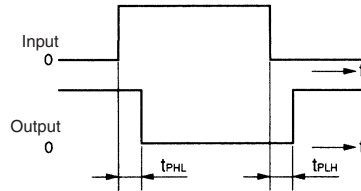


Engineering Data


Forward Current vs. Collector Dissipation Temperature Rating

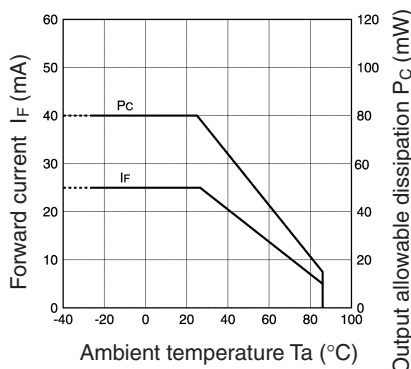


Forward Current vs. Forward Voltage Characteristics (Typical)

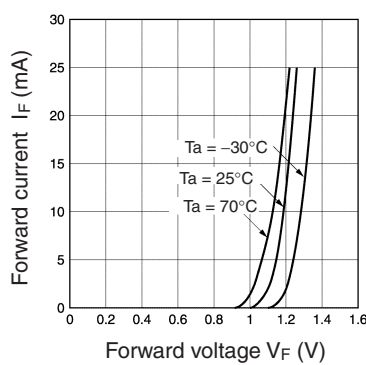


LED Current vs. Supply Voltage (Typical)

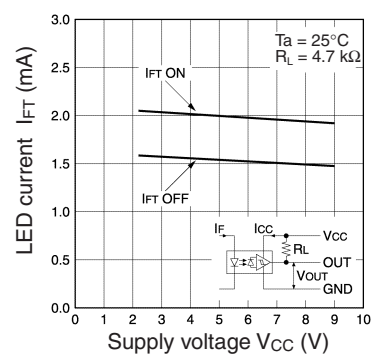


LED Current vs. Ambient Temperature Characteristics (Typical)

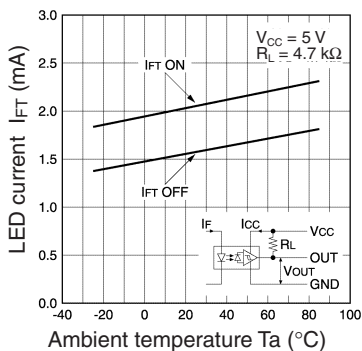


Low-level Output Voltage vs. Output Current (Typical)

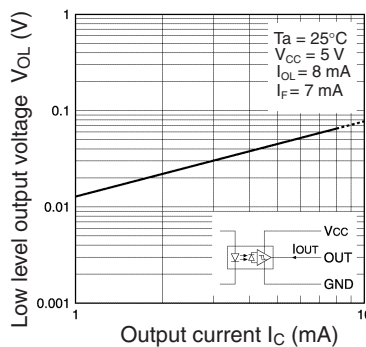


Low-level Output Voltage vs. Ambient Temperature Characteristics (Typical)

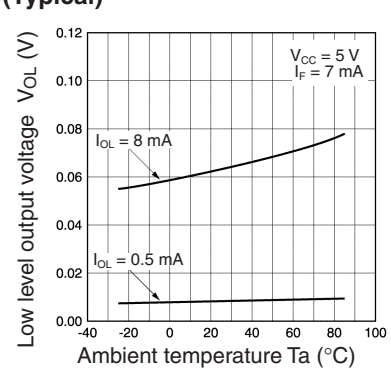


Current Consumption vs. Supply Voltage (Typical)

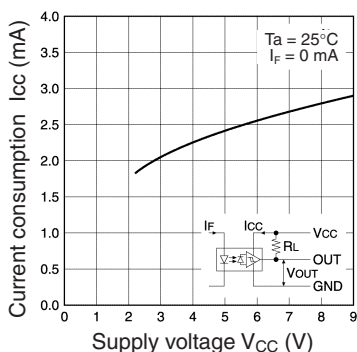

Response Delay Time vs. Forward Current (Typical)

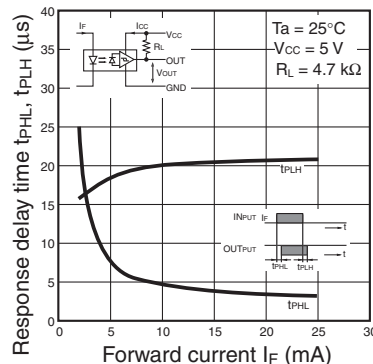


Repeat Sensing Position Characteristics (Typical)

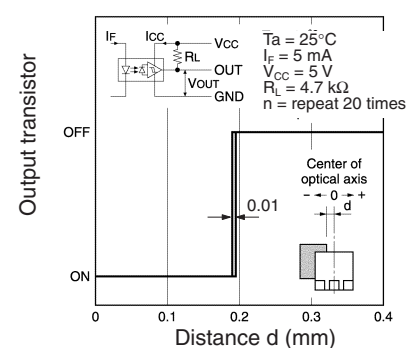


Unit: mm (inch)

■ Tape and Reel


Reel

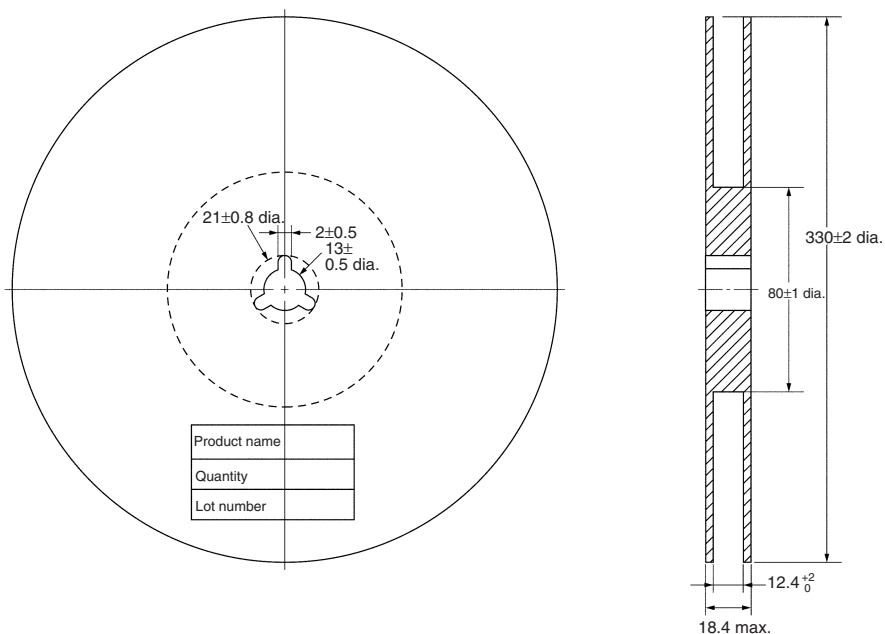

Tape

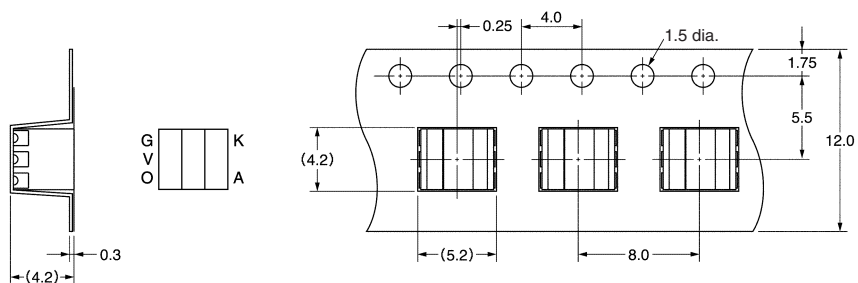

Tape configuration

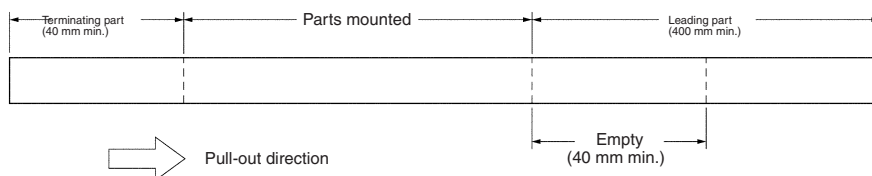

Tape quantity


2,000 pcs./reel

Precautions

■ Soldering Information

Reflow soldering

- The following soldering paste is recommended:
Melting temperature: 216 to 220°C
Composition: Sn 3.5 Ag 0.75 Cu
- The recommended thickness of the metal mask for screen printing is between 0.2 and 0.25 mm.
- Set the reflow oven so that the temperature profile shown in the following chart is obtained for the upper surface of the product being soldered.

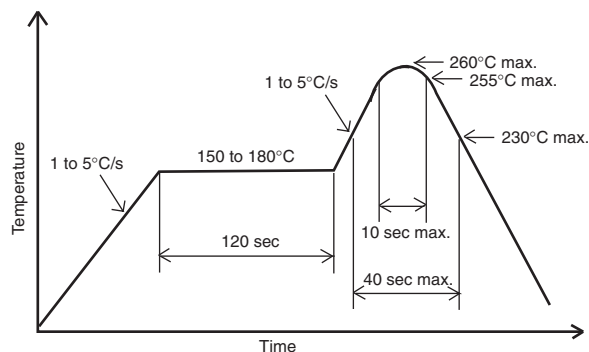

Manual soldering

- Use "Sn 60" (60% tin and 40% lead) or solder with silver content.
- Use a soldering iron of less than 25 W, and keep the temperature of the iron tip at 300°C or below.
- Solder each point for a maximum of three seconds.
- After soldering, allow the product to return to room temperature before handling it.

Storage

To protect the product from the effects of humidity until the package is opened, dry-box storage is recommended. If this is not possible, store the product under the following conditions:

Temperature: 10 to 30°C
Humidity: 60% max.

The product is packed in a humidity-proof envelope. Reflow soldering must be done within 48 hours after opening the envelope, during which time the product must be stored under 30°C at 80% maximum humidity.

If it is necessary to store the product after opening the envelope, use dry-box storage or reseal the envelope.

Baking

If a product has remained packed in a humidity-proof envelope for six months or more, or if more than 48 hours have lapsed since the envelope was opened, bake the product under the following conditions before use:

Reel: 60°C for 24 hours or more
Bulk: 80°C for 4 hours or more

A large grid of 20 columns and 30 rows of small squares, used for taking notes or drawing. The grid is composed of thin, light gray lines forming a uniform pattern across the page.

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON[®]

**OMRON ELECTRONIC
COMPONENTS LLC**

55 E. Commerce Drive, Suite B
Schaumburg, IL 60173

847-882-2288

OMRON ON-LINE

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Screws & Fasteners](#) category:

Click to view products by [Omron](#) manufacturer:

Other Similar products are found below :

[5721-1440-1/4-SS](#) [593503FX](#) [0098.0094](#) [0098.9206](#) [0098.9219](#) [0098.9221](#) [0098.9262](#) [596-2114-013](#) [59781-4](#) [59781-6](#) [0098.0026](#)
[0098.9210](#) [0098.9212](#) [60227-01](#) [60227-04](#) [60227-08](#) [60228-09](#) [618-00001](#) [62153-03](#) [62153-11](#) [M316-KSSTMCZ100](#) [M3440-SS](#) [M3442-SS](#) [M3448-SS](#) [6291A](#) [6292-1](#) [6-306105-9](#) [6-306131-4](#) [690432-1](#) [699161-000](#) [700989](#) [7-18023-1](#) [7-21002-8](#) [7230-3](#) [7235-3](#) [7248-1](#) [7248-2](#)
[73542-02](#) [CAPTIVE SHORT THUMBSCREW](#) [745564-1](#) [748174-2](#) [F03-02](#) [SUS316](#) [F1209](#) [751-00001](#) [80011](#) [809704-1](#) [8700](#) [8860220](#)
[9047](#) [95000002B](#) [9885-2](#)