

### Description

#### TDC10


- Fast Acting
- 1/4" x 1-1/4" physical size
- Glass tube, electroplated brass endcap construction
- Interrupting rating equals 10 times rated current
- Designed to British Standard BS2950A

#### TDC11


- Time Delay
- 1/4" x 1-1/4" physical size
- Glass tube, electroplated brass endcap construction
- Interrupting rating equals 10 times rated current

### Ordering

- Specify product code and packaging code

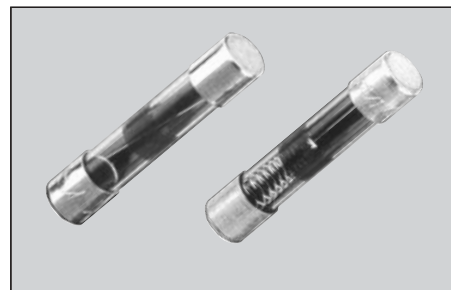

Dimensions <sup>mm</sup>/<sub>(inches)</sub>



### SPECIFICATIONS - TDC10

Product Code	Voltage Rating AC	Interrupting Rating*								Typical DC Cold Resistance (ohms)**	Minimum Melt I <sup>2</sup> t AC	Typical Voltage Drop (mV)
		1000V	750V	500V	350V	250V	150V	100V	32V			
TDC10-50MA	1000V	500MA	-	-	-	-	-	-	-	-	-	-
TDC10-60MA	1000V	600MA	-	-	-	-	-	-	-	-	-	-
TDC10-100MA	1000V	1A	-	-	-	-	-	-	-	-	-	-
TDC10-150MA	1000V	1.5A	-	-	-	-	-	-	-	-	-	-
TDC10-250MA	1000V	2.5A	-	-	-	-	-	-	-	-	-	-
TDC10-500MA	750V	-	5A	-	-	-	-	-	-	-	-	-
TDC10-750MA	500V	-	-	7.5A	-	-	-	-	-	-	-	-
TDC10-1A	350V	-	-	-	10A	-	-	-	-	-	-	-
TDC10-1.5A	250V	-	-	-	-	15A	-	-	-	-	-	-
TDC10-2A	250V	-	-	-	-	20A	-	-	-	-	-	-
TDC10-3A	250V	-	-	-	-	30A	-	-	-	-	-	-
TDC10-5A	250V	-	-	-	-	50A	-	-	-	-	-	-
TDC10-7A	150V	-	-	-	-	-	70A	-	-	-	-	-
TDC10-10A	100V	-	-	-	-	-	-	100A	-	-	-	-
TDC10-12A	32V	-	-	-	-	-	-	-	120A	-	-	-
TDC10-15A	32V	-	-	-	-	-	-	-	150A	-	-	-
TDC10-20A	32V	-	-	-	-	-	-	-	200A	-	-	-
TDC10-25A	32V	-	-	-	-	-	-	-	250A	-	-	-



### SPECIFICATIONS - TDC11

Product Code	Voltage Rating AC	Interrupting Rating*								Typical DC Cold Resistance (ohms)**	Minimum Melt I <sup>2</sup> t AC	Typical Voltage Drop (mV)
		1000V	750V	500V	350V	250V	150V	100V				
TDC11-50MA	1000V	500MA	-	-	-	-	-	-	-	-	-	-
TDC11-60MA	1000V	600MA	-	-	-	-	-	-	-	-	-	-
TDC11-100MA	1000V	1A	-	-	-	-	-	-	-	-	-	-
TDC11-150MA	1000V	1.5A	-	-	-	-	-	-	-	-	-	-
TDC11-250MA	1000V	2.5A	-	-	-	-	-	-	-	-	-	-
TDC11-500MA	750V	-	5A	-	-	-	-	-	-	-	-	-
TDC11-750MA	500V	-	-	7.5A	-	-	-	-	-	-	-	-
TDC11-1A	350V	-	-	-	10A	-	-	-	-	-	-	-
TDC11-1.5A	250V	-	-	-	-	15A	-	-	-	-	-	-
TDC11-2A	250V	-	-	-	-	20A	-	-	-	-	-	-
TDC11-3A	250V	-	-	-	-	30A	-	-	-	-	-	-
TDC11-5A	250V	-	-	-	-	50A	-	-	-	-	-	-
TDC11-7A	150V	-	-	-	-	-	70A	-	-	-	-	-
TDC11-10A	100V	-	-	-	-	-	-	100A	-	-	-	-

\* Interrupting Rating: Interrupting rating is 10 times the rated current.

\*\* DC Cold Resistance (Measured at <10% of rated current)

**TIME CURRENT CURVE**

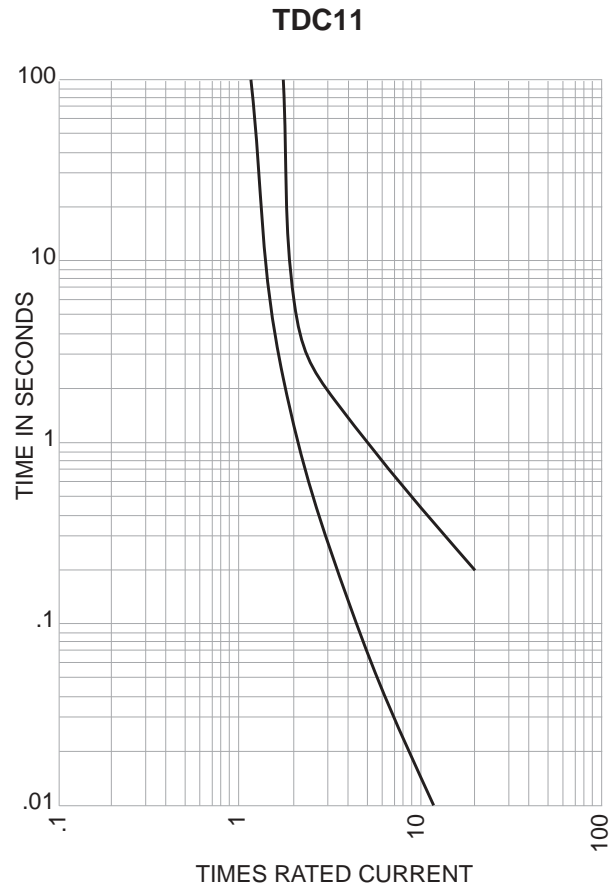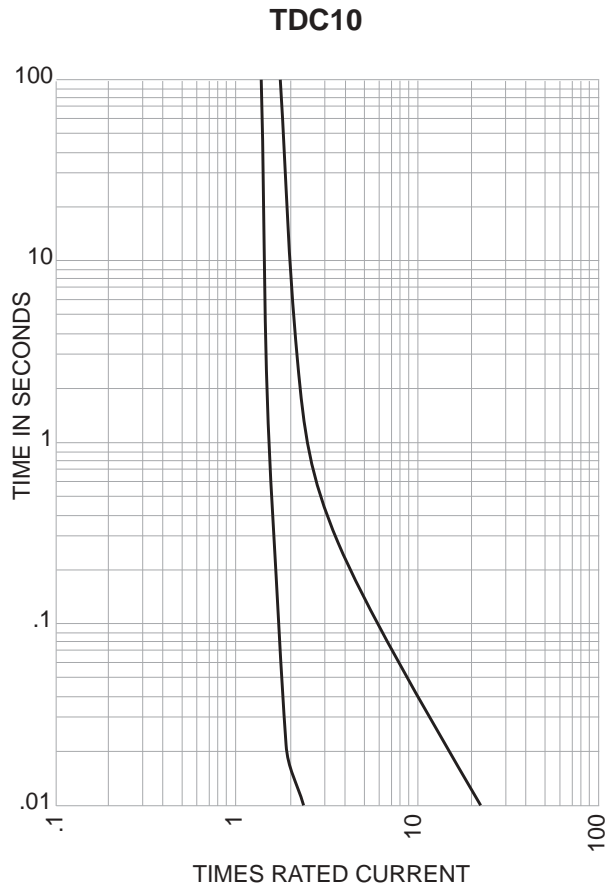

<b>PACKAGING CODE</b>	
<b>Packaging Code</b>	<b>Description</b>
<b>BK</b>	100 pieces of fuses packed into a cardboard carton with flaps folded
<b>BK1</b>	1,000 pieces of fuses packed into a cardboard carton with flaps folded

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [eaton](#) manufacturer:*

Other Similar products are found below :

[BK1-S506-500-R](#) [BK-MDL-3-R](#) [BK1-S506-6-3-R](#) [BK1-S506-2-R](#) [MPI4040R4-1R5-R](#) [TDC600-10A](#) [89096-015](#) [8946K153](#) [8961K155](#)  
[M22-D-R-GB0/K11](#) [M22-L-R/R](#) [M22S-ST-GB12](#) [630NHG3B](#) [63ET](#) [6422](#) [6580](#) [CTX20-16-52LP-R](#) [CWL530FI](#) [CXM/CO/GP/R/BB](#)  
[6HD36](#) [714125](#) [MBO-2](#) [ESR5-NO-41-24VAC-DC](#) [7314K36](#) [7321K2](#) [F02A-1-1/2A](#) [F02A-1-1/2AS](#) [F02A-1AS](#) [F02A-2AS](#) [F02A-3/4A](#)  
[F03A250V12A](#) [F03B125V4A](#) [MCR-4](#) [MDA-2-8/10-R](#) [MDA-30A](#) [MDA-V-1/16](#) [F60C500V10AS](#) [F60C500V15AS](#) [7563K84](#) [7634K36](#)  
[MDQ-3/16](#) [MDQ-7/10](#) [MDQ-V-1/10](#) [MDQ-V-1-1/4](#) [MDQ-V-1/16](#) [MDQ-V-1/2](#) [MDQ-V-1/4](#) [MDQ-V-3/16](#) [MDQ-V-3/8](#) [MDQ-V-6/10](#)