

1868ENH

Networking Cables

Datatwist® cable

CAT 5E F/UTP LSNH PATCH

2011-04-27 v8


Applications

- Work area patch cable
- Support current and future Category 5e applications, such as:
1000Base-T (Gigabit Ethernet), 100 Base-T, 10 Base-T, FDDI, ATM

General standards

- International standard: ISO/IEC 11801 2nd edition (2002) and ISO/IEC 11801 Amendment 2 (2010)
- European standard: EN 50173-1 (2002) and EN 50173-1 Amendment 1 (2009)
- U.S. Standards: ANSI/TIA/EIA 568-B.2-1 (2002)

Construction & Dimensions

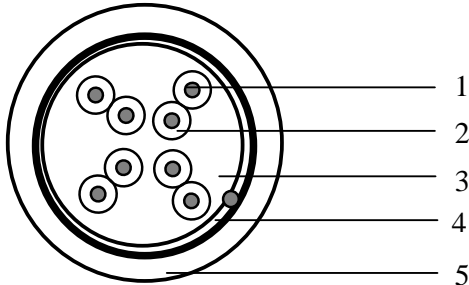

- | | |
|----------------------------------|---|
| 1. Conductor | |
| Material | Stranded bare copper ETP |
| Diameter | AWG 26 (7x AWG 34) |
| 2. Insulation | |
| Material | Polyethylene |
| Nominal diameter over insulation | 0.95 mm |
| 3. Cable core | |
| Pair | 2 twisted insulated conductors |
| Number of pairs | 4, all twisted together |
| Colour code pair 1 | Black / Blue & Blue |
| Colour code pair 2 | Black / Orange & Orange |
| Colour code pair 3 | Black / Green & Green |
| Colour code pair 4 | Black / Brown & Brown |
| 4. Foil shielding | |
| Material | Laminated Aluminium / Polyester |
| Position aluminium | Facing inside, in contact with drain wire |
| Drain wire material | Stranded tinned copper |
| Drain wire diameter | AWG 26 (7x AWG 34) |

5. Jacket

Material	LSNH
Diameter	5.4 ± 0.2 mm
Colour	Grey (RAL 7032) and blue (RAL 5015)
Standard text: (+ length indication per meter):	

BELDEN 1868ENH F/UTP CAT5e 4PR AWG26 ISO/IEC 11801 EN50173 100 OHM

Electrical characteristics

Reference standard: ISO/IEC 61156-6 edition 3.0 (2010)

Low frequency and D.C. (at 20°C)	Specification	Unit
D.C. resistance conductor	< 14.5	Ω/100m
Resistance unbalance: within a pair / between pairs	< 2 / < 4	%
Insulation resistance	≥ 5000	MΩ.km
Dielectric strength conductor-conductor and conductor-screen (2 sec.)	2.5	kV DC
Mutual capacitance	< 56	nF/km
Capacitance unbalance pair to ground	< 1600	pF/km
Nominal velocity of propagation (for information only)	> 0.6	c
Delay skew (differential delay)	≤ 40	ns/100m
Transfer impedance according IEC 61156-5	Grade 2	
Coupling attenuation according IEC 61156-5	Type II	

High frequency (at 20°), reference standard: ISO/IEC61156-5									
TYPE	1*	4	10	16	20	31.25	62.5	100	MHz
Attenuation	3.2	6.0	9.5	12.1	13.5	17.1	24.8	32.0	dB/100m
NEXT	65.3	56.3	50.3	47.2	45.8	42.9	38.4	35.3	dB/100m
PS NEXT	62.3	53.3	47.3	44.2	42.8	39.9	35.4	32.3	dB/100m
ACR	62.1	50.3	40.8	35.2	32.2	25.8	13.6	3.3	dB/100m
PS ACR	59.1	47.3	37.8	32.2	29.2	22.8	10.6	0.3	dB/100m
ACR-F	64.0	52.0	44.0	39.9	38.0	34.1	28.1	24.0	dB/100m
PS ACR-F	61.0	49.0	41.0	36.9	35.0	31.5	25.1	21.0	dB/100m
Return Loss	20.0	23.0	25.0	25.0	25.0	23.3	20.7	19.0	dB/100m
TCI level 1	40.0	34.0	30.0	28.0	27.0	25.1	22.0	20.0	dB/100m
EL TCTL	35.0	23.0	15.0	10.9	9.0	5.5			dB/100m
Impedance upper limit	122.2	115.2	111.9	111.9	111.9	114.6	120.2	125.3	Ω
Impedance lower limit	81.8	86.8	89.4	89.4	89.4	87.2	83.2	79.8	Ω
Propagation delay	570	552	545	543	540	539	538	537	ns/100m

NOTE: Limits below 4MHz are for information only

Mechanical characteristics

Low frequency and D.C. (at 20°C)	Specification	Unit
Elongation at break of the conductors	8	%
Minimum elongation at break of the insulation	≥ 100	%
Minimum elongation at break of the sheath	≥ 100	%
Tensile strength of sheath	< 9	MPa

Environmental and overall characteristics

Low frequency and D.C. (at 20°C)	Specification	Unit
Maximum operating voltage (for all temperatures cable is intended to be used)	72	V D.C.
Maximum continuous current per conductor (@25°C)	1.5	A
Temperature rating installation	0 / 50	°C
Temperature rating operation	- 30 / 60	°C
Total cable weight	31	kg/km
Minimum bending radius (during operation and installation)	21 / 42	mm
Maximum pulling strength	72	N
Burning load	395	kJ/m
Smoke density acc. to IEC 61034-1/2 & EN50268-1/2; transmittance	> 60	%
Amount of halogen acid gas acc. to IEC 60754-1/2 & EN50267-1/2; pH	> 4.3	
Amount of halogen acid gas acc. to IEC 60754-1/2 & EN50267-1/2; Conductivity	< 10	µS/m
Fire performance according IEC 60332-1	Pass	



Belden declares this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [belden](#) manufacturer:

Other Similar products are found below :

[HIPWP4LA](#) [HIPWP2LA](#) [49905A 060S2](#) [49907A 060S2](#) [9728 0601000](#) [8916-GRN/YEL-500](#) [8916-YEL-500](#) [8918-GRN/YEL-100](#) [8918-GRY-1000](#) [8919-DK-BLU-100](#) [8920-008-1000](#) [8920-BRN-1000](#) [8920-GRY-1000](#) [5T00UP 008500](#) [7810A-BLK-500](#) [7918A-BLK-1000](#) [7934A-BLK-1000](#) [7937A-BLK-1000](#) [8019-100](#) [8080](#) [8108-060-1000](#) [8125-CHR-100](#) [8132-CHR-1000](#) [8133-CHR-1000](#) [8155-CHR-1000](#) [8162-060-1000](#) [8162-CHR-1000](#) [8164-CHR-100](#) [8164-CHR-1000](#) [8185-CHR-100](#) [8205-CHR-1000](#) [8214-010-1000](#) [8221-BLK-1000](#) [8233-010-1000](#) [8233-BLK-1000](#) [8237-BLK-500](#) [8238-BLK-500](#) [8241-006-U1000](#) [8241A-BLK-1000](#) [8241F-RED-MATTE-1000](#) [8263-BLK-U1000](#) [8281-003-1000](#) [8281 010500](#) [83000 002100](#) [83002 0101000](#) [83003-006-500](#) [83003-VIO-500](#) [83004-RED-100](#) [83008 0091000](#) [83008-WHT-1000](#)