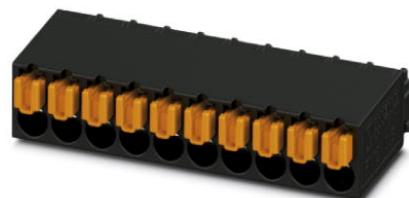


## FMC 0,5/ 3-ST-2,54


Order No.: 1821106

The figure shows a 10-position version of the product

<http://eshop.phoenixcontact.co.uk/phoenix/treeViewClick.do?UID=1821106>

Plug component, Nominal current: 6 A, Rated voltage (III/2): 160 V,  
Number of positions: 3, Pitch: 2.54 mm, Connection method: Spring-  
cage conn., Color: Black, Contact surface: Gold

### Commercial data

EAN	 4 046356 789165
Note	Made-to-order
Pack	200
Customs tariff	85366990
Gross weight in pieces	0.84 g
Country of Origin	DE
Catalog page information	Page 174 (CAT-1-2013)

### Product notes

WEEE/RoHS-compliant since:  
30/07/2012



Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

### Certificates

Certification

Certifications applied for:

Certification Ex:

### Accessories

Item	Designation	Description
<b>General</b>		
3202478	A 0,25- 7	Ferrule, Length: 7 mm, Color: silver
3009202	A 0,34- 7	Ferrule, Length: 7 mm, Color: silver
<b>Marking</b>		
0804853	SK 2,54/2,8:FORTL.ZAHLEN	Marker cards, Card, white, labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 99, Mounting type: Adhesive, For terminal block width: 2.54 mm
<b>Tools</b>		
1212034	CRIMPFOX 6	Crimping pliers, for ferrules as per DIN 46228 section 1+4, 0.25 - 6.0 mm <sup>2</sup> , insertion from the side, trapezoidal crimp
1205202	SZS 0,4X2,0	Micro screwdriver, bladed, size: 0.4 x 2.0 x 60 mm, 2-component grip, with non-slip grip and twist cap


### Additional products

Item	Designation	Description
<b>General</b>		
1821258	MC 0,5/ 3-G-2,54 P20 THR R24	Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 2.54 mm, Color: Black, Contact surface: Gold, Assembly: Taped SMD/THT/THR components
1821708	MC 0,5/ 3-G-2,54 SMD R24	Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 2.54 mm, Color: Black, Contact surface: Gold, Assembly: Taped SMD/THT/THR components
1821407	MCV 0,5/ 3-G-2,54 P20 THR R24	Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 2.54 mm, Color: Black, Contact surface: Gold, Assembly: Taped SMD/THT/THR components
1821559	MCV 0,5/ 3-G-2,54 SMD R24	Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 2.54 mm, Color: Black, Contact surface: Gold, Assembly: Taped SMD/THT/THR components

## Drawings

### Dimensioned drawing

---

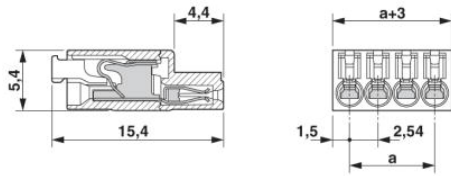

**Address**

PHOENIX CONTACT Ltd  
Halesfield 13  
Telford / Shropshire / TF7 4PG,England  
Phone 01952 681 700  
Fax 01952 681 799  
<http://www.phoenixcontact.co.uk>



Phoenix Contact Ltd.  
Technical modifications reserved;

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [Phoenix Contact](#) manufacturer:*

Other Similar products are found below :

[57.404.7553](#) [57.504.0053.7](#) [57.510.0053](#) [57.910.6153](#) [01.112.1453](#) [CTB932VE/6](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [734-304](#) [8-141-P](#) [FKCT 2.5/ 3-ST KMGY](#) [860505](#) [860508](#) [860516](#) [860810](#) [861908](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP02-5,00](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [H-10](#) [1546228-5](#) [ELFP03110](#) [ELVP03100](#) [ELXH03100](#) [ELXP041G0](#) [ELXT046G0](#) [1700101](#) [1700410](#) [1700425](#) [1703176](#) [1703243](#) [1705229](#) [1710175](#) [1714537](#) [1717806](#) [1719600](#) [1728941](#) [1729386](#) [1734692](#) [1734795](#) [1736036](#) [1740194](#) [1740291](#) [1740628](#)