


3153 00010044

(Home (/index.php?ci_id=3972&la_id=1) : Products (/products) : Sensors : Thermostats : 3153)

Distributor Inventory

Input part number for stock availability

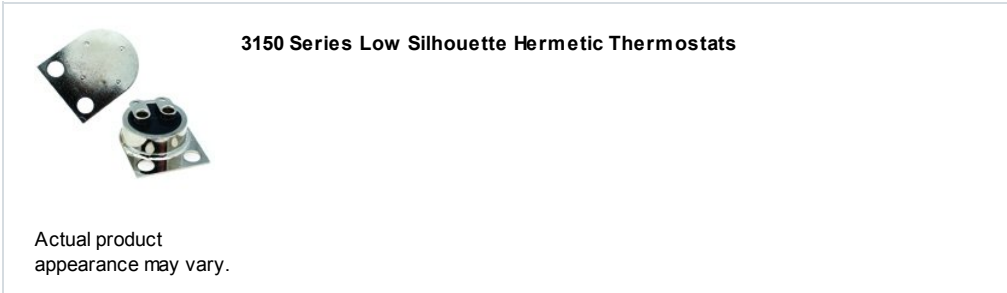

[Sales & Service](#)

[Distributor Inventory](#)

[Overview](#) [Specs](#) [Documentation](#) [Application Notes](#)

Product Specifications

Functional Properties	Open on rise
Reset Type	Automatic
Amperage	2.0 A resistive
Voltage	30 Vac/Vdc
Operating Temperature	-29 °C to 177 °C [-20 °F to 350 °F]
Environmental Exposure Range	-65 °C to 260 °C [-85 °F to 500 °F]
Open Temperature	15.6 °C [60 °F] max.
Close Temperature	4.4 °C [40 °F] min.
Dielectric Strength	MIL-STD-202, Method 301; 1250 Vac 60 Hz - Terminal to Case
Insulation Resistance	MIL-STD-202, Method 302; 500 MOhm
Contact Resistance	MIL-STD-202, Method 307; 0.050 Ohm max.
Hermetic Seal	MIL-STD-202, Method 112; Cond. C
Moisture Resistance	MIL-STD-202, Method 106
Shock	MIL-STD-202, Method 213; 100 G
Vibration	MIL-STD-202, Method 204; 20 G
Thermal Shock	MIL-STD-202, Method 107; Cond. B
Salt Spray	MIL-STD-202, Method 101; Cond. B
Housing Material	Steel housing hermetically sealed with glass-to-metal seal at terminal junction
Contact Material	Silver
Agency Approvals and Standards	Acceptance testing performed in accordance to Mil-PRF-24236, Table III
Mounting	No bracket
Series Name	3153

Narrow Your Search

Modify Your Search

Products

Technology

Industries Served

Product Search

Product Type:

New Products Only

Industry:

Entire Product Catalog

My Links

[eCOM Login \(/index.php?ci_id=50629&la_id=1\)](#)
[Request Access to eCOM \(/ecom access request\)](#)
[Rep/AD Portal Login \(/index.php?ci_id=50606&la_id=1\)](#)
[Rep/AD Portal Access Request \(/index.php?ci_id=50630&la_id=1\)](#)
[Sample Request \(/samplerequest\)](#)
[Digital U - HWL Learning Hub Login \(/index.php?ci_id=50607&la_id=1\)](#)
[Digital U - HWL Learning Hub Access Request \(/index.php?ci_id=146099&la_id=1\)](#)
[MicroSense \(/index.php?ci_id=50631&la_id=1\)](#)
[Supplier Microsite \(/index.php?ci_id=44887&la_id=1\)](#)

Literature and Media

[Data Sheets \(/white paper and technical data sheets library\)](#)
[Videos \(/videos\)](#)
[Literature \(/literature\)](#)
[Literature Request \(/index.php?ci_id=50636&la_id=1\)](#)
[White Papers \(/whitepapers\)](#)
[Application Notes \(/application notes\)](#)
[Application Demos \(/index.php?ci_id=141383&la_id=1\)](#)
[CAD Renderings \(/cad renderings\)](#)

Contacts

[Customer Service \(/index.php?ci_id=50608&la_id=1\)](#)
[Technical Support \(/index.php?ci_id=50609&la_id=1\)](#)
[Global Sales & Service \(/index.php?ci_id=50610&la_id=1\)](#)
[Website Feedback \(/index.php?ci_id=142628&la_id=1\)](#)



[\(/www.youtube.com/user/HONSensorSwitch\)](#)



[\(/twitter.com/HONSensorSwitch\)](#)

[Terms & Conditions \(/index.php?ci_id=2588&la_id=1\)](#)

[Privacy Statement \(/index.php?ci_id=2589&la_id=1\)](#)

[Site Map \(/sitemap\)](#)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thermostats](#) category:

Click to view products by [Honeywell](#) manufacturer:

Other Similar products are found below :

[66F060-0099](#) [66F060-0396](#) [66L085-0477](#) [67F080-0356](#) [67L060-0368](#) [67L080-0038](#) [77877-00](#) [ASP200-22](#) [22636-00](#) [2450 00210626](#) [2450 00880010](#) [2450RC 79080002](#) [2455R--01000844](#) [2455R 80580176](#) [2455R 80820955](#) [2455R 81610172](#) [2455R--90820376](#) [2455RA-94170955](#) [2455RC-00980620](#) [2455RCG81170352](#) [2455RM03090005](#) [2455RM 80820736](#) [2455RM-90980499](#) [2455RP-91000430](#) [2455RP-91000433](#) [2455RP-91000436](#) [2455RP-91000442](#) [300004530001](#) [300100140436](#) [300100630004](#) [3001 00830006](#) [2450G 83950014](#) [2450RC-90820307](#) [2455R--00030829](#) [2455R--01000140](#) [2455R 80820813](#) [2455R 80820815](#) [2455R 86890009](#) [2455R--99130436](#) [2455RA-04170929](#) [2455RBV00290011](#) [2455RC-01000545](#) [2455RM 80820767](#) [PN14-6R](#) [300000460015](#) [300005510124](#) [300100240048](#) [310000011390](#) [310000030602](#) [310000031798](#)