![molex® one company › a world of innovation]

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **22-02-2115**

Status: **Active**

Overview: KK® Interconnect System - Molex

Description: KK® 254 PC Board Connector, Top Entry, 2.54µm Tin (Sn), 11 Circuits, with Hooks

Documents:
3D Model
Drawing (PDF)

Product Specification PS-10-07 (PDF)
RoHS Certificate of Compliance (PDF)

image - Reference only

Series

Agency Certification
CSA	LR19980
UL	E29179

General
Product Family	PCB Receptacles
Series	4455
Application	Board-to-Board, Signal
Comments	With Hooks
Overview	KK® Interconnect System - Molex
Product Name	KK® 254
UPC	800754207171

Physical
Circuits (Loaded)	11
Circuits (maximum)	11
Color - Resin	Natural (White)
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	No
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Nylon
Net Weight	1.153/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	3.35mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	2.540µm
Plating min - Termination	2.540µm
Polarized to PCB	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	See Product Specification
Termination Interface: Style	Through Hole

Electrical
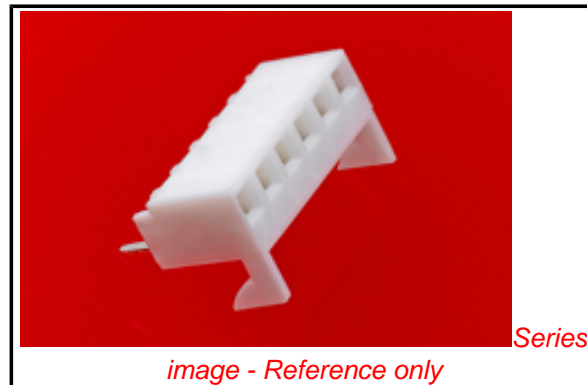|	
Current - Maximum per Contact	2.5A
Grounding to PCB	No
Voltage - Maximum	250V

EU RoHS

ELV and RoHS Compliant

REACH SVHC
Not Reviewed

Low-Halogen Status
Low-Halogen

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.

Search Parts in this Series
4455Series

Mates With
42153 KK® Wire-to-Board, 4094 KK® Wire-to-Board, 42376 KK® Header, 42375 KK® Header, 42377 KK® Header, 70021 SL™ Crimp Terminal, 70475 SL™ Insulation Displacement Connector Assembly, 42152 KK® Wire-to-Board Header

Solder Process Data

Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	235

Material Info

Old Part Number	A-4455-CZ11A(P909)

Reference - Drawing Numbers

Product Specification	PS-10-07
Sales Drawing	SDA-4455

This document was generated on 03/27/2015
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Headers & Wire Housings *category:*

Click to view products by Molex *manufacturer:*

Other Similar products are found below :

95000-104TRLF 10135584-644402LF DF62W-EP2022PCA 95000-106TRLF DF62W-2022SCA DF62W-EP2022PC 2203348 DF62W-2022SC 1084018 1029039 1084017 802-10-012-10-002000 1112640 1112639 000-34000 0009482033 0009507031 57102-S06-03LF 57202-S52-04LF PCN6-15S-2.5E 0039019024 58102-G61-06LF 582553-1 0009485154 0009508121 0022285053 0050291907 018731A LY20-4P-DT1-P1E-BR 02.125.8002.8 60101931 60598-1 (Cut Strip) M1625-3R/100 61062-3 61082-181009 636-1427 638009-1 641938-9 641991-4 644168-1 647662-1 65039-019ELF 65817-002LF 65817-015LF 65863-015LF 66207-023LF 67016-026LF 67046-001LF 67095-007LF 67230-005LF