


.033" Round Conductor Flat Cable

30 AWG Stranded, PVC

3849 Series

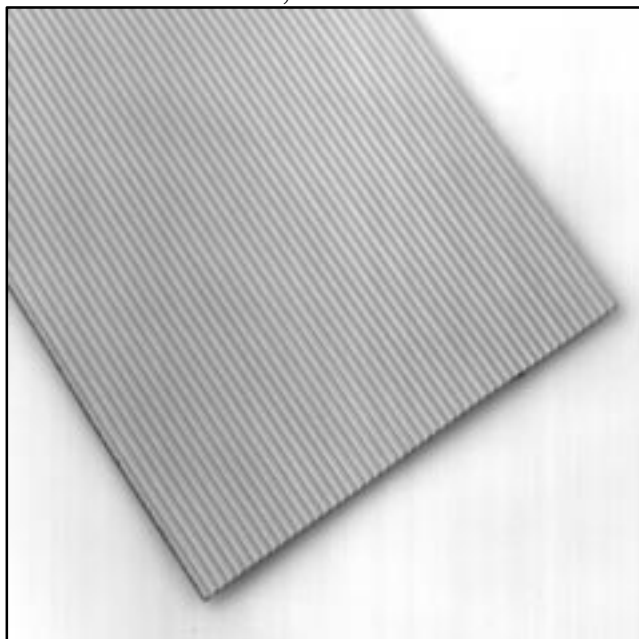

- 30 AWG stranded wire on .0333 inch centers permits termination to all three rows in DIN connectors.
- Stranded wire provides flexibility and extended product life.
- Zippable for branching or discrete termination

Date Modified: February 19, 1999

TS-0573-06
Sheet 1 of 2

124



Physical

Insulation

Material: Polyvinyl Chloride (PVC)
Color: Gray

Marking

Standard: None

CSA Option:  AWM 2651 105C 300V VW1 3M NU  AWM IA 105C 300V FT1
EU <50V

Conductors: 30 AWG 7 X 38 [7 X 0.102] Tinned Stranded Copper

Electrical

Voltage Rating:	USA: 300V	Canada: 300V	EU: <50V
Insulation Resistance:	> 1 X 10 ¹⁰ Ω/10 ft. [3m]		
	Unbalanced	Balanced	
Characteristic Impedance:	89 Ω	144 Ω	
Capacitance:	17.5 pF/ft. [57.4 pF/m]	10.5 pF/ft (34.5 pF/m)	
Inductance:	.14 μH/ft. [0.46 μH/m]	.22 μH/ft (0.72 μH/m)	
Propagation Delay:	1.56 ns/ft. [5.12 ns/m]	1.51 ns/ft (4.95 ns/m)	
Velocity of Propagation:	65%	67%	

Note: Unbalanced is measured between ground-signal-ground conductors. Balanced is measured between signal conductors within a pair.

Environmental

Temperature Rating: -20°C to +105°C
Flammability Rating: USA: VW-1 Canada: FT1

UL File No.: E42769, Style No.: 2651

3M Interconnect Solutions Division

6801 River Place Blvd.
Austin, TX 78726-9000


For technical, sales or ordering information call
800-225-5373

.033" Round Conductor Flat Cable

30 AWG Stranded, PVC

3849 Series

Number of Conductors	3M Part Number	Dimension A	Dimension B
96	3849/96	3.197 ± .020 [81.20]	3.164 ± .015 [80.37]

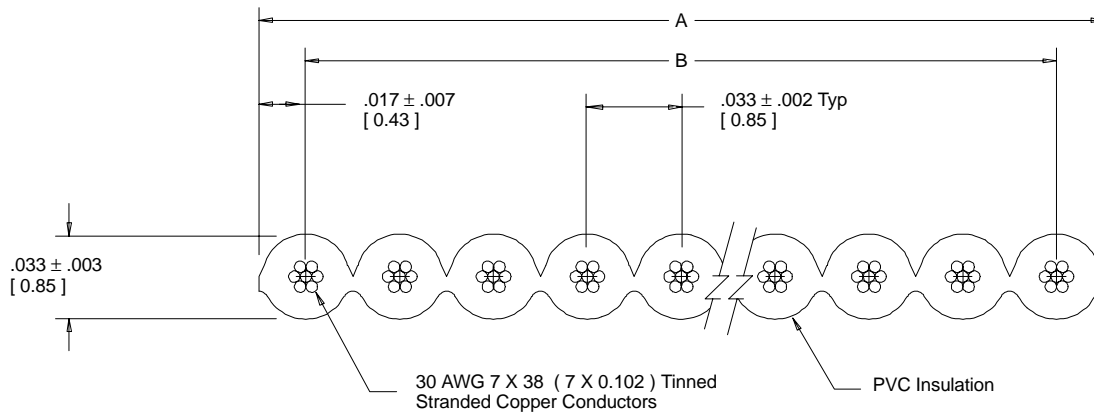


Inch
[mm]

Tolerance Unless Noted			
	.0	.00	.000
Inch	±.1	±.01	±.005

Note: Red marking on one edge of cable designates wire #1.

[] Dimensions for Reference only

Ordering Information

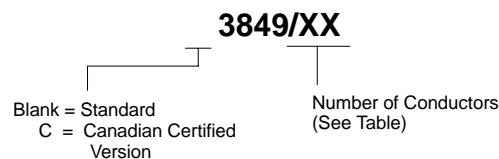

Note: Standard length is 100 ft/roll.

TS-0573-06
Sheet 2 of 2

3M Interconnect Solutions Division

6801 River Place Blvd.
Austin, TX 78726-9000

For technical, sales or ordering information call
800-225-5373

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [3m manufacturer](#):

Other Similar products are found below :

[SC401U](#) [98-0003-3071-6](#) [00-054007-70220-7](#) [00-054007-34717-0](#) [021200-40230](#) [6840-2X50-GRAY](#) [D2550-6002-AR](#) [701-W](#) [7993MP-2CIRCLE-100](#) [FDV14-187C](#) [8124/14](#) [812510-100](#) [8125/17](#) [813216](#) [8204-3LFM](#) [8425-8](#) [MNG14BCX](#) [FP301-1-6"-Clear](#) [FV14-6C](#) [920102-01-25-R](#) [923835-BK-C](#) [927739-40](#) [929835-01-28-RK](#) [929836-09-16](#) [929974-01-40-R](#) [951240-2520-AR-PR](#) [960X/980X](#) [98-0003-3075-7](#) [HF36564-100](#) [HF625/26-30](#) [1/2-5-5430](#) [1/2-5-850S](#) [1/2-5-3431](#) [12X12-6-4056B](#) [12X12-6-433](#) [12X12-6-4930](#) [13-500-NB](#) [14526-EZ5B-300-02C](#) [1-4-4658F](#) [14520-EZAB-300-0EC](#) [DSTK9013-3420](#) [DSTK9015-3402](#) [14T50-SZWB-100-0NC](#) [152244-0110-GB](#) [1-5-3437](#) [1-5-4496W](#) [1-5-4943F](#) [1-5-363](#) [1-5-5451](#) [1-5-421](#)