


TYPE D104C

Frequency Range: 0.1 ~ 1MHz

Inductance Range: 1.0 - 47 μ H

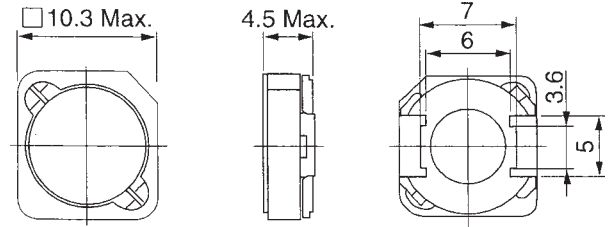


Unit: mm

Features

- Low profile (4.5mm max.)
- Magnetically shielded
- Available on tape and reel for auto-insertion
- Suitable for reflow soldering
- Lead-free terminations

Recommended patterns:

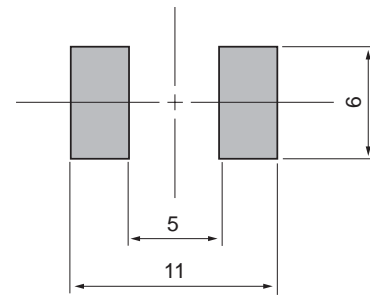

Unit: mm

STANDARD PARTS SELECTION GUIDE

- (1) Inductance is measured by LCR-meter 4284A (HP) or equivalent.
- (2) DC Resistance is measured by Digital Multimeter TR6871 (Advantest) or equivalent.
- (3) Maximum allowable DC current is that which causes a 10% inductance reduction from the initial value, or coil temperature to rise by 40°C, whichever is smaller. (Reference ambient temperature 20°C).

TYPE D104C

TOKO Part Number	Inductance (μ H)	Tolerance (%)	Inductance [A] ⁽³⁾ Decrease Current (A) max.	Temperature [B] ⁽³⁾ Rise Current (A) max.	DC ⁽²⁾ Resistance (m Ω) max.
#919AS-1R0N=P3	1.0	\pm 30%	13.6	9.7	5.9
#919AS-1R8N=P3	1.8	\pm 30%	10.4	9.5	7.6
#919AS-2R8M=P3	2.8	\pm 20%	8.3	6.1	10.7
#919AS-3R7M=P3	3.7	\pm 20%	7.0	5.3	14.2
#919AS-4R7M=P3	4.7	\pm 20%	6.1	5.2	16.2
#919AS-6R4M=P3	6.4	\pm 20%	5.2	4.8	22.9
#919AS-100M=P3	10	\pm 20%	4.3	4.5	26.5
#919AS-160M=P3	16	\pm 20%	3.3	3.7	49.2
#919AS-220M=P3	22	\pm 20%	3.0	2.5	77.6
#919AS-270M=P3	27	\pm 20%	2.7	2.4	88.3
#919AS-330M=P3	33	\pm 20%	2.4	2.1	102
#919AS-470M=P3	47	\pm 20%	1.8	1.8	150

Note: =P3 is added to each part number to indicate tape and reel packaging.

[A] : 10% inductance reduction from the initial value.

[B] : Coil temperature to rise by 40°C.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [murata](#) manufacturer:

Other Similar products are found below :

[GRM188R71E473KA01D](#) [GRM21BR61H225KA73L](#) [786028C](#) [MGJ1D121905MPC-R7](#) [MGJ2D051515SC](#) [82103C](#) [82224C](#) [82473C](#)
[GCM32EC71H106MA03L](#) [GRM2165C1H101FA01D](#) [PTGL09AS2R2K3B51B0](#) [11R683C](#) [DD1274AS-H-220M=P3](#) [DFE252012P-1R0M=P2](#)
[BPM15-120-Q12P-C](#) [NMK1212SC](#) [NMV1212DAC](#) [LQH43MN330J03L](#) [GRM1885C1H150FA01J](#) [GRM3195C2A471JD01D](#) [RF1211C](#)
[MGJ2D121509SC](#) [MGJ6D122005LMC-R7](#) [#B953AS-330M=P3](#) [BLM18AG601SN1J](#) [HN-214](#) [HN-214X](#) [TZ03P450](#) [UEE-12/12.5-D48NB-C](#)
[LBWB1ZZYDZ-DTEMP-SNIC-UART-A](#) [LLM315R70J225MA11L](#) [46334C](#) [DR4103](#) [SCA830-D07-PCB](#) [NKE1212DC](#) [NMA1215SC](#)
[UVQ-48/2.5-D24PB-C](#) [RDE5C1H472J1M1H03A](#) [IML-0642](#) [HPR105C](#) [HPQ-12/25-D48PB-C](#) [UWS-5/10-Q48N-C](#) [19R683C](#) [UHE-152000-D24-C](#) [782485/35C](#) [UEI-3.3/15-Q12PR-C](#) [MGJ2D122005SC](#) [MEV1S0505SC](#) [MEMS-EVAL-BOARD](#) [MEJ2D0512SC](#)