


High-precision female headers soldering technique / **MK 01**



for $\varnothing 0.5$ mm

Parameters of article MK 01

version	for multi-layer
no. of contacts	1 - 50
surface	gold-plated / tin-plated
angle	straight
number of rows	1
connection type	soldering
grid	2.54
plug-in cross-section	$\varnothing 0.5$
soldering	yes
Reflow solderable	yes

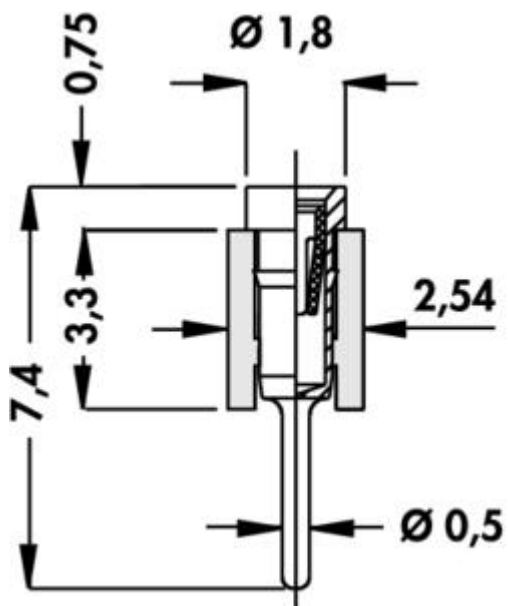

Technical data PCB connectors

	MK
Contact material: shell	CuZn-alloy
Contact surface of the shell: gold/tin	Ni + 0,2 µm Au Ni + 5 µm Sn
Contact spring: material/surface	CuBe-alloy / Ni + 0,75 µm Au
Transition resistance:	≤ 10 mOhm
Shock resistance:	50 g
Vibration resistance max.:	15 g
Capacity between two adjacent contacts:	≤ 0,4 pF
Current rating:	1,5 A
Nominal voltage:	60 V DC
Test voltage:	1000 V
Insulator: material	PA 4.6, GF
Temperature range:	-40 °C ... +163 °C (+260 °C 1 min)
Flammability class:	UL 94 V-0
Insulation resistance:	> 10 ¹² Ohm
Plugability for pins:	0,22 x 0,25 mm to 0,40 x 0,55 mm, Ø 0,4... 0,56 mm
Insertion depth for pins:	2,5 ... 3,6 mm
Insertion/Extraction, type:	4-clip cont., 1,8 N/1,4 N

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [Fisher](#) manufacturer:

Other Similar products are found below :

[HFW11R-1STE1H1LF](#) [FH29B-100S-0.2SHW\(99\)](#) [FA5S008HP1](#) [FH29B-120S-0.2SHW\(99\)](#) [FH29B-80S-0.2SHW\(99\)](#) [FHS-16](#) [FPH-2022G](#)
[52610-1075](#) [52610-1275](#) [52610-1934](#) [XF3M\(1\)-1415-1B-R100](#) [501864-3091-TR225](#) [0525594033](#) [086210010340800](#) [086222026001800](#)
[52271-2869-CUT-TAPE](#) [62674-201121DLF](#) [62684-36210E9ALF](#) [52610-1675](#) [52746-1671-TR250](#) [10051922-2810EHLF](#) [6-520415-9](#)
[BD021-09A-A1-0350-0200-0550-LD](#) [SFV6R-1STE9HLF](#) [XF3M-2915-1B-R100](#) [1658549-1](#) [62674-221121ALF](#) [46214008010800](#)
[046298003000883](#) [151660622](#) [842-816-2630-035](#) [AYF530665TA](#) [AYF351525](#) [046296011930846+](#) [AYF352325A](#) [046254020000800+](#)
[FH19C-13S-0.5SH\(99\)](#) [FH39J-51S-0.3SHW\(99\)](#) [AYF355125A](#) [AYF530365TA](#) [FH29B-44S-0.2SHW\(99\)](#) [SFW5R-2STAE9LF](#) [AYF351125A](#)
[AYF350725A](#) [62684-502100AHLF](#) [FH39-61S-0.3SHW\(99\)](#) [AYF414035A](#) [10064555-172520HLF](#) [AYF212335A](#) [504754-2500](#)