



**Capable of 2.4A to 3.5A
high capacity load
current control**

**PhotoMOS®
HE 1 Form A
High Capacity (AQV250G3)**

New



mm inch



RoHS compliant

FEATURES

- Greatly increased load current in a compact DIP package**
Continuous load current: 3.5A (AQV252G3)
- Greatly improved specifications allow you to use this in place of mercury and mechanical relays.**
- Low on-resistance (Typ. 33mΩ, AQV252G3)**

TYPICAL APPLICATIONS

- Security equipment
- Fire-preventing system
- Industrial machine
- Thermostat (HVAC temperature controller)

TYPES

	Output rating*		Package	Part No.				Packing quantity	
				Through hole terminal	Surface-mount terminal			Tube	Tape and reel
	Load voltage	Load current			Tube packing style	Tape and reel packing style			
AC/DC dual use	60 V	3.5 A	DIP6-pin	AQV252G3	AQV252G3A	AQV252G3AX	AQV252G3AZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.	1,000 pcs.
	100 V	2.4 A	DIP6-pin	AQV255G3	AQV255G3A	AQV255G3AX	AQV255G3AZ		

*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	Type of connection	AQV252G3(A)	AQV255G3(A)	Remarks
Input	LED forward current	I_F		50 mA		
	LED reverse voltage	V_R		5 V		
	Peak forward current	I_{FP}		1 A		f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P_{in}		75 mW		
Output	Load voltage (peak AC)	V_L		60 V	100 V	
	Continuous load current	I_L	A	3.5 A	2.4 A	A connection: Peak AC, DC B, C connection: DC
			B	5.0 A	3.2 A	
			C	7.0 A	4.8 A	
	Peak load current	I_{peak}		10 A	7.0 A	100ms (1 shot), $V_L = DC$ at A connection
Power dissipation	P_{out}		600 mW			
Total power dissipation		P_T		650 mW		
I/O isolation voltage		V_{iso}		1,500 Vrms		
Ambient temperature	Operating	T_{opr}		-40 to +85°C -40 to +185°F		(Non-icing at low temperatures)
	Storage	T_{stg}		-40 to +100°C -40 to +212°F		

HE 1 Form A High Capacity (AQV25OG3)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV252G3(A)	AQV255G3(A)	Condition	
Input	LED operate current	Typical	I _{Fon}	—	0.5 mA		I _L = 100mA
		Maximum			3 mA		
	LED turn off current	Minimum	I _{Foff}	—	0.2 mA		I _L = 100mA
Typical		0.4 mA					
LED dropout voltage	Typical	V _F	—	1.32 V (1.14 V at I _F = 5 mA)		I _F = 50 mA	
				Maximum	1.5 V		
Output	On resistance	Typical	R _{on}	A	0.033 Ω		I _F = 5 mA I _L = Max. Within 1 s
					Maximum	0.06 Ω	
		Typical	R _{on}	B	0.017 Ω		
					Maximum	0.04 Ω	
	Typical	R _{on}	C	0.0095 Ω			
				Maximum	0.02 Ω		
Off state leakage current	Maximum	I _{Leak}	—	1 μA		I _F = 0 mA, V _L = Max.	
Transfer characteristics	Turn on time*	Typical	T _{on}	—	1.8 ms		I _F = 5 mA, I _L = 100 mA V _L = 10 V
		Maximum			5 ms		
	Turn off time*	Typical	T _{off}	—	0.15 ms		I _F = 5 mA, I _L = 100 mA V _L = 10 V
		Maximum			0.5 ms		
	I/O capacitance	Typical	C _{iso}	—	0.8 pF		f = 1 MHz V _B = 0 V
		Maximum			1.5 pF		
Initial I/O isolation resistance	Minimum	R _{iso}	—	1,000 MΩ		500 V DC	
Max. operating frequency	Maximum	—	—	2.5 cps		I _F = 5 mA, duty = 50% I _L = Max., V _L = Max.	

*Turn on/Turn off time

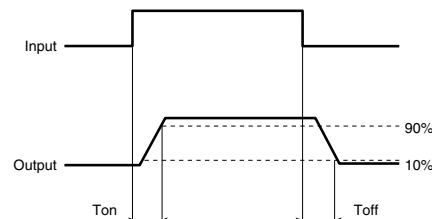

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item	Symbol	Min.	Max.	Unit
LED forward current	I _F	5	30	mA
AQV252G3(A) Load voltage (Peak AC)	V _L	—	48	V
AQV252G3(A) Continuous load current (A connection)	I _L	—	3.3	A
AQV255G3(A) Load voltage (Peak AC)	V _L	—	80	V
AQV255G3(A) Continuous load current (A connection)	I _L	—	2.4	A

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA

1.-(1) Load current vs. ambient temperature characteristics

Sample: AQV252G3


Allowable ambient temperature: -40 to +85°C
-40 to +185°F

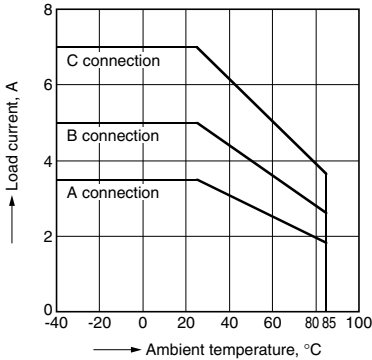

1.-(2) Load current vs. ambient temperature characteristics


Sample: AQV255G3

Allowable ambient temperature: -40 to +85°C
-40 to +185°F

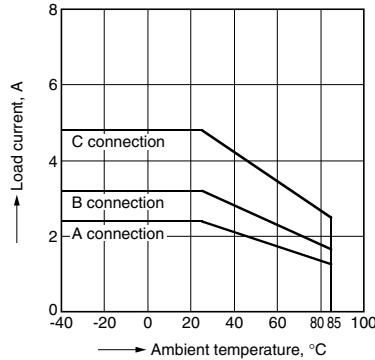

2. On resistance vs. ambient temperature characteristics


Measured portion: between terminals 4 and 6;
LED current: 5 mA; Load voltage: Max. (DC)
Continuous load current: Max. (DC)

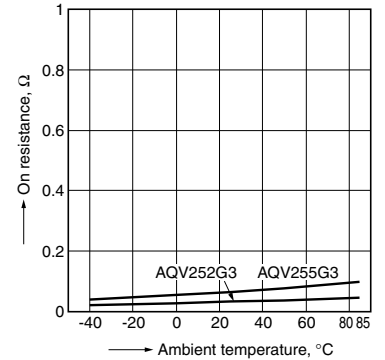

3. Turn on time vs. ambient temperature characteristics


Tested sample: All;

LED current: 5 mA; Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

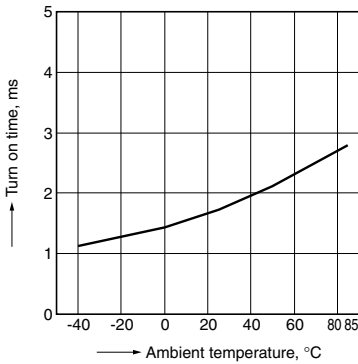

4. Turn off time vs. ambient temperature characteristics


LED current: 5 mA; Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

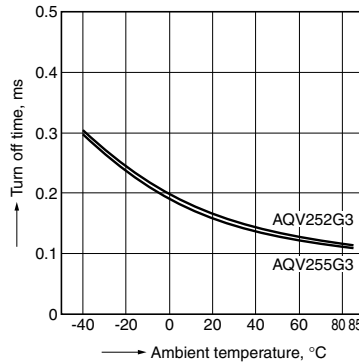

5. LED operate current vs. ambient temperature characteristics

Tested sample: All;


Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

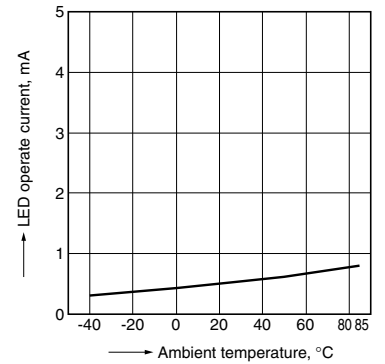

6. LED turn off current vs. ambient temperature characteristics

Tested sample: All;


Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

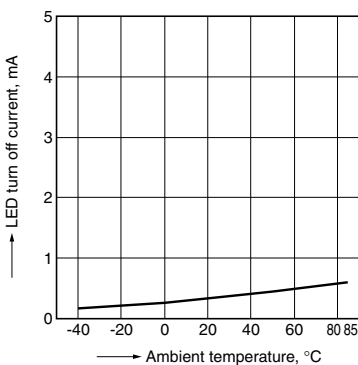

7. LED dropout voltage vs. ambient temperature characteristics


Tested sample: All;

LED current: 5 to 50 mA

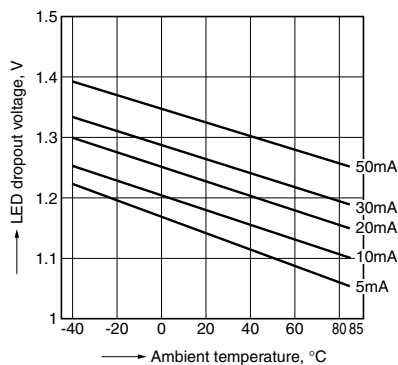

8. Current vs. voltage characteristics of output at MOS portion


Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

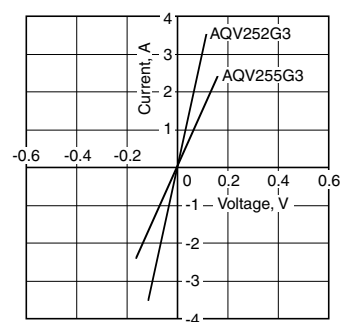

HE 1 Form A High Capacity (AQV250G3)


9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

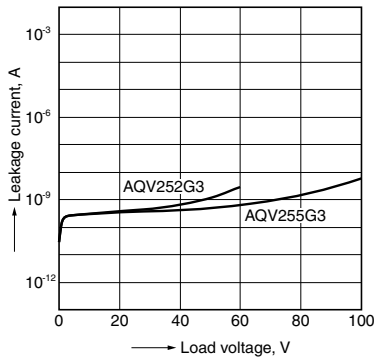


10. Turn on time vs. LED forward current characteristics

Tested sample: All;
Measured portion: between terminals 4 and 6;
Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC);
Ambient temperature: 25°C 77°F

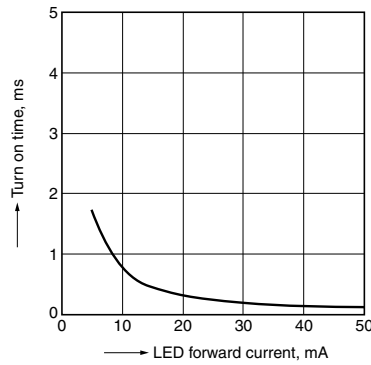


11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC);
Ambient temperature: 25°C 77°F

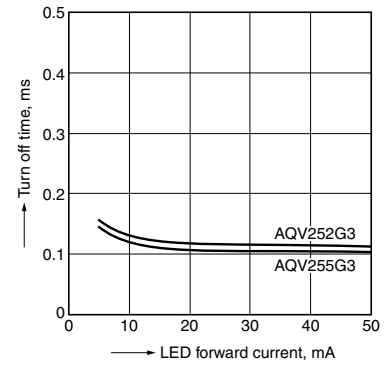


12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz;
Ambient temperature: 25°C 77°F

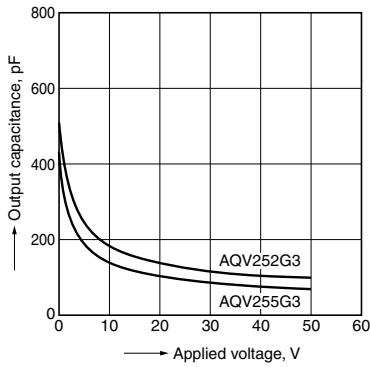

13. Max. operating frequency vs. load voltage and load current characteristics

LED current: 5 mA
Ambient temperature: 25°C 77°F

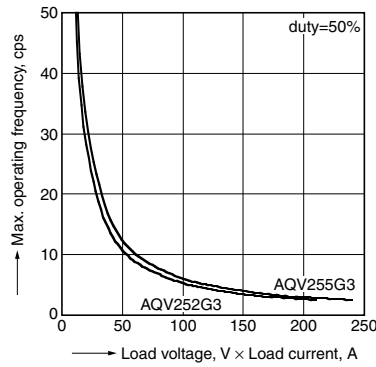

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solid State Relays - PCB Mount](#) category:

Click to view products by [Panasonic](#) manufacturer:

Other Similar products are found below :

[M86F-2W](#) [M90F-2W](#) [G2-1A07-ST](#) [G2-1A07-TT](#) [G2-1B02-TT](#) [G2-DA06-ST](#) [G3CN-202PL-3-US DC12](#) [G3CN-203P DC3-28](#)
[G3RDX02SNUSDC12](#) [PLA134S](#) [DMP6202A](#) [DS11-1005](#) [AQ3A2-ZT432VDC](#) [AQV212J](#) [AQV214SD02](#) [AQV252GAJ](#) [AQW414EA](#)
[AQY212SXT](#) [AQY221N2SJ](#) [AQY221R2SJ](#) [EFR1200480A150](#) [LCA220](#) [LCB110S](#) [1618400-5](#) [SR75-1ST](#) [AQV212AJ](#) [AQV238AD01](#)
[AQW414TS](#) [AQY210SXT](#) [AQY212ST](#) [AQY214SXT](#) [AQY221N2V1YJ](#) [AQY275AXJ](#) [G2-1A02-ST](#) [G2-1A02-TT](#) [G2-1A03-ST](#) [G2-1A03-](#)
[TT](#) [G2-1A05-ST](#) [G2-1A06-TT](#) [G2-1A23-TT](#) [G2-1B01-ST](#) [G2-1B01-TT](#) [G2-1B02-ST](#) [G2-DA03-ST](#) [G2-DA03-TT](#) [G2-DA06-TT](#) [G3M-](#)
[203PL-UTU-1 DC24](#) [CPC2330N](#) [3-1617776-2](#) [CTA2425](#)