

## **RONDA-WAS2-C**

Asymmetric beam ideal for floor installations with holder C compatible with LEDiL HEKLA

#### **TECHNICAL SPECIFICATIONS:**

Dimensions Ø 53.9 mm

Height 16 mm Fastening socket

Colour clear

Box size

Box weight 0 kg

Quantity in Box 420 pcs


ROHS compliant yes 1



#### **MATERIAL SPECIFICATIONS:**

Component	Туре	Material	Colour
RONDA-WAS2	Lens	PMMA	clear
RONDA-HLD-C	Holder	PC	clear



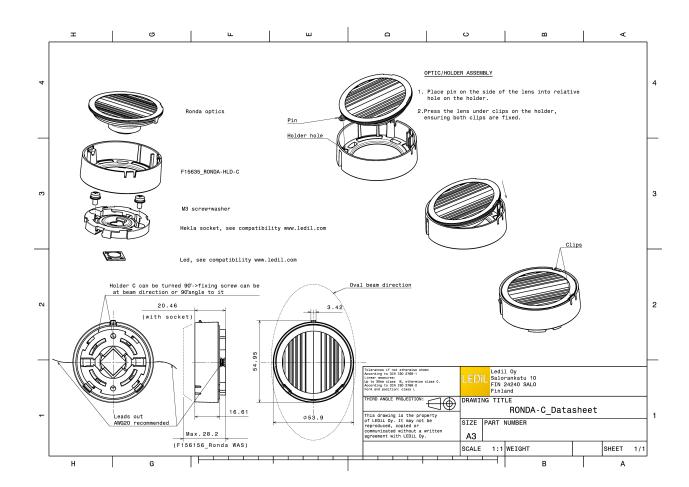

## PHOTOMETRIC DATA (MEASURED):


bridgelux.

LED V6 Gen6 FWHM Asymmetric

Efficiency 89 %
Peak intensity 0.960 cd/lm
Required components:

F15253\_HEKLA-SOCKET-A






bridgelux.

LED VERO10 FWHM Asymmetric

Efficiency 89 %
Peak intensity 0.780 cd/lm
Required components:

F15616\_HEKLA-SOCKET-F




bridgelux

LED Vesta TW 9mm (12W)

FWHM Asymmetric
Efficiency 86 %
Peak intensity 0.740 cd/lm
Required components:

C16142\_HEKLA-SOCKET-K




**CITIZEN** 

LED CLC020 Series (Dim-To-Warm)

FWHM Asymmetric
Efficiency 86 %
Peak intensity 0.820 cd/lm
Required components:

C16142\_HEKLA-SOCKET-K





## PHOTOMETRIC DATA (MEASURED):


# **CITIZEN**

LED CLL02x/CLU02x (LES10)

FWHM Asymmetric Efficiency 87 %

Peak intensity 0.770 cd/lm Required components:

F15255\_HEKLA-SOCKET-C



## **CITIZEN**

LED CLL03x/CLU03x

FWHM Asymmetric


Efficiency 86 %

Peak intensity 0.610 cd/lm

Required components:

F15859\_HEKLA-SOCKET-I





## **CITIZEN**

LED CLU700/701


FWHM Asymmetric

Efficiency 88 %

Peak intensity 0.960 cd/lm

Required components:

F15255\_HEKLA-SOCKET-C



# CREE \$

LED CMA1516


FWHM Asymmetric

Efficiency 91 %

Peak intensity 0.800 cd/lm

Required components:

F15256\_HEKLA-SOCKET-D



## PHOTOMETRIC DATA (MEASURED):

# CREE 💠

LED CMA1825

FWHM Asymmetric


Efficiency 91 %

Peak intensity 0.700 cd/lm

Required components:

F15254\_HEKLA-SOCKET-B





## CREE \$

LED CXA/B 13xx

FWHM Asymmetric


Efficiency 89 %

Peak intensity 0.970 cd/lm

Required components:

F15956\_HEKLA-SOCKET-J





# CREE 🕏

LED CXA/B 15xx


FWHM Asymmetric

Efficiency 89 %

Peak intensity 0.810 cd/lm

Required components:

F15256\_HEKLA-SOCKET-D



## **DESCRIPTION** LUMILEDS

LED LUXEON CoB 1202s


FWHM Asymmetric

Efficiency 89 %

Peak intensity 0.940 cd/lm

Required components:

F15848\_HEKLA-SOCKET-G




## PHOTOMETRIC DATA (MEASURED):

## **ELUMINUS**

LED CDM-14 (Dim-To-Warm)

FWHM Asymmetric Efficiency 82 % Peak intensity 0.600 cd/lm Required components:

C16142\_HEKLA-SOCKET-K Bender Wirth: 491 Typ L8




#### **ELUMINUS**

LED CDM-6 (Dim-To-Warm)

FWHM Asymmetric

Efficiency 85 %
Peak intensity 0.840 cd/lm
Required components:

C16142\_HEKLA-SOCKET-K Bender Wirth: 490 Typ L8




## **ELUMINUS**

LED CDM-9 (Dim-To-Warm)

FWHM Asymmetric Efficiency 85 % Peak intensity 0.750 cd/lm

Required components:

C16142\_HEKLA-SOCKET-K Bender Wirth: 490 Typ L8




## LUMINUS

LED CTM-14 (Tunable White)

FWHM Asymmetric
Efficiency 83 %
Peak intensity 0.590 cd/lm
Required components:

C16142\_HEKLA-SOCKET-K Bender Wirth: 442 Typ L8




## PHOTOMETRIC DATA (MEASURED):

## **ELUMINUS**

LED CTM-9 (Tunable White)

FWHM Asymmetric Efficiency 85 % Peak intensity 0.750 cd/lm Required components:

C16142\_HEKLA-SOCKET-K Bender Wirth: 495 Typ L8




#### **ELUMINUS**

LED CXM-14 FWHM Asymmetric

Efficiency 87 %

Peak intensity 0.610 cd/lm Required components:

F15859\_HEKLA-SOCKET-I



## LUMINUS


LED CXM-9 FWHM Asymmetric

Efficiency 88 %

Peak intensity 0.770 cd/lm

Required components:

F15255\_HEKLA-SOCKET-C



# **SAMSUNG**


Required components:

LED COB D Series LES 14.5 mm

FWHM Asymmetric Efficiency 87 % Peak intensity 0.600 cd/lm

F15859\_HEKLA-SOCKET-I





### PHOTOMETRIC DATA (MEASURED):


# SAMSUNG

LED COB D Series LES 9.8 mm

FWHM Asymmetric Efficiency 87 % Peak intensity 0.760 cd/lm Required components:

F15255\_HEKLA-SOCKET-C





## **SAMSUNG**


LED LC010C FWHM Asymmetric

Efficiency 87 %

Peak intensity 0.860 cd/lm

Required components:

F15848\_HEKLA-SOCKET-G



# **SAMSUNG**

LED LC010C G2 FWHM Asymmetric


Efficiency 88 %

Peak intensity 1.000 cd/lm

Required components:

F15255\_HEKLA-SOCKET-C





# **SAMSUNG**

LED LC020C


FWHM Asymmetric

Efficiency 88 %

Peak intensity 0.810 cd/lm

Required components:

F15848\_HEKLA-SOCKET-G





## PHOTOMETRIC DATA (MEASURED):

# **XICATO**

LED XTM - 19mm LES

FWHM Asymmetric


Efficiency 83 %

Peak intensity 0.530 cd/lm

Required components:

C16058\_XTM-ADAPTER-50-C





## PHOTOMETRIC DATA (SIMULATED):

bridgelux


LED V10 Gen7 FWHM Asymmetric

Efficiency 0 %

Peak intensity 0.800 cd/lm

Required components:

F15255\_HEKLA-SOCKET-C



**WNICHIA** 


LED COB T-Type FWHM Asymmetric

Efficiency 83 %

Peak intensity 1.070 cd/lm

Required components:

F15848\_HEKLA-SOCKET-G



**TRIDONIC** 


LED SLE G6 LES10 FWHM Asymmetric

FWHM Asymmetric Efficiency 93 %

Peak intensity 0.937 cd/lm

Required components:

F15255\_HEKLA-SOCKET-C



**XICATO** 


LED XTM - 9mm LES FWHM Asymmetric

Efficiency 92 %

Peak intensity 0.900 cd/lm

Required components:

C16058\_XTM-ADAPTER-50-C





#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

# Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Salo, Finland Hong Kong, China

#### **Distribution Partners**

www.ledil.com/ where\_to\_buy

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Lighting Lenses Assemblies category:

Click to view products by Ledil manufacturer:

Other Similar products are found below:

FCN12592\_LE1-D-COP CA11362\_IRIS CA16127\_OLGA-S CP16107\_CARMEN-50-S-C CS15763\_STRADA-2X2MX-8-VSM C17171\_DAISY-8X1-SHD-MATT C17172\_DAISY-8X1-SHD-MATT-WHT C17173\_DAISY-4X1-WW-US C17341\_DAISY-4X1-WW-US-D CS15759\_HB-2X2MX-8-W CS15769\_STRADA-2X2MX-8-T2-S CA16435\_LXP2-SS-WAS CS13756\_STRADA-IP-2X6-DWC-PC CN16210\_GABRIELLA-MIDI-W CP17138\_CARMEN-M2-C-WHT CP17137\_CARMEN-M2-C CA16015\_STRADA-SQ-SCL C16989\_DAISY-7X1-W2 C17225\_DAISY-7X1-SHD-WHT-MATT C17296\_ILONA-ZOOM-SUB FP15752\_STRADA-2X2MXS-T3 C16590\_DAISY-4X1-SHD FP16562\_LISA3-WWW-PIN CX15819\_GABRIELLA-45-W C16870\_DAISY-7X1-WW CP12939\_LARISA-RS-CLIP16 C14636\_XTM-PF-ADAPTER CA14506\_G2-LXP2-RS2 CA14508\_G2-LXP2-D FCP13895\_SEANNA-A FN14637\_OLIVIA-S CP12943\_LARISA-O-CLIP16 FP11124\_LISA2-O-PIN CP10444\_LISA-SS CS14597\_HB-IP-2X6-O CP14995\_FLORENTINA-HLD-O CA16128\_OLGA-M CP14994\_FLORENTINA-HLD-M CP15775\_CARMEN-M-C CS15158\_STRADA-IP-2X6-T4-B CS15363\_STRADA-IP-2X6-T2-B CS15751\_STRADA-2X2MX-8-DWC CS15886\_STRADA-IP-2X6-T2-B-90 CS16323\_STRADELLA-IP-28-HB-M FN14976\_STELLA-DWC2 FN15264\_STELLA-HB-WWW FN15966\_RONDA-WWW-C FN15971\_RONDA-WAS-C FP15073\_ZORYA-SC-B CA15584\_ZORYA-MINI-TAPE