

# ELECTRICAL SOCKET

## SD 035



> Quickly connected  
 > Available with or without fuse



> Clip fixing

The DIN rail mounted electrical socket can be quickly fitted and connected in enclosures allowing the use of auxiliary products such as hand lamps, measuring devices, soldering irons etc. The unit is available with and without fuse and in many world socket standards.



### TECHNICAL DATA

Connection	3 x pressure clamps for stranded and rigid wire 0.5 - 2.5mm <sup>2</sup>
Mounting	clip for 35mm DIN rail, EN 60715
Casing	plastic according to UL94 V-0, light grey
Dimensions	92 x 62 x 48mm
Weight	approx. 0.2kg
Fitting position	variable
Operating/Storage temperature	-45 to +70°C (-49 to +158°F)
Operating/Storage humidity	max. 90% RH (non-condensing)
Protection type/Protection class	IP20 / I (earthed)

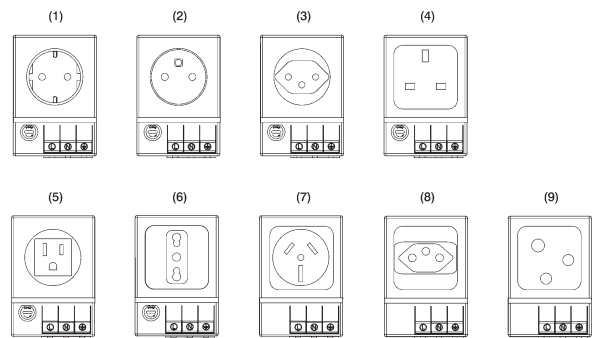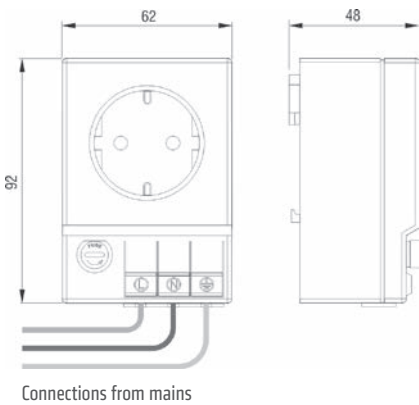

Art. No.	Operating voltage max.	Socket	Model	Nominal current	Approvals
03500.0-00	250VAC	Germany/Russia (1)	with fuse <sup>1</sup>	6.3A	EAC
03500.0-01	250VAC	Germany/Russia (1)	without fuse	16.0A	EAC
03501.0-00	250VAC	F/PL/CZ/SK (2)	with fuse <sup>1</sup>	6.3A	-
03501.0-01	250VAC	F/PL/CZ/SK (2)	without fuse	16.0A	-
03502.0-00	250VAC	Switzerland (3)	with fuse <sup>1</sup>	6.3A	-
03502.0-01	250VAC	Switzerland (3)	without fuse	10.0A	-
03503.0-00	250VAC	UK/Ireland (4)	with fuse <sup>1</sup>	6.3A	-
03503.0-01	250VAC	UK/Ireland (4)	without fuse	13.0A	-
03504.0-00	125VAC	USA/Canada (5)	with fuse <sup>1</sup>	6.3A	UL File No. E222026
03504.0-01	125VAC	USA/Canada (5)	without fuse	15.0A	UL File No. E222026
03505.0-00	250VAC	Italy (6)	with fuse <sup>1</sup>	6.3A	-
03505.0-01	250VAC	Italy (6)	without fuse	16.0A	-
03507.0-01	240VAC	Australia (7)	without fuse	10.0A	-
03508.0-01	250VAC	Brazil (8)	without fuse	10.0A	-
03509.0-01	250VAC	Old British - BS 546 (9)	without fuse	5.0A	-

<sup>1</sup> fuse Ø 5 x 20mm