



07 HCP, 07 HCP/T


For High Currents

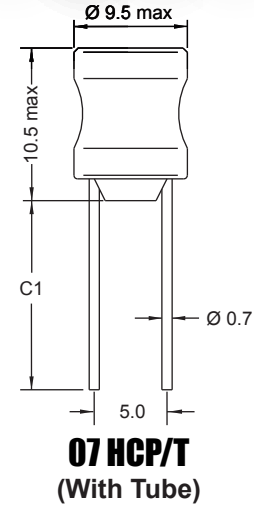

Packing	C1
Loose / Box [-50]	13.0
Taped / Reel [-51]	26.0

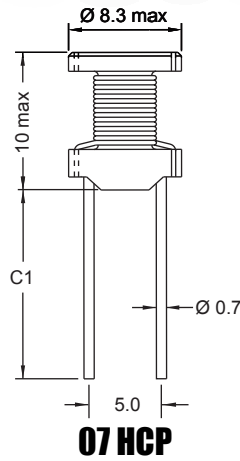

Typical Ls vs Current (I)

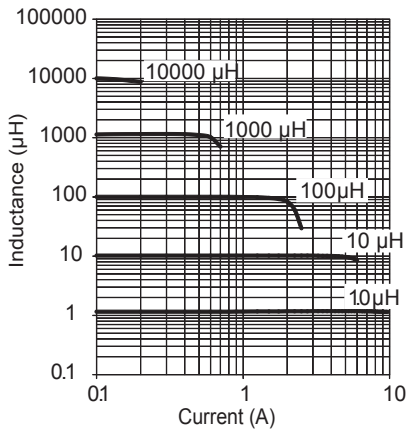

Part No	Inductance L (µH)	f _L (kHz)	Tol. ± (%)	DCR max (Ω)	Rated DC Current (A)	
					I _N max	I _{sat} typ
* 07HCP-1R0M-YY	1.0	1 @ 0.25V	20	0.007	7.50	10.0
* 07HCP-2R2M-YY	2.2	1 @ 0.25V	20	0.010	6.00	8.00
* 07HCP-3R3M-YY	3.3	1 @ 0.25V	20	0.013	5.00	6.30
07HCP-4R7M-YY	4.7	1 @ 0.25V	20	0.018	4.00	5.40
* 07HCP-6R8M-YY	6.8	1 @ 0.25V	20	0.025	3.80	6.50
* 07HCP-7R5M-YY	7.5	1 @ 0.25V	20	0.030	3.00	5.00
07HCP-100M-YY	10	1 @ 0.25V	20	0.040	2.60	5.00
07HCP-220X-YY	22	1 @ 0.25V	10,20	0.055	2.30	3.60
07HCP-330X-YY	33	1 @ 0.25V	10,20	0.10	1.50	2.50
07HCP-470X-YY	47	1 @ 0.25V	10,20	0.10	1.30	2.50
07HCP-680X-YY	68	1 @ 0.25V	10,20	0.14	1.10	2.10
07HCP-820X-YY	82	1 @ 0.25V	10,20	0.16	1.00	1.90
07HCP-101X-YY	100	1 @ 0.25V	10,20	0.19	0.90	1.60
07HCP-121X-YY	120	1 @ 0.25V	10,20	0.22	0.85	1.20
07HCP-151X-YY	150	1 @ 0.25V	10,20	0.36	0.85	1.20
07HCP-221X-YY	220	1 @ 0.25V	10,20	0.38	0.64	1.20
07HCP-271X-YY	270	1 @ 0.25V	10,20	0.70	0.64	0.95
07HCP-331X-YY	330	1 @ 0.25V	10,20	0.70	0.51	0.95
07HCP-391X-YY	390	1 @ 0.25V	10,20	0.89	0.50	0.80
07HCP-471X-YY	470	1 @ 0.25V	10,20	0.89	0.43	0.80
07HCP-681X-YY	680	1 @ 0.25V	10,20	1.43	0.43	0.70
07HCP-821X-YY	820	1 @ 0.25V	10,20	1.56	0.36	0.70
07HCP-102X-YY	1000	1 @ 0.25V	10,20	1.95	0.30	0.50
07HCP-122X-YY	1200	1 @ 0.25V	10,20	2.90	0.30	0.39
07HCP-152X-YY	1500	1 @ 0.25V	10,20	3.30	0.30	0.30
07HCP-182X-YY	1800	1 @ 0.25V	10,20	3.30	0.21	0.35
07HCP-222X-YY	2200	1 @ 0.25V	10,20	5.30	0.19	0.25
07HCP-272X-YY	2700	1 @ 0.25V	10,20	6.80	0.24	0.17
07HCP-332X-YY	3300	1 @ 0.25V	10,20	9.30	0.14	0.22
07HCP-402X-YY	4000	1 @ 0.25V	10,20	10.30	0.14	0.22
07HCP-472X-YY	4700	1 @ 0.25V	10,20	16.50	0.14	0.17
07HCP-103X-YY	10000	1 @ 0.25V	10,20	24.00	0.14	0.17

Core Material : Ferrite

Revision date : 22 Feb 2017

SPQ :	Packing Form	Loose / Box	Taped / Reel
	Radial	500 [-50]	500 [-51]

Remarks: - Also available with shorter leads.

- All 07HCP, 07HCP/T are specified for 150°C except the models with *, which are specified for 125°C.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Fastron](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)