

EPIC® H-B 24 AG

Housing design H-B. The industry standard.
Safe fixing with 4 screws



Automation



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Application range

Plant engineering
Light & sound technology
Plastics industry

Product features

Panel-mount base
Dual levers
Included: flat gasket

Technical Data

Material:

Housing: powder-coated aluminium alloy, grey

Lever: zinc-plated steel

Sealing: NBR

Protection rating:


IP 65 (latched)

Temperature range:

-40°C to +100°C, short-term up to +125°C

Note

Photographs are not to scale and do not represent detailed images of the respective products.

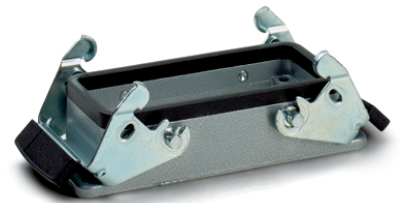



EPIC® H-B 24 AG

Part number	Article description	Pieces / PU
H-B housing: panel-mount base (double lever)		
10102000	H-B 24 AG	5

EPIC® H-B 24 AG

