


Spectra-Zip® PVC .025" center cable

191-3X0X series

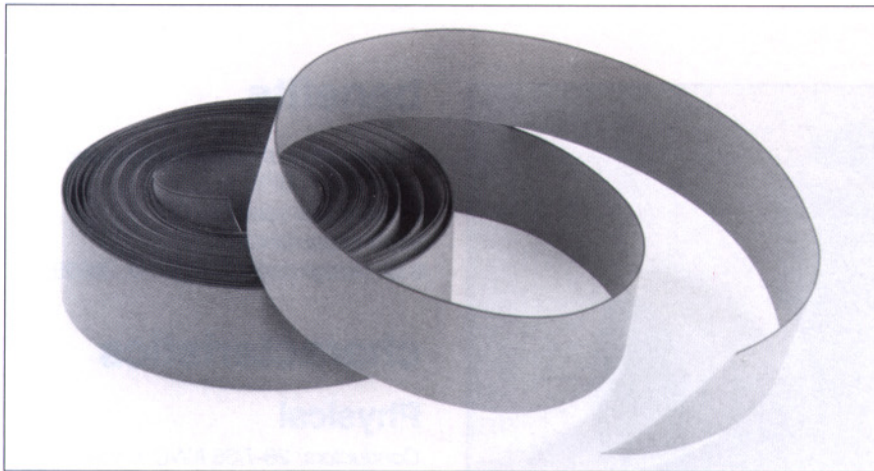

characteristics physical

Conductors: copper, see chart below
Insulation: .0075" (0,19mm) wall PVC
Pitch: 0.025"±0.002" (0,64±0,05 mm) centers
Color: gray (one edge black)
Temperature rating: -20°C to +105°C (-4°F to +221°F)

electrical


Voltage: 150 V
Current rating: 0.8 amps nominal @ 10°C rise above ambient
Propagation delay: 1.60 ns/ft (5,25 ns/m) nominal
Insulation resistance: 10¹⁰ ohms - 10' (3 m) min.
Crosstalk: 10' (3 m) sample, 5 ns rise time with 2 lines driven, unbalanced mode (see below)
UL style: #2678, rated 105°C (+221°F)

description

Spectra-Strip® PVC .025" center zip cable is designed to meet industry requirements for interconnect miniaturization. Applications include any system requiring a higher signal density or an inexpensive alternative to transmission cable. Standard put-up is 100' coils. Longer lengths are available upon request.

benefits

- High density center-to-center spacing allows increased miniaturization
- Precise spacing for controlled electrical characteristics
- Easy, fast mass-termination
- Easy identification of # 1 conductor with edge mark
- Double contour allows termination from either side of cable
- UL recognized

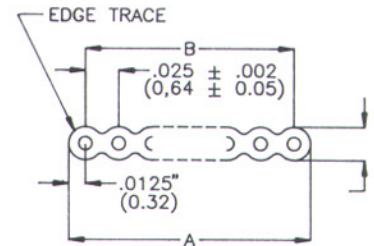

Part Number	191-3003	191-3005	191-3203	191-3205
Conductors	30-1 solid bare	30-7/38 tinned	32-1 solid bare	32-7/40 tinned
Thickness	.025"±.002"	.027"±.002"	.023"±.002"	.024"±.002"
Impedance	80 ohms	70 ohms	95 ohms	90 ohms
Capacitance (nominal)	19.0 pf/ft (62,3 pf/m) @ 1 MHz	25.0 pf/ft (82,0 pf/m) @ 1 MHz	18.0 pf/ft (59,06 pf/m) @ 1 MHz	18.0 pf/ft (59,06 pf/m) @ 1 MHz
Inductance (nominal)	.15 µh/ft (.49 µh/m) @ 1.0 MHz	.14 µh/ft (.46 µh/m) @ 1.0 MHz	.17 µh/ft (.56 µh/m) @ 1.0 MHz	.16 µh/ft (.52 µh/m) @ 1.0 MHz
Crosstalk	near end: * 2.6%	near end: * 2.6%	near end: * 2.6%	near end: * 2.6%
* ground-signal-ground	far end: * 3.7%	far end: * 3.7%	far end: * 3.7%	far end: * 3.7%
**ground-ground-signal	near end: ** 1.0%	near end: ** 1.0%	near end: ** 1.0%	near end: ** 1.0%
-ground-ground	far end: ** 2.0%	far end: ** 2.0%	far end: ** 2.0%	far end: ** 2.0%

order information

30-1 BARE SOLID	30-7/38 TINNED	32-1 BARE SOLID	32-7/40 TINNED	# COND	WIDTH A		SPAN B	
					INCHES	(mm)	INCHES	(mm)
191-3003-010	191-3005-010	191-3203-010	191-3205-010	10	.250	(6,35)	.225±.005	(5,72±0,13)
191-3003-016	191-3005-016	191-3203-016	191-3205-016	16	.400	(10,16)	.375±.005	(9,53±0,13)
191-3003-020	191-3005-020	191-3203-020	191-3205-020	20	.500	(12,70)	.475±.005	(12,07±0,13)
191-3003-026	191-3005-026	191-3203-026	191-3205-026	26	.650	(16,51)	.625±.005	(15,88±0,13)
191-3003-034	191-3005-034	191-3203-034	191-3205-034	34	.850	(21,59)	.825±.006	(20,96±0,15)
191-3003-040	191-3005-040	191-3203-040	191-3205-040	40	1.000	(25,40)	.975±.006	(24,77±0,15)
191-3003-050	191-3005-050	191-3203-050	191-3205-050	50	1.250	(31,75)	1.225±.006	(31,12±0,15)
191-3003-060	191-3005-060	191-3203-060	191-3205-060	60	1.500	(38,10)	1.475±.006	(37,47±0,15)
191-3003-064	191-3005-064	191-3203-064	191-3205-064	64	1.600	(40,64)	1.575±.006	(40,01±0,15)
191-3003-068	191-3005-068	191-3203-068	191-3205-068	68	1.700	(43,18)	1.675±.007	(42,55±0,18)
191-3003-080	191-3005-080	191-3203-080	191-3205-080	80	2.000	(50,80)	1.975±.007	(50,17±0,18)
191-3003-100	191-3005-100	191-3203-100	191-3205-100	100	2.500	(63,50)	2.475±.007	(62,87±0,18)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ribbon Cables / IDC Cables](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[FSK-12A Ribbon Cable, 6 Pin, 500mm](#) [AWG28-10G EHV3C EHV4C EHV5C](#) [cab-LVDV-PWR-10-15 FSP-25A Ribbon Cable, 4 Pin, 350mm](#)
[Ribbon Cable, 6 Pin, 300mm](#) [cab-LVDV-DAT-34-15](#) [49635-C62-S2](#) [1-3636-600-5204](#) [92315-1408](#) [100063-0094](#) [100063-0106](#) [100063-0102](#)
[100063-0104](#) [MMSD-02-20C-F-15.00-S-K](#) [100063-0099](#) [100063-0105](#) [100063-0095](#) [100063-0103](#) [100063-0093](#) [100063-0091](#) [2200000068](#)
[100063-0092](#) [100063-0101](#) [100063-0100](#) [100063-0097](#) [TFSDT-08-28-H-15.00-S](#) [S1SD-02-30-GF-09.00-L](#) [MMSD-02-22C-F-15.00-S-K](#)
[S1SS-02-28C-GF-02.00-L](#) [S1SDT-02-28-GF-03.00-L](#) [2-1589735-3](#) [JSM015PP2DCC23N](#) [92301-0283](#) [TCSD-22-D-26.00-01](#) [S1SST-07-30-](#)
[GF-06.00-L](#) [T2SD-20-24-L-07.87-TR-NUS](#) [DS1057-01-44A282R-30.5](#) [FFSD-06-S-17.00-01-N](#) [IDSS-03-D-20.00-T](#) [TCMD-17-S-36.00-01-](#)
[SR](#) [92301-0718](#) [839023](#) [490107670612S](#) [MMSDT-06-20-S-05.5-D-K-LDX](#) [IDD-04-G](#)