

**Interface module; with D-subminiature male connector; 37-pole;  
for mating connectors with idc; Vertical mounting**

Item No.: 289-443



Interface module; with D-subminiature male connector; 37-pole; for mating connectors with idc; Vertical mounting

## Marking

RoHS ✓  
Compliant

## Business data

Supplier	WAGO
Item no.	289-443
GTIN / EAN	4045454434717
Content	1
Order amount	1
Customer item number	

## Notes

## Technical data



### Miscellaneous


No. of poles	37
Pollution degree (1)	2
Rated voltage EN (1) [V]	50 [V]
Rated surge voltage (1) [kV]	0.8 [kV]
Wire connection 1	WAGO 236 Series
Operating voltage	125 V AC / DC
Nominal current [A]	1 [A]
Ambient operating temperature	-20 °C ... +50 °C
Connector contact	Au over Ni

Printview: Interface module; with D-subminiature male connector; 37-pole; for mating connectors with idc;  
Vertical mounting - Item No.: 289-443

<b>Technical data</b>	
Contact resistance [m]	30 [m]
Performance level	2 / 200 mating cycles
Connection technology (1)	CAGE CLAMP®
Solid sizes 1	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Strip length 1	5 ... 6 mm / 0.2 ... 0.24 in
Weight [g]	70.742 [g]
Width	120 mm / 4.724 in
Height from upper-edge of DIN-rail [mm]	19 [mm]
Height from upper-edge of DIN-rail	19 mm / 0.748 in
Length	63.5 mm / 2.5 in
Storage temperature	-40 °C ... +70 °C
Type of mounting	DIN 35 rail

Images & drawings

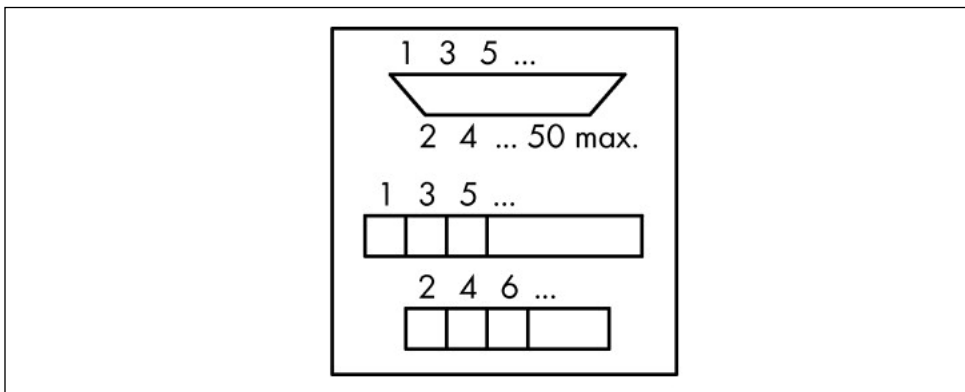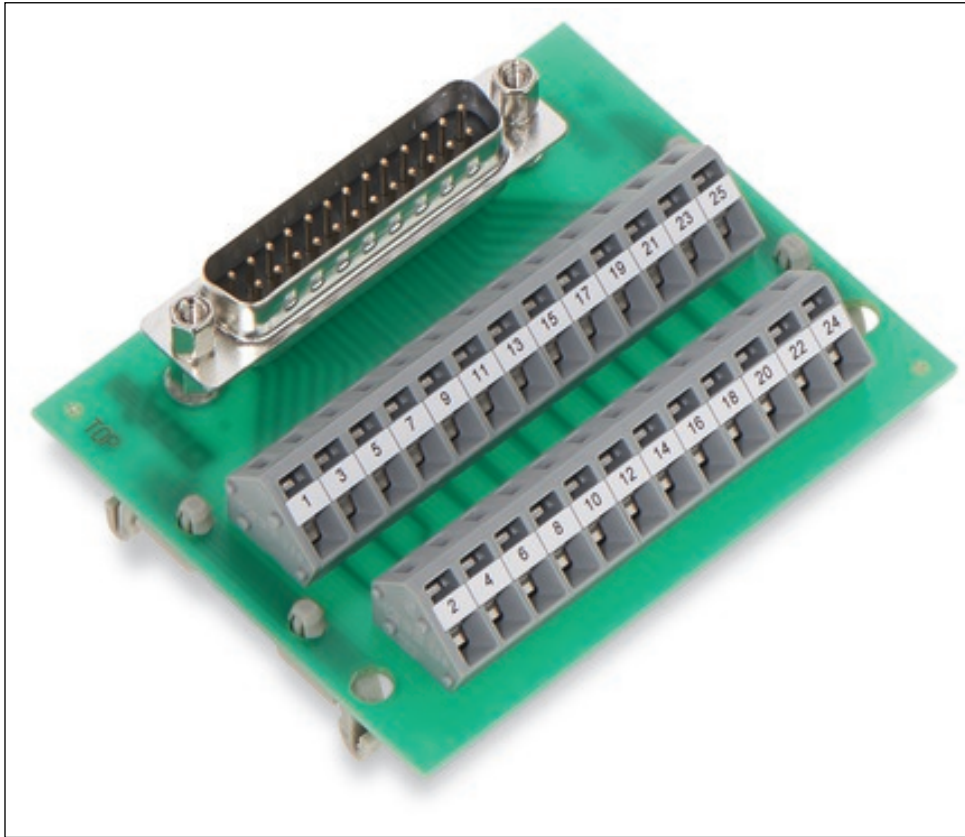

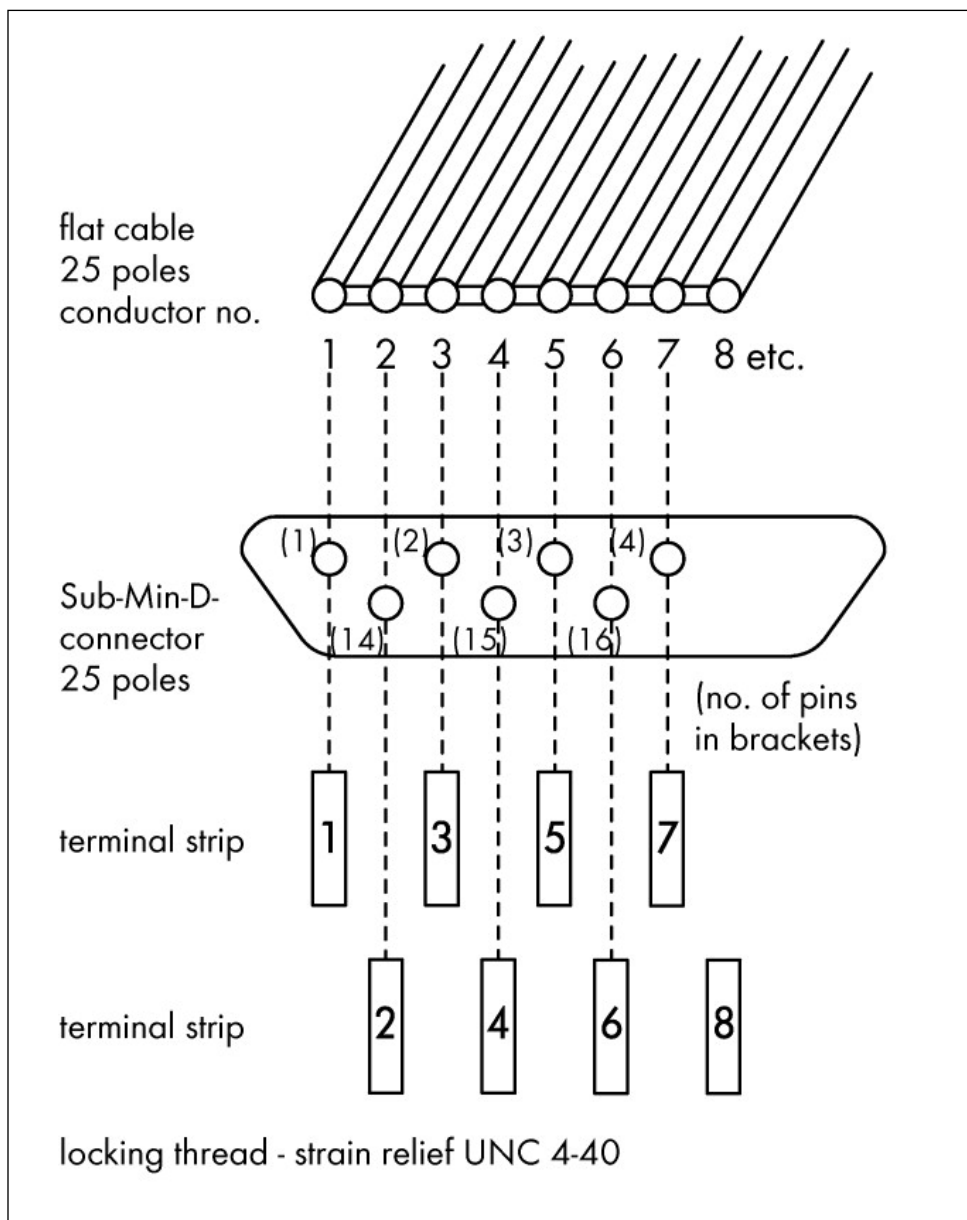

#### Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.