

SITOR SEMICONDUCTOR FUSE 125A AR 690V
AC/440V DC

Model		
product brand name		SETRON
Design of an identification indicator		front indicator
Design of the fuse link		SITOR, LV HRC design

General technical data		
Size of fuse system / acc. to DIN EN 60269-1		NH1
Operating class of the fuse link		aR
circuit-breaker / Design		3NE
Supply voltage / at DC	V	440

Dissipation		
Power loss [W]		
<ul style="list-style-type: none"> for rated value of the current / at AC / in hot operating state / per pole 	W	29

Electricity		
rated current I _n / IEC, DIN/VDE / at 40 Cel	A	125
Current / at AC / rated value	A	125

Mechanical Design		
Mounting position		Any, preferably vertical

Environmental conditions		
Ambient temperature		
<ul style="list-style-type: none"> minimum 	°C	-20
<ul style="list-style-type: none"> maximum 	°C	50
Environmental category		-20 to +50 at 95% relative humidity

Certificates		
Equipment marking		
<ul style="list-style-type: none"> acc. to DIN EN 61346-2 		F
<ul style="list-style-type: none"> acc. to DIN EN 81346-2 		F

General Product Approval



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NE82220MK>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NE82220MK/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=3NE82220MK

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

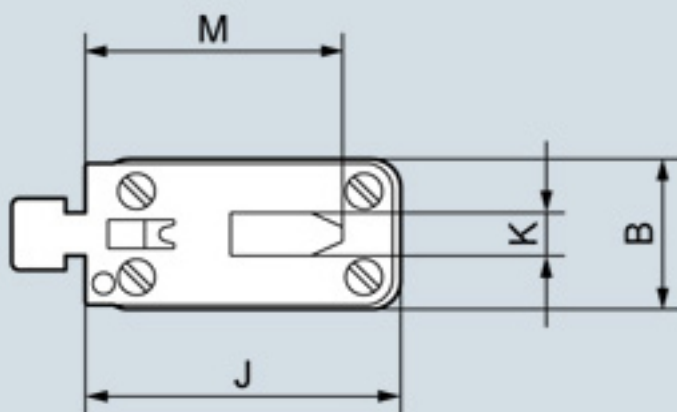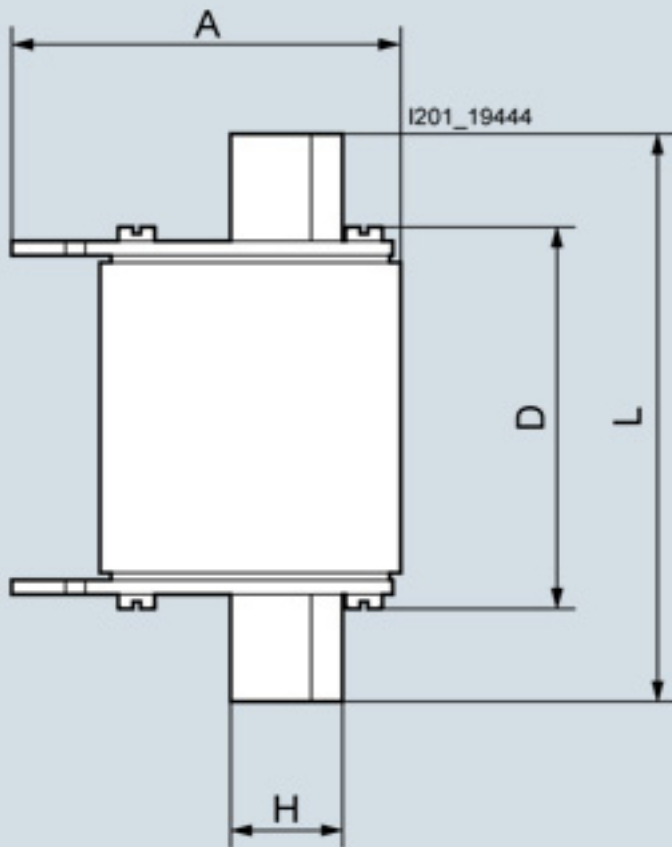

Type	Dimensions							
	A	B	D	H	J	K	M	L
3NE88..-0MK	53	21	51,5	15	43	6	35	78,5
3NE82..-0MK	62,5	44	70,5	20	53	6	40	135
3NE83..-0MK	68	50	70,5	25	61	6	48	150

last modified:

12.04.2016