

SIEMENS

Product data sheet

3TX7005-1MB00

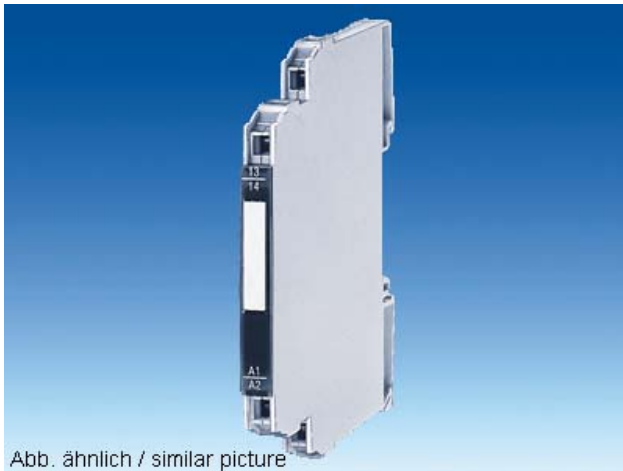


Abb. ähnlich / similar picture

OUTPUT INTERFACE TWO-TIER TERMINAL-TYPE
COUPLING RELAY 1NO,
DC 24V CAGE CLAMPS WIDTH 6.2MM

General technical details:

| | |
|--|------------|
| Type of voltage | AC/DC |
| Supply voltage frequency / for auxiliary and control current circuit / rated value | |
| • minimum | 50 Hz |
| • maximum | 60 Hz |
| Control supply voltage | |
| • at 50 Hz / for AC / rated value | |
| • minimum | 24 V |
| • maximum | 24 V |
| • at 60 Hz / for AC / rated value | |
| • minimum | 24 V |
| • maximum | 24 V |
| • for DC / rated value | |
| • minimum | 24 V |
| • maximum | 24 V |
| Number of NC contacts / for auxiliary contact | 0 |
| Number of NO contacts / for auxiliary contact | 1 |
| Number of change-over switches / for auxiliary contact | 0 |
| Switching behaviour | monostable |

| Mechanical design: | |
|---|-------------------------|
| Design of the electrical connection | spring-loaded terminals |
| Design of the electrical connection / Jumper socket | No |
| Design of the relay operating mechanism | poled |
| Design of the switching function | NO contact |
| • guided | No |
| Product component / Jumper socket | No |
| Width | 6.2 mm |
| Height | 60 mm |
| Depth | 62 mm |
| Ambient conditions: | |
| Protection class IP | IP20 |
| last change: | 10/31/2006 |

| | | |
|------------------------------|------------|--|
| Technical Assistance: | Telephone: | +49 (0) 911-895-5900 (8° - 17° CET) |
| | Fax: | +49 (0) 911-895-5907 |
| | E-Mail: | technical-assistance@siemens.com |
| | Internet: | www.siemens.de/lowvoltage/technical-assistance |