

DIGITUS®

Professional

DIGITUS® Line Interactive UPS DN-170014-1 1000VA/600W



- ✓ 4 Ways European output
- ✓ 2~6ms transfer time(10ms max)
- ✓ Fast Chrg (4 hours 90%)
- ✓ LED monitor
- ✓ Backup time 20~30mins
- ✓ USB port & Software support

Abstract

DIGITUS® Line Interactive UPS DN-170014-1, 4ways European output 1000VA 600W

Input 160~290V AC Output 230V AC +/-10%

LED monitor. Software & USB port Supports Windows® 2000/2003/XP/Vista/2008/7/8, Linux, Unix, MAC

High performance protection for your business and office computer systems against data loss and damage

Features

- Capacity 1000VA/600W
- Input: 162~290V AC Output 230V AC +/-10%
- Typical 2-6 ms(10 ms max) Transfer Time , Charging Time 4-6 hours recover to 90% capacity. Simulated Sine Wave
- BATTERY 12 V/7 AH x 2
- Sound alarm. Overload, discharge, and overcharge protection
- Dimension (DxWxH) 350X146X160 mm Net Weight 8Kg
- USB Supports Windows® 2000/2003/XP/Vista/2008/7/8, Linux, Unix, MAC


Product Overview

DIGITUS® Line Interactive UPS with Compact size, excellent microprocessor control guarantees high reliability

Boost and buck AVR for voltage stabilization, Auto restart while AC is recovering

Off-mode charging and cold start function

DIGITUS® is made for high demand IT-Infrastructure Solutions – designed and developed on highest standard in Germany.

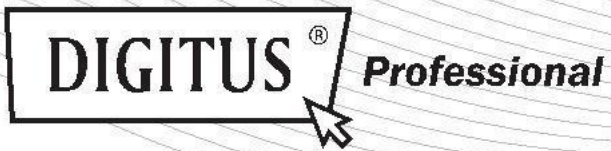

DIGITUS[®] Line Interactive UPS DN-170014-1 1000VA/600W

Part Number Information

- DN-170013-1 Line Interactive UPS, 2ways European output. 600VA 360W, Input 160~290V AC, Output 230V AC +/-10%
- DN-170014-1 Line Interactive UPS, 4ways European output 1000VA 600W, Input 160~290V AC, Output 230V AC +/-10%.
Software & USB port, LED monitor
- DN-170015-1 Line Interactive UPS, 4ways European output 1500VA 900W, Input 160~290V AC, Output 230V AC +/-10%.
Software & USB port, LED monitor

DIGITUS[®] is made for high demand IT-Infrastructure Solutions – designed and developed on highest standard in Germany.