




~ISO 14583

08.8 / 8.8

The head marking is determining

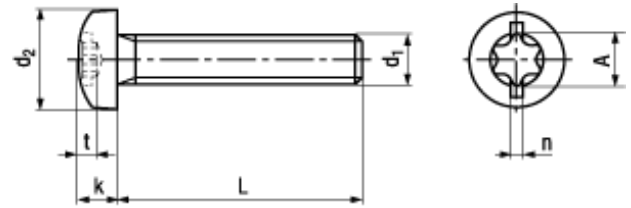

**BN 20228**

**Hexalobular (6 Lobe) socket pan head screws**


with uncontinuous slot fully threaded

Steel 08.8 / 8.8

zinc plated with thicklayer passivation



Fasteners to the given specification have a reduced loadability due to the head geometry according to ISO 898-1.

Article#	d <sub>1</sub>	d <sub>2</sub> max.	k max.	n min.		t max.	A~	L
3370237	M3	5,6	2,4	0,86	X10	1,26	2,8	8
3370233								10
3370234								12
3370235								16
3370236								20
3370242	M4	8	3,1	1,26	X20	1,6	3,9	8
3370238								10
3370239								12
3370240								16
3370241								20
3370249	M5	9,5	3,7	1,26	X25	1,9	4,5	8
3370243								10
3370244								12
3370245								16
3370246								20
3370247								25
3370248								30
3370256	M6	12	4,6	1,66	X30	2,3	5,6	8
3370250								10
3370251								12
3370252								16
3370253								20
3370254								25
3370255								30