

STRADELLA-16-HB-O

Oval beam for high bay aisles


TECHNICAL SPECIFICATIONS:

Dimensions	49.5 mm
Height	8.3 mm
Fastening	
Colour	clear
Box size	476 x 273 x 292 mm
Box weight	8.3 kg
Quantity in Box	800 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:



Component	Type	Material	Colour
STRADELLA-16-HB-O	Multi-lens	PMMA	clear

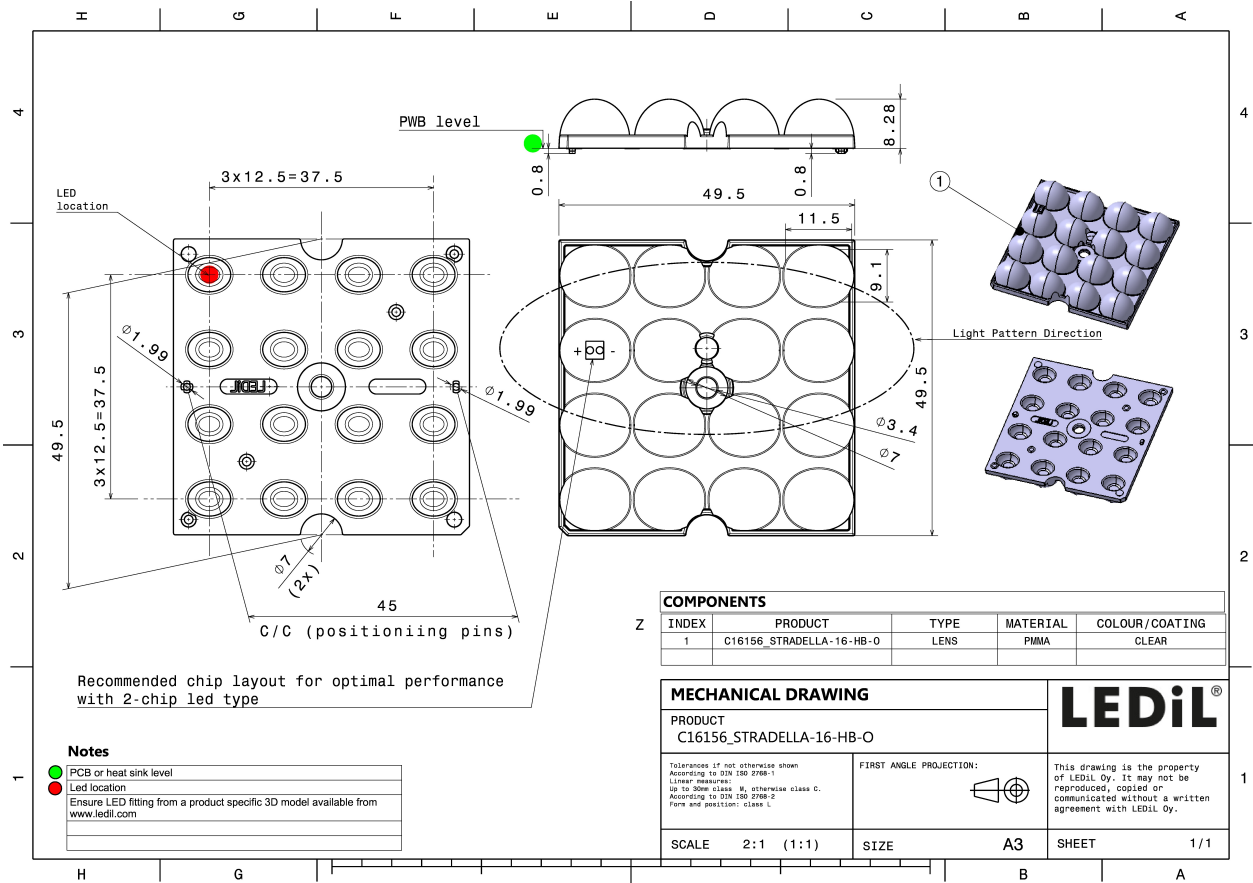

PHOTOMETRIC DATA (MEASURED):



LG Innotek

LED LG 3030
FWHM 64.0 + 21.0°
Efficiency 94 %
Peak intensity 1.200 cd/lm
Required components:

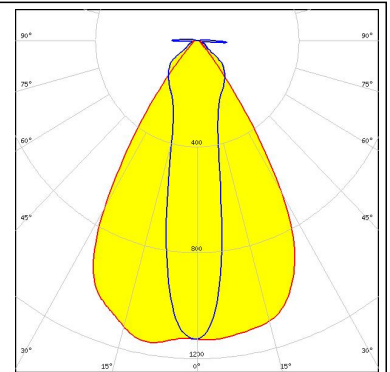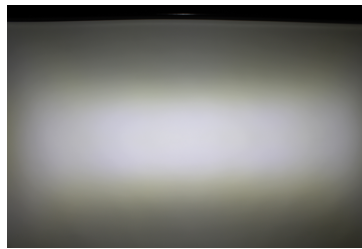



NICHIA

LED NFSx757D
FWHM 62.0 + 19.0°
Efficiency 94 %
Peak intensity 1.300 cd/lm
Required components:

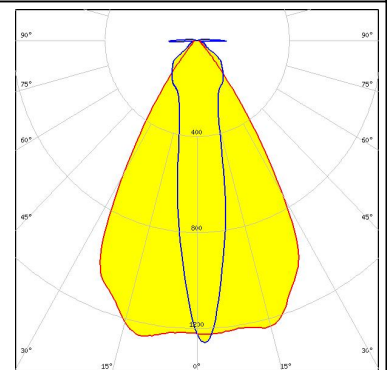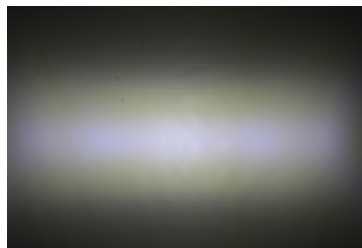



NICHIA

LED NFSx757G
FWHM 63.0 + 20.0°
Efficiency 94 %
Peak intensity 1.200 cd/lm
Required components:

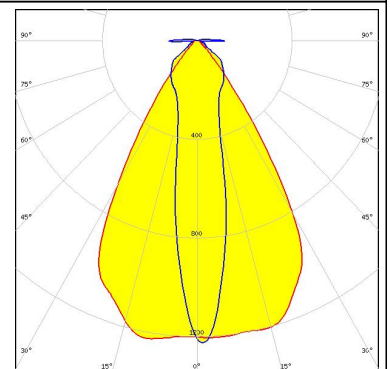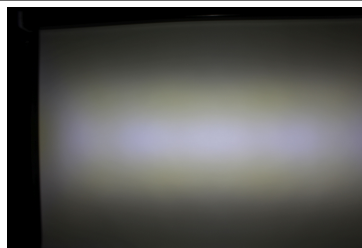

OSRAM


LED PrevaLED Brick DC 4x16
FWHM 64.0 + 20.0°
Efficiency 94 %
Peak intensity 1.300 cd/lm
Required components:

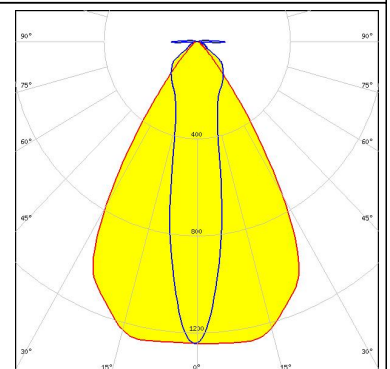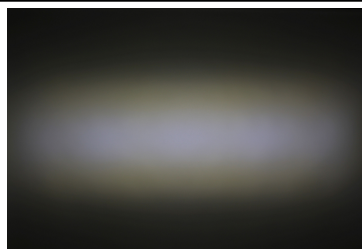

PHOTOMETRIC DATA (MEASURED):



OSRAM
Opto Semiconductors

LED Duris S5 (Single chip)
FWHM 62.0 + 17.0°
Efficiency 94 %
Peak intensity 1.400 cd/lm
Required components:

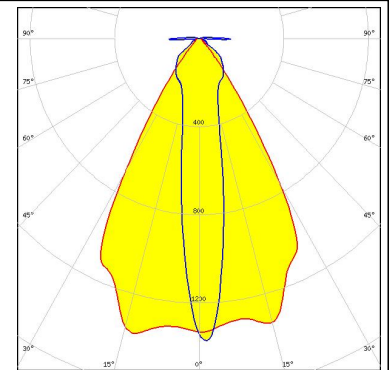



PHILIPS

LED Fortimo FastFlex LED 4x16 DHE G4
FWHM 63.0 + 20.0°
Efficiency 94 %
Peak intensity 1.300 cd/lm
Required components:

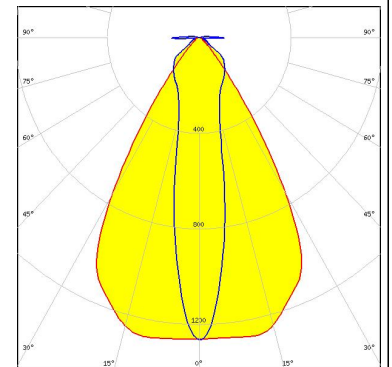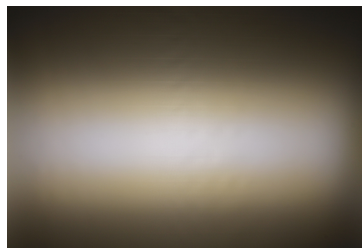



SAMSUNG

LED HiLOM RM64 (LM301B)
FWHM 64.0 + 20.0°
Efficiency 94 %
Peak intensity 1.300 cd/lm
Required components:

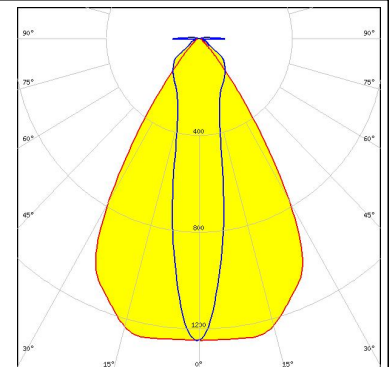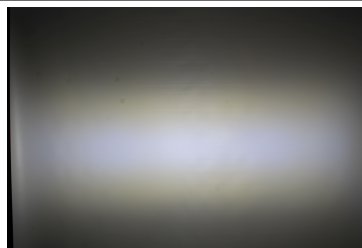



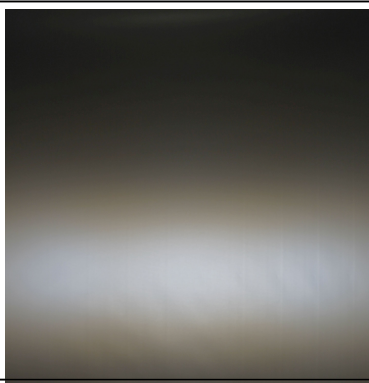
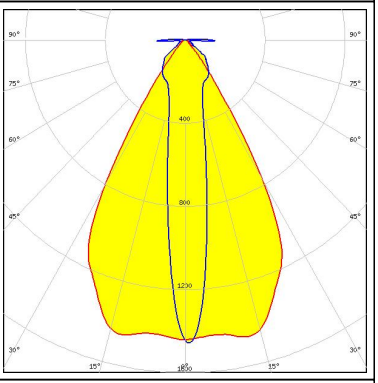

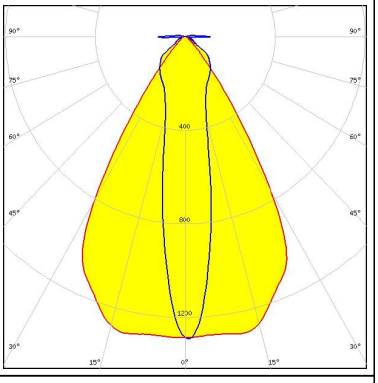


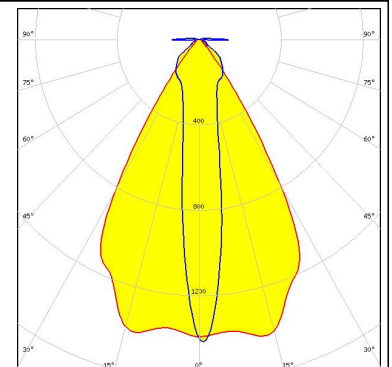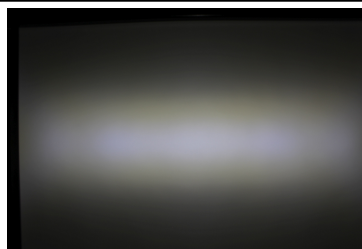

SAMSUNG

LED LM231 A/B
FWHM 62.0 + 15.0°
Efficiency 94 %
Peak intensity 1.400 cd/lm
Required components:

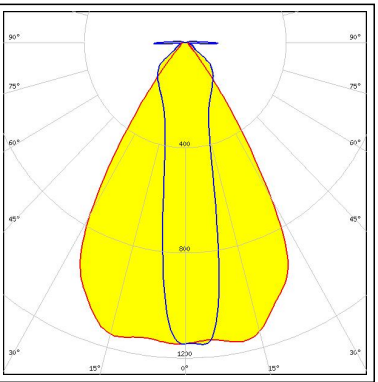


PHOTOMETRIC DATA (MEASURED):

<p> SEOUL SEMICONDUCTOR</p> <p>LED SEOUL 3030 FWHM 64.0 + 20.0° Efficiency 94 % Peak intensity 1.200 cd/lm Required components:</p>		
<p> SEOUL SEMICONDUCTOR</p> <p>LED SunLike 3030 FWHM 61.0 + 16.0° Efficiency 94 % Peak intensity 1.500 cd/lm Required components:</p>		
<p>TRIDONIC</p> <p>LED RLE 4x16 4000lm MP ADV2 OTD FWHM 64.0 + 19.0° Efficiency 94 % Peak intensity 1.300 cd/lm Required components:</p>		
<p>TRIDONIC</p> <p>LED RLE 4x8 2000lm MP ADV2 OTD FWHM 64.0 + 19.0° Efficiency 94 % Peak intensity 1.300 cd/lm Required components:</p>		


PHOTOMETRIC DATA (SIMULATED):




LED XP-G2
FWHM 71.0 + 20.0°
Efficiency 87 %
Peak intensity 1.200 cd/lm
Required components:

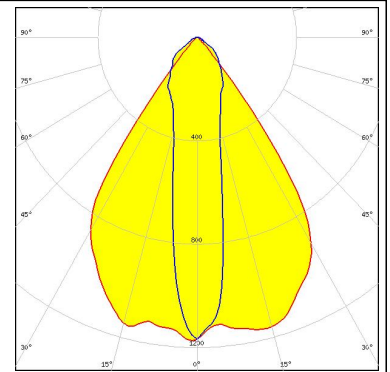


LED XP-G3
FWHM 70.0 + 25.0°
Efficiency 92 %
Peak intensity 0.960 cd/lm
Required components:

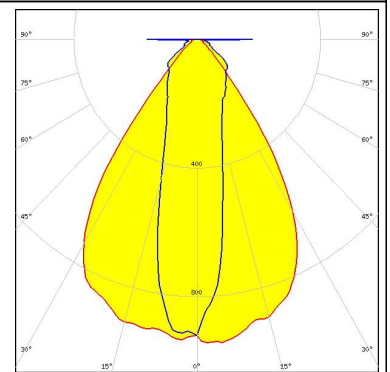

LED XT-E
FWHM 67.0 + 19.0°
Efficiency 87 %
Peak intensity 1.200 cd/lm
Required components:

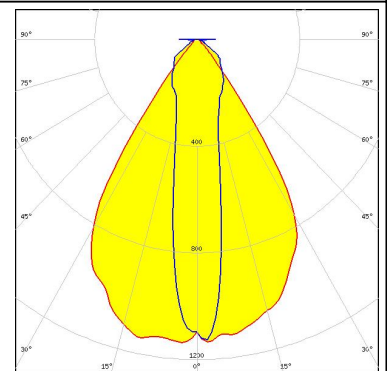


LED LUXEON 3030 2D (Round LES)
FWHM 50.0 + 16.0°
Efficiency 91 %
Peak intensity 1.500 cd/lm
Required components:

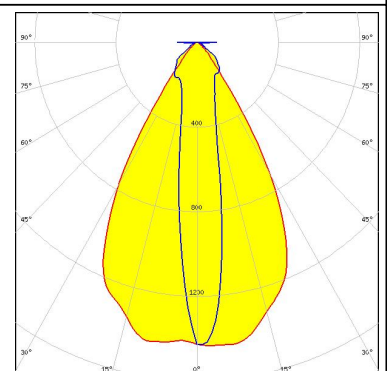


PHOTOMETRIC DATA (SIMULATED):




LED LUXEON CZ
FWHM 60.0 + 14.0°
Efficiency 94 %
Peak intensity 1.600 cd/lm
Required components:

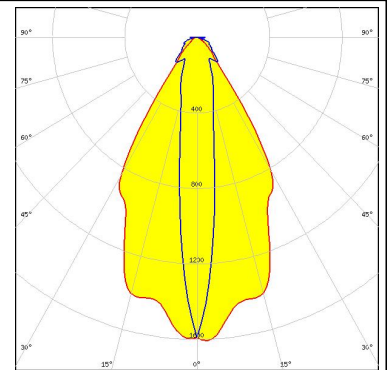

LED SFH 4725S
FWHM 56.0 + 14.0°
Efficiency 94 %
Peak intensity cd/lm
Required components:

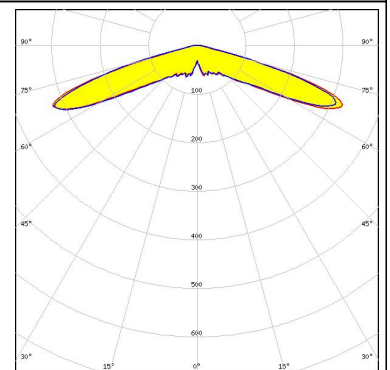

LED LM301B
FWHM 19.0 + 63.0°
Efficiency 93 %
Peak intensity 1.370 cd/lm
Required components:

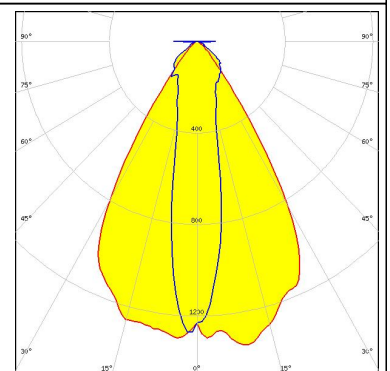

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Lenses](#) category:

Click to view products by [Ledil](#) manufacturer:

Other Similar products are found below :

[LL01ED-AK40L06](#) [LL01ZZ-EX25L06-M2](#) [180182-0000](#) [FNP-N2-N083-0R NRW](#) [LL01ED-ALI55R49](#) [0190535300](#) [0410111300](#)
[0510113303](#) [0530997](#) [2710121](#) [C11004_TINA2-RS](#) [C12231_LENA-FRESNEL-LENS](#) [LL01ED-AKY24R49](#) [LL01CR-AYG15R49](#)
[LL01CR-OT32L06-M2](#) [LL01ZZ-AAA24L49](#) [LL01CR-CEN38L02](#) [LL01ZZ-AAA55L49](#) [LL01CR-AYG24R49](#) [LL01A00CZMB2-M2](#)
[LL01ED-AKY38R49](#) [LL01CR-CNE2545L06-M2](#) [LL01ZZ-AAA38L49](#) [LL01ED-AKV36R49](#) [LL01ED-ALI24R49](#) [LL01CR-AYG38R49](#)
[FN15973_RONDA-REC-60-C](#) [FP-MS-11.5](#) [F16859_LINDA-ZT25](#) [C14169_LENA-CLEAR-LENS](#) [C16125_OLGA-W](#) [C17410_SPORT-](#)
[2X2-FT6](#) [C17414_SPORT-2X2-S6](#) [C17409_SPORT-2X2-FT6W](#) [C17360_SPORT-2X2-FT60](#) [C17434_ILONA-WW](#) [F16636_LINDA-W60](#)
[10003](#) [10003/15](#) [10048](#) [10049](#) [10108](#) [CP10960_RGBX-SS](#) [CP12395_LXP3-W](#) [10415](#) [10510](#) [1-1000288-0](#) [F14487_FLORENCE-1R-](#)
[MAXI-WG](#) [12667](#) [C14165_STRADA-2X2-ME-WIDE2](#)