


# ROHS-COMPLIANT

DVI\_D M  
PLASTIC:BLACK

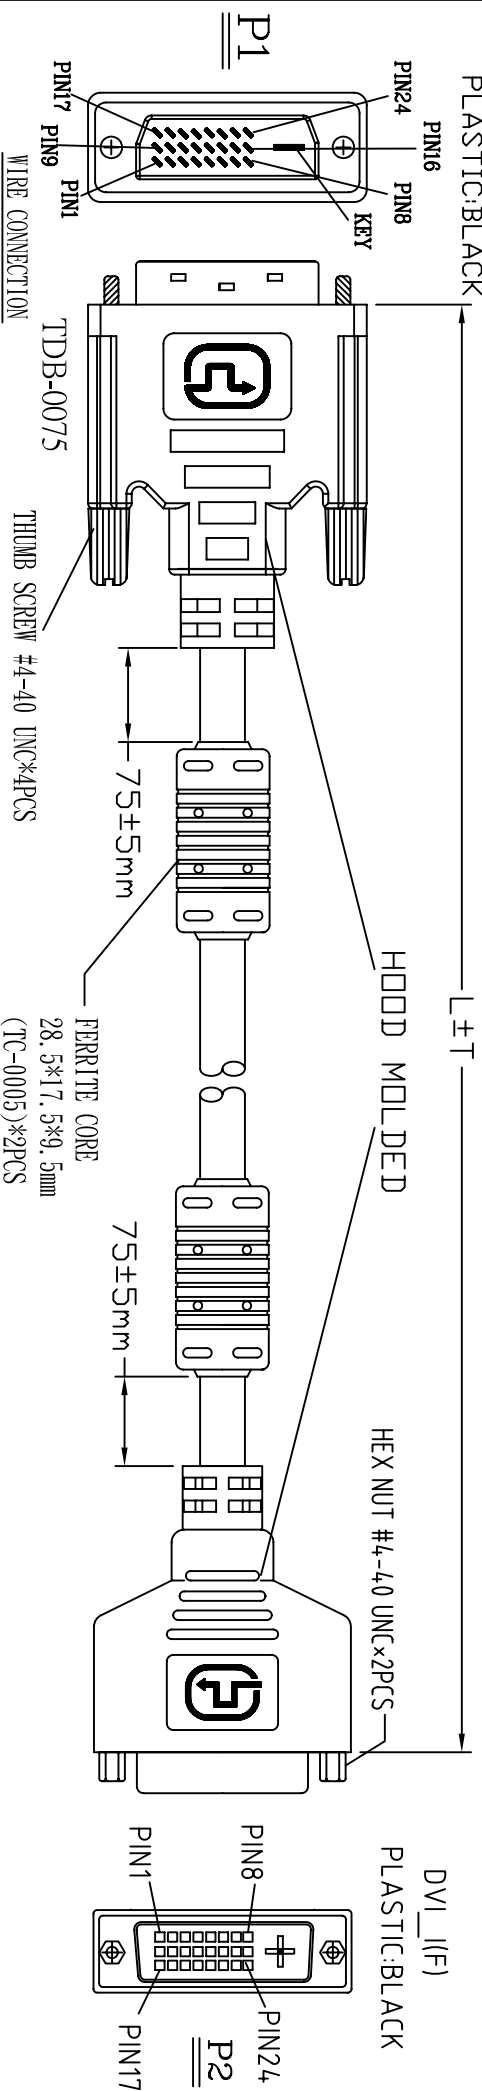

P1	WIRE COLOR	P2
1		1
2		2
3		3
3		3
4		4
5		5
6		6
7		7
9		9
10		10
11		11
11		11
12		12
13		13
14		14
15		15
16		16
17		17
18		18
19		19
19		19
20		20
21		21
22		22
23		23
24		24
SHELL	BRAID SHIELDS	SHELL

## REMARK:

- CABLE:UL-20276 [28AWG(7/0.127)\*1P+DRAIN WIRE+AL/MTLAR]\*7C+28AWG(7/0.127)\*1P+28AWG(7/0.127)\*3C+AL/MTLAR +DRAIN WIRE(7/0.127)+BRAID(85%)T.C PVC JACKET;OD: 8.6±0.15mm, COLOR:BLACK(NK-K01), **(C20276324-1)**
- CONNECTOR:  
P1:DVI\_D 25P: 24P+KEY MALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL.  
P2:DVI 24P+KEY DIGITAL ANALOG FEMALE CONTACT:G/F, NICKEL PLATED SHELL.  
3. SHIELD: P1&P2 COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE SHIELDING
- HOOD:  
P1&P2:MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)
- TEST REQUEST:  
(1) 100% SHORT OPEN & MIS WIRE TEST.  
(2) CONTACT RESISTANCE 3 OHMS MAX.  
(3) INSULATION RESISTANCE 10M OHMS MIN.  
(4) HI-POT VOLTAGE: 300V DC.
- PACKAGING: SEE P-0210, EACH PC / POLYBAG  
EAN CODE LABEL + ROHS LABEL


LTR	REV.	DESCRIPTION	DATE

200-0748-3	CD00006	10000	100	4260113564356
200-0748-2	CD00005	5000	50	4260113564349
200-0748-1	CD00004	3000	30	4260113564332
DWG	P/N	L (mm)	T (mm)	EAN CODE

Tolerance Inch	M/M	2DIREKT GMBH	
X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	
Draw	Title		
FANNIE 04/02/07'	DVI_D - DVI_I DUAL LINK CABLE		
Check	Customer P/N	App'd	Customer E-DIR
Engr	Scale NONE	Units m/m	Third Angle Projection
Dwg No. 200-0748	REV:A	Sheet 1/2	


LTR	REV.	DESCRIPTION	DATE

POLYBAG

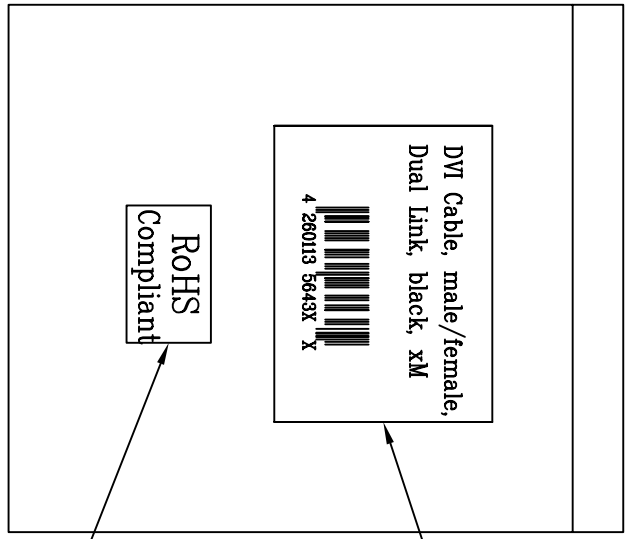

LABEL POSITION

WHITE BASE BLACK WORDS  
(L\*W= 35\*22mm)

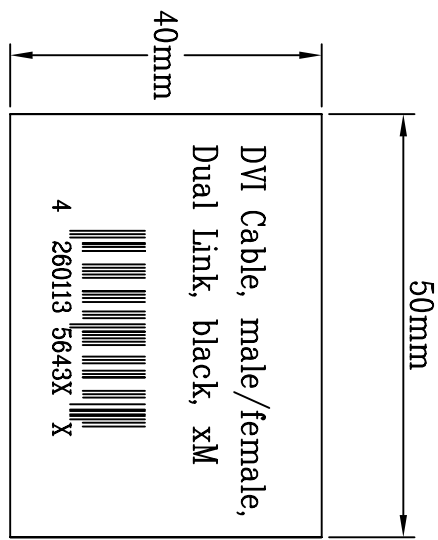

LABEL  
(#=CABLE LENGTH)

Tolerance Inch M/M		.30		<b>2DIREKT GMBH</b> Title DVI_D - DVI_I DUAL LINK CABLE Customer P/N
X	.015	.10	.30	
.XX	.010	.10	.30	
.XXX	.005	.05	.30	
Draw	FANNIE 04/02/07'			Customer P/N
Check	App'd	Customer	E-DIR	
Engr	Scale	NONE	Units	m/m
	Dwg No.	200-0748	REV	A
	Sheet	2/2		