








DEGSON ELECTRONICS CO., LTD.

Product Specification

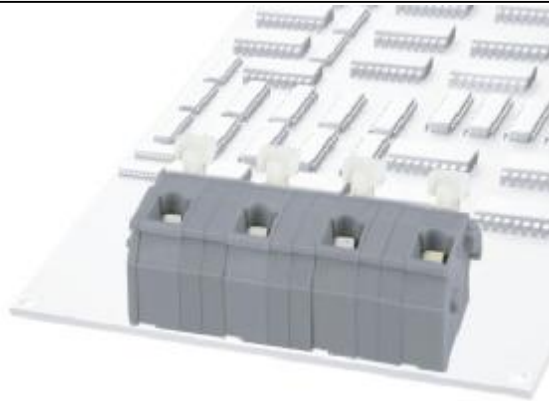


DG242V-10.0
DG242V-10.16

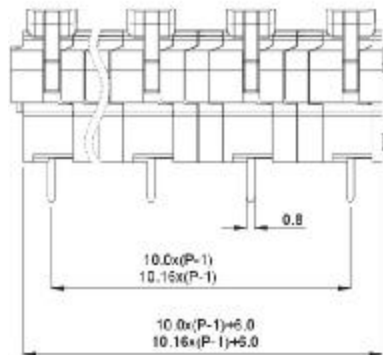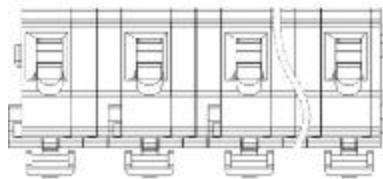

Approval		
Electrical		
Standard	UL	IEC
Rated voltage	300V	1000V
Rated current	15A	17A
Wire range	28-12AWG	0.2-2.5mm ²
Withstanding voltage	AC3500V/1Min	
Mechanical		
Ambient temperature	-40°C ~ +105 °C	
Strip length	5-6mm	
Dimensions		
Pitch	10.0mm (.394") 10.16 (.400")	
Poles	1P-XXP	
Material		
Housing	PA66, UL94V-0	
Pin header	Phosphor bronze, Tin plated	
Wire guard	Stainless steel	

HOW TO ORDER :

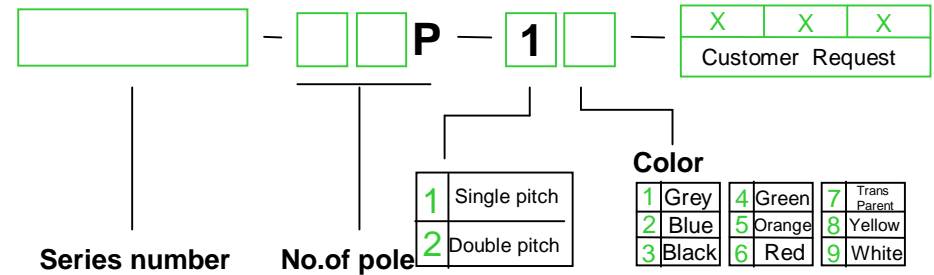

 mm (INCH)	 DEGSON ELECTRONICS CO., LTD.
 THIRD ANGLE PROJECTION	NAME DG242V-10.0, DG242V-10.16