

# 1 $\phi$ 3 $\phi$ 1000A AC Power Clamp Meter

**Measures Current, Insulation Resistance, Temperature (Type K) and Power**


*Including True Power, Apparent Power, and Reactive Power*

## 380976-K Features:

- Large dual LCD display (9999 count)
- Measures 1 $\phi$ /3 $\phi$  True Power (kW), Apparent Power (kVA), and Reactive Power (kVAR), plus Horsepower (HP), Power Factor, and Phase Angle with Lead/Lag indicator
- AC+DC  $\mu$ A current with 10nA resolution for flame rod tests
- Max/Min recording with elapsed time indication
- Auto Detect AC/DC Voltage measurements with simultaneous frequency display
- Capacitance to 7000 $\mu$ F with 0.001 $\mu$ F resolution
- High Resistance tests to 100M $\Omega$
- Type K,  $^{\circ}$ C/ $^{\circ}$ F switchable, temperature to 1000 $^{\circ}$ F
- Diode and Continuity tests
- Auto power off with disable feature
- 1.6" (40mm) clamp jaw opening
- Test Lead Kit includes: two CAT IV-600V 72" (1.8m) lead extensions with right angle and straight end shrouded banana plugs; two modular test probe handles with stainless steel tips; two plunger activated retractable jaw clips; two extra large alligator clips
- Complete with test lead kit, general purpose Type K thermocouple probe, carrying case, and 9V battery

## Applications:

- AC Power evaluation
- Motor/Generator installation and repair
- HVAC flame rod tests
- Capture max/min temperature or current values
- Category III rating for industrial measurements

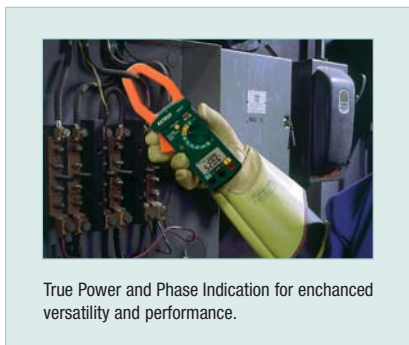

True Power and Phase Indication for enhanced versatility and performance.

Function	Max Range / Resolution	Basic Accuracy
True Power (W):	600kW / 10W	$\pm 5\%$
Apparent Power(kVA):	600kVA / 100VA	$\pm 2\%$
Reactive Power (kVAR)	600kVAR/10VAR	$\pm 5\%$
Horsepower (HP)	800HP/0.01HP	$\pm 5\%$
Phase Angle ( $^{\circ}$ ):	-60 to +60 $^{\circ}$ / 0.1 $^{\circ}$	$\pm 6^{\circ}$
AC Current: (Trms):	1000A / 10mA	$\pm 2\%$
$\mu$ A Current (AC+DC) (Trms):	1000 $\mu$ A / 10nA	$\pm 1\%$
AC/DC Voltage: (Trms):	600V / 0.1mV	$\pm 1\%$
Resistance ( $\Omega$ ):	1000k $\Omega$ / 0.1 $\Omega$	$\pm 1\%$
Resistance (M $\Omega$ ):	100M $\Omega$ / 1k $\Omega$	$\pm 5\%$
Capacitance:	7000 $\mu$ F / 1nF	$\pm 1.5\%$
Frequency:	40Hz to 1kHz / 0.1Hz	$\pm 0.5\%$
Temperature (Type K):	-58 to 1000 $^{\circ}$ F / 0.1 $^{\circ}$ F -50 to 900 $^{\circ}$ C / 0.1 $^{\circ}$ C	$\pm 1\%$ $\pm 1\%$
Dimensions:	9 x 3 x 1.6" (228 x 76 x 39mm)	
Weight:	16.4oz (465g)	

## Ordering Information:

380976-K.....3-Phase True RMS Power Clamp Meter Kit  
380976-K-NIST .....380976-K w/ Calibration Traceable to NIST Standards  
480172.....AC Line Splitter



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Clamp Multimeters & Accessories](#) category:*

*Click to view products by [Extech](#) manufacturer:*

Other Similar products are found below :

[I800](#) [FLUKE 1630-2](#) [ZAPDUMOD-03](#) [ZARKMS-01-99](#) [UT233](#) [TESTO 770-3](#) [0590 7703](#) [AX-3550](#) [AX-M266C](#) [BM079](#) [BM089](#) [BM157](#)  
[BM162](#) [BM197](#) [KEW2210R](#) [FLUKE 80I-110S](#) [FLUKE I200](#) [FLUKE I200S](#) [FLUKE I3000FLEX-24](#) [FLUKE I310S](#) [FLUKE I400](#) [CIE600](#)  
[TESTO 770-2](#) [0590 7702](#) [34194A](#) [KEW2433R](#) [KEW8112](#) [FLUKE 772](#) [380976-K](#) [MA3110](#) [MA440](#) [MA443](#) [MA445](#) [FLUKE-374 FC](#)  
[TA74](#) [AMP-320](#) [CM55](#) [CM46](#) [I200](#) [ACD-6 PRO](#) [FLUKE-1630-2FC](#) [I410](#) [CM44](#) [CM42](#) [FLK-A3000 FC](#) [FLUKE-376 FC](#) [ACD-14-PRO](#)  
[MA610](#) [F201](#) [F205](#) [MA193 \(250 MM\)](#) [DIGIFLEX 4000A 350MM](#)