
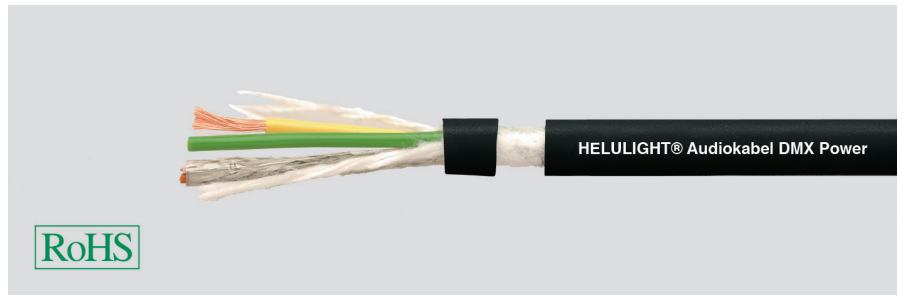


Light+Power

DMX-POWER

HELULIGHT®



Type

Cable structure

Conductor material:
Core insulation:
Core colours:
Stranding element:
Sheath material:
Cable external diameter:
Sheath colour:

DMX cables

(1x2x0,24)+2x1,0

Copper, bare
Foam-Skin-PE (DMX), PVC (Power)
red, white (DMX); yellow, green (Power)
2 cores with 1 filler
PVC soft
approx. 7,4 mm
black matt

Electrical data

Characteristic impedance: 110 Ohm

Technical data

Weight: approx. 74 kg/km
Copper weight: 36,0 kg/km

Part no.

400081

Dimensions and specifications may be changed without prior notice.

Application

The hybrid DMX Power cable is used in the professional DMX light controller. It transmits power for the light and control signals for the movement. The cable is compact, flexible and easy to process.