

NTE1911

3 Terminal Adjustable Negative Voltage Regulator

-1.2V to -37V, 1.5A

Description:

The NTE1911 is an adjustable 3-terminal negative voltage regulator capable of supplying in excess of 1.5A over an output voltage range of -1.2V to 37V. This regulator is exceptionally easy to apply, requiring only 2 external resistors to set the output voltage and 1 output capacitor for frequency compensation. The circuit design has been optimized for excellent regulation and low thermal transients. Further, it features internal current limiting, thermal shutdown and safe-area compensation, making the, virtually blowout-proof against overloads.

The NTE1911 serves a wide variety of applications including local on-card regulation, programmable-output voltage regulation or precision current regulation.

Features:

- Output Voltage Adjustable from -1.2V to -37V
- 1.5A Output Current Guaranteed, -55°C to +150°C
- Line Regulation Typically 0.01%/V
- Load Regulation Typically 0.3%
- Excellent Thermal Regulation, 0.002%/W
- 77dB Ripple Rejection
- Excellent Rejection of Thermal Transients
- 50ppm/°C Temperature Coefficient
- Temperature-Independent Current Limit
- Internal Thermal Overload Protection

Absolute Maximum Ratings:

Power Dissipation, P_D 20W
 Input-Output Voltage Differential, V_{I-O} 40V
 Operating Junction Temperature Range, T_J 0° to +125°C
 Storage Temperature Range, T_{stg} -65° to +150°C
 Lead Temperature (Soldering, 10 sec), T_L 300°C

Electrical Characteristics: (Note 1)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Line Regulation	Reg_{line}	$T_A = +25^\circ C, 3V \leq V_I - V_O \leq 40V, \text{ Note 2}$	-	0.01	0.04	%/V
		$3V \leq V_I - V_O \leq 40V, \text{ Note 2}$	-	0.02	0.07	%/V

Note 1. Unless otherwise noted, these specifications apply: $0^\circ \leq T_J \leq +125^\circ C$, $(V_I - V_O) = 5V$, $P_{max} = 20W$, and $I_{MAX} = 1.5A$.

Note 2. Load and line regulation are specified at constant junction temperature. Pulse testing with a low duty cycle is used. Change in V_O because of heating effects is covered under the Thermal Regulation specification.


Electrical Characteristics (Cont'd): (Note 1)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit	
Load Regulation	Reg _{load}	$V_O \leq 5V$, Note 2	$T_A = +25^\circ C$, $10mA \leq I_O \leq 1.5A$	–	15	50	mV
			$10mA \leq I_O \leq 3A$	–	20	70	mV
		$V_O \geq 5V$, Note 2	$T_A = +25^\circ C$, $10mA \leq I_O \leq 1.5A$	–	0.3	1.0	%
			$10mA \leq I_O \leq 3A$	–	0.3	1.5	%
Thermal Regulation	Reg _{therm}	$T_A = +25^\circ C$, Pulse = 10ms	–	0.003	0.04	%V _O /W	
Adjustment Pin Current	I _{Adj}		–	65	100	μA	
Adjustment Pin Current Change	ΔI _{Adj}	$T_A = +25^\circ C$, $10mA \leq I_L \leq 1.5A$, $2.5V \leq (V_I - V_O) \leq 40V$, $P \leq 20W$	–	0.2	5.0	μA	
Reference Voltage	V _{ref}	$10mA \leq I_O \leq 1.5A$, $3V \leq (V_I - V_O) \leq 40V$, $P \leq 20W$, $T_A = +25^\circ C$, Note 3	1.20	1.25	1.30	V	
		$10mA \leq I_O \leq 1.5A$, $3V \leq (V_I - V_O) \leq 40V$, $P \leq 20W$, Note 3	1.213	1.250	1.287	V	
Temperature Stability	T _S	$0^\circ \leq T_J \leq +125^\circ C$	–	0.6	–	%V _O	
Minimum Load Current	I _{Lmin}	$V_I - V_O \leq 10V$	–	1.5	6.0	mA	
		$V_I - V_O \leq 40V$	–	2.5	10	mA	
Maximum Output Current Limit	I _{max}	$V_I - V_O \leq 15V$, $P \leq 20W$	1.5	2.2	–	A	
		$V_I - V_O \leq 40V$, $P \leq 20W$, $T_A = +25^\circ C$	0.15	0.4	–	A	
RMS Noise, % of V _O	N	$T_A = +25^\circ C$, $10Hz \leq f \leq 10kHz$	–	0.003	–	%V _O	
Ripple Rejection Ratio	RR	$V_O = 10V$, $f = 120Hz$, $C_{Adj} = 0$	–	60	–	dB	
		$V_O = 10V$, $f = 120Hz$, $C_{Adj} = 10\mu F$	66	77	–	dB	
Long Term Stability	S	$T_A = +125^\circ C$, 1000 Hours	–	0.3	1.0	%/1.0k	

Note 1. Unless otherwise noted, these specifications apply: $0^\circ \leq T_J \leq +125^\circ C$, $(V_I - V_O) = 5V$, $P_{max} = 20W$, and $I_{MAX} = 1.5A$.

Note 2. Load and line regulation are specified at constant junction temperature. Pulse testing with a low duty cycle is used. Change in V_O because of heating effects is covered under the Thermal Regulation specification.

Note 3. C_{Adj}, when used, is connected between the adjustment pin and GND.

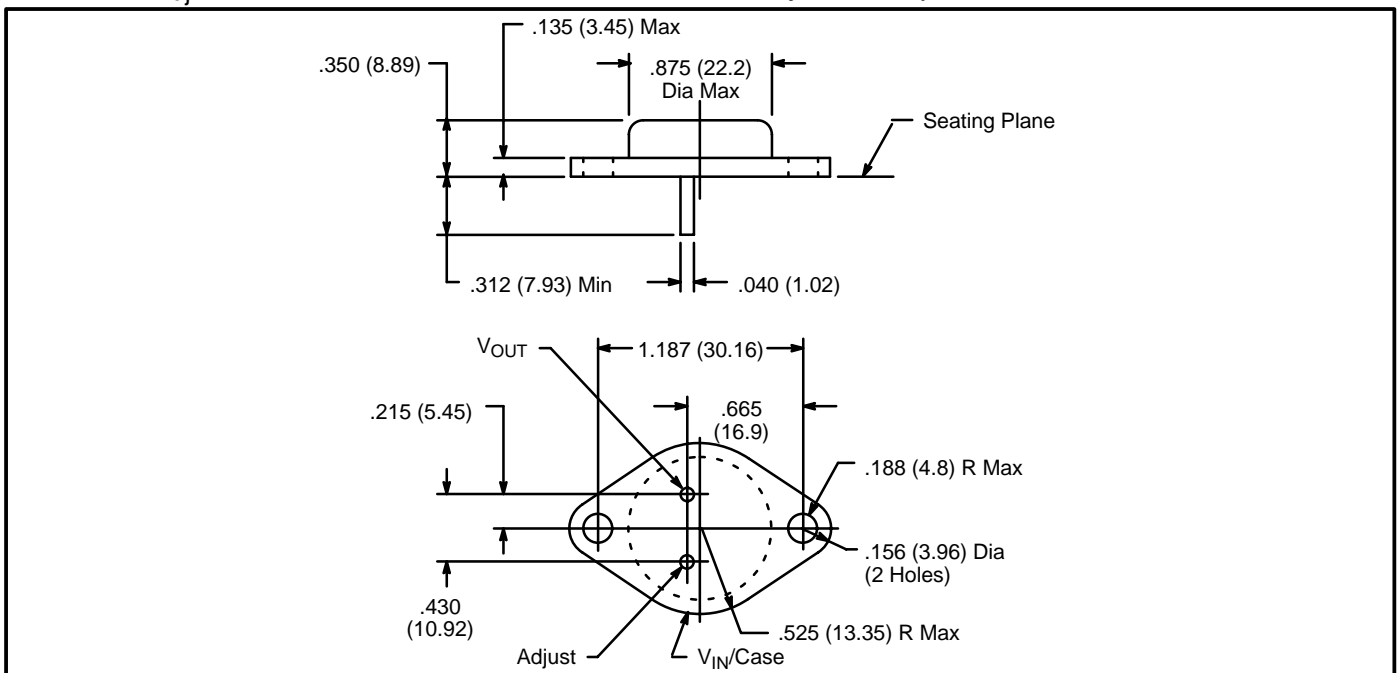

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [NTE](#) manufacturer:

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MAX202ECWE-LF](#) [MCDTSA6-2R](#) [L4953G](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#)
[TCR3DF13,LM\(CT](#) [TCR3DF39,LM\(CT](#) [TLE42794G](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [L78MR05-E](#) [033150D](#) [033151B](#) [090756R](#)
[636416C](#) [NCV78M15BDTG](#) [702482B](#) [714954EB](#) [TLE42794GM](#) [TLE42994GM](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#)
[NCV78M05ABDTRKG](#) [NCV78M08BDTRKG](#) [NCP7808TG](#) [NCV571SN12T1G](#) [LV5680P-E](#) [CAJ24C256YI-GT3](#) [L78M15CV-DG](#) [L9474N](#)
[TLS202B1MBV33HTSA1](#) [L79M05T-E](#) [NCP571SN09T1G](#) [MAX15006AASA/V+](#) [MIC5283-5.0YML-T5](#) [L4969URTR-E](#) [L78LR05D-MA-E](#)
[NCV7808BDTRKG](#) [L9466N](#) [NCP7805ETG](#) [SC7812CTG](#) [NCV7809BTG](#) [NCV571SN09T1G](#) [NCV317MBTG](#) [MC78M15CDTT5G](#)
[MC78M12CDTT5G](#) [L9468N](#)