



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089

NTE1913 Integrated Circuit Negative 3 Terminal Voltage Regulator, -5V, 1.5A

Description:

The NTE1913 is a 3 terminal fixed negative voltage regulator in a TO3 type package suitable for numerous applications requiring up to 1.5A. This device employs internal current limiting safe area protection and thermal shutdown for protection against virtually all overload conditions.

Low ground pin current allows output voltage to be easily boosted above the preset value with a resistor divider. The low quiescent current drain of the NTE1913 with a specified maximum change with line and load ensures good regulation in the voltages boosted mode.

Features:

- Thermal, Short Circuit, and Safe Area Protection
- High Ripple Rejection
- 4% Preset Output Voltage

Absolute Maximum Ratings:


Input Voltage, V_{IN}	-35V
Input-Output Differential, $V_{IN}-V_O$	25V
Power Dissipation (Note 1), P_D	Internally Limited
Operating Junction Temperature Range, T_J	0° to +125°C
Storage Temperature Range, T_{stg}	-65° to +150°C
Lead Temperature (During Soldering, 10sec Max), T_L	+230°C

Note 1. Thermal resistance, junction-to-ambient is +50°C/W (no heat sink) and +5°C/W (infinite heat sink).

Electrical Characteristics: ($0^{\circ} \leq T_J \leq +125^{\circ}\text{C}$, $P_D \leq 1.5\text{W}$, $V_O = -5\text{V}$, $V_{IN} = -10\text{V}$, $I_O = 500\text{mA}$, $C_{IN} = 2.2\mu\text{F}$, $C_{OUT} = 1\mu\text{F}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	V_O	$T_J = +25^{\circ}\text{C}$	-4.8	-5.0	-5.2	V
		$-20\text{V} \leq V_{IN} \leq -7.5\text{V}$, $5\text{mA} \leq I_O \leq 1\text{A}$, $P \leq 15\text{W}$	-7.45	-5.00	-5.25	V
Line Regulation	Reg_{Line}	$T_J = +25^{\circ}\text{C}$, $-25\text{V} \leq V_{IN} \leq -7\text{V}$, Note 2	-	8	50	mV
		$T_J = +25^{\circ}\text{C}$, $-12\text{V} \leq V_{IN} \leq -8\text{V}$, Note 2	-	2	15	mV
Load Regulation	Reg_{Load}	$T_J = +25^{\circ}\text{C}$, $5\text{mA} \leq I_O \leq 1.5\text{A}$, Note 2	-	15	100	mV
		$T_J = +25^{\circ}\text{C}$, $250\text{mA} \leq I_O \leq 750\text{mA}$, Note 2	-	5	50	mV
Quiescent Current	I_Q	$T_J = +25^{\circ}\text{C}$	-	1	2	mA
Quiescent Current Line	$I_{Q(\text{Line})}$	$-25\text{V} \leq V_{IN} \leq -7\text{V}$	-	-	0.5	mA
Quiescent Current Load	$I_{Q(\text{Load})}$	$5\text{mA} \leq I_O \leq 1.5\text{A}$	-	-	0.5	mA
Output Noise Voltage	V_N	$T_A = +25^{\circ}\text{C}$, $f = 10\text{Hz}$ to 100Hz	-	125	-	μV
Ripple Rejection	RR	$-18\text{V} \leq V_{IN} \leq -8\text{V}$, $f = 120\text{Hz}$	54	66	-	dB
Dropout Voltage		$T_J = +25^{\circ}\text{C}$, $I_O = 1\text{A}$	-	1.1	-	V
peak Output Current	$I_{O\text{max}}$	$T_J = +25^{\circ}\text{C}$	-	2.2	-	A
Temperature Coefficient		$0^{\circ} \leq T_J \leq +100^{\circ}\text{C}$, $I_O = 5\text{mA}$	-	0.4	-	$\text{mV}/^{\circ}\text{C}$

Note 2. Regulation is measured at a constant temperature by pulse testing with a low duty cycle. Change in output voltage due to heating effects must be taken into account.

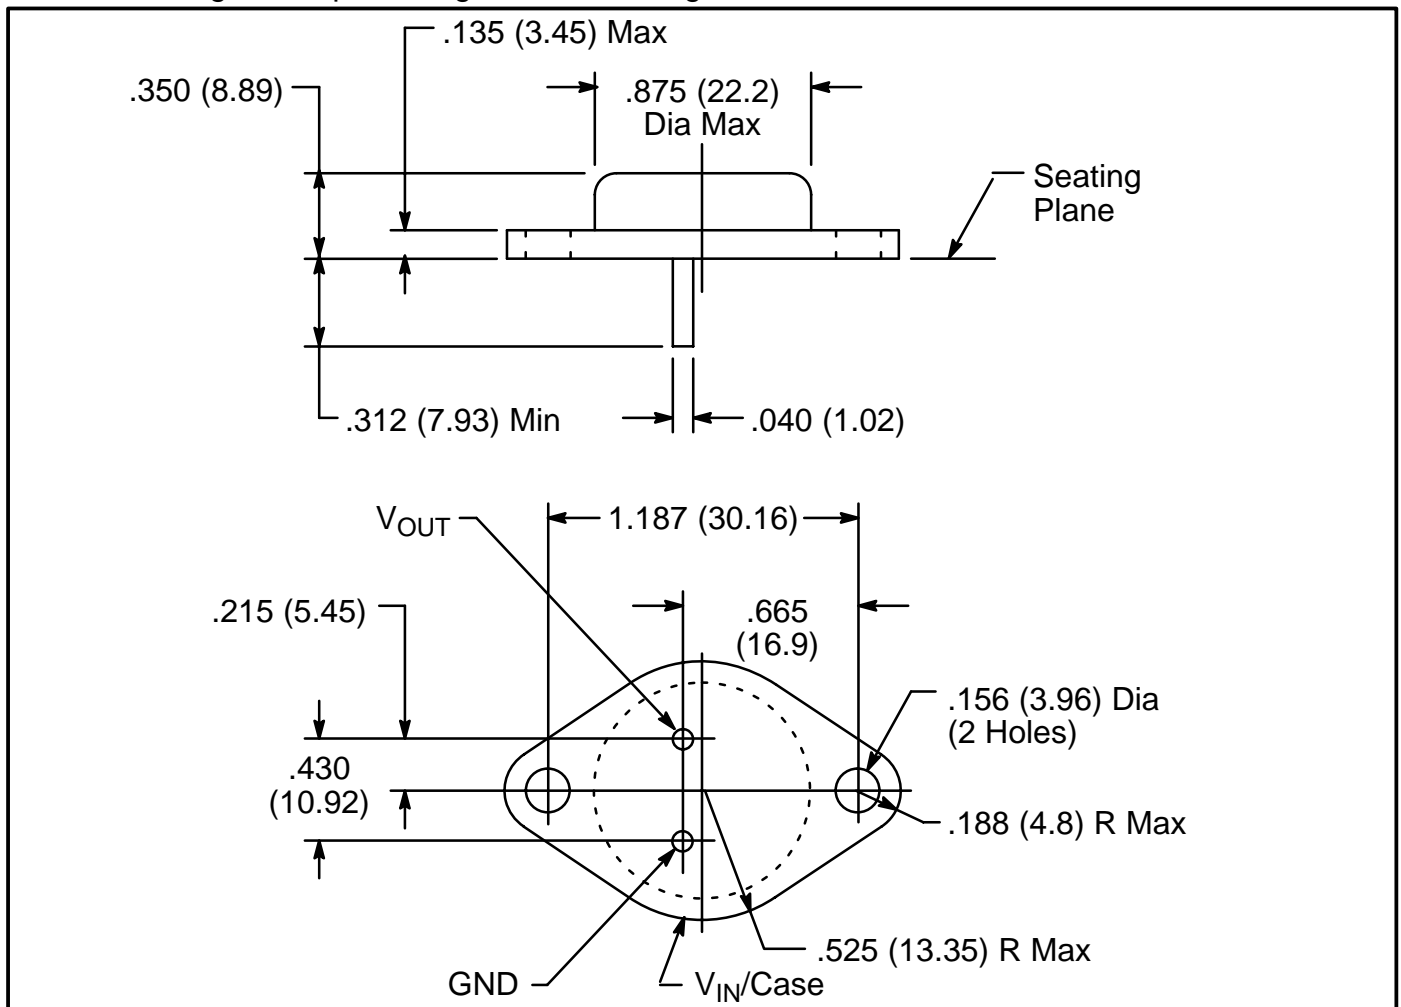

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MAX202ECWE-LF](#) [MCDTSA6-2R](#) [L4953G](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#)
[TCR3DF13,LM\(CT](#) [TCR3DF39,LM\(CT](#) [TLE42794G](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [L78MR05-E](#) [033150D](#) [033151B](#) [090756R](#)
[636416C](#) [NCV78M15BDTG](#) [702482B](#) [714954EB](#) [TLE42794GM](#) [TLE42994GM](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#)
[NCV78M05ABDTRKG](#) [NCV78M08BDTRKG](#) [NCP7808TG](#) [NCV571SN12T1G](#) [LV5680P-E](#) [CAJ24C256YI-GT3](#) [L78M15CV-DG](#) [L9474N](#)
[TLS202B1MBV33HTSA1](#) [L79M05T-E](#) [NCP571SN09T1G](#) [MAX15006AASA/V+](#) [MIC5283-5.0YML-T5](#) [L4969URTR-E](#) [L78LR05D-MA-E](#)
[NCV7808BDTRKG](#) [L9466N](#) [NCP7805ETG](#) [SC7812CTG](#) [NCV7809BTG](#) [NCV571SN09T1G](#) [NCV317MBTG](#) [MC78M15CDTT5G](#)
[MC78M12CDTT5G](#) [L9468N](#)