



## NTE1956 Integrated Circuit Positive 3 Terminal Voltage Regulator, Low Dropout Voltage, 24V, 1A

### Description:

The NTE1956 is a positive voltage regulator in a TO220 type package with a low input/output voltage. This device is suitable for low-voltage, battery-driven equipment, and home appliances and industrial equipment with great fluctuation of the supply voltage.

### Features:

- Minimum Input/Output Voltage Difference: 0.5V Typ
- On-Chip Overcurrent Limiter
- On-Chip Thermal Protection Circuit
- On-Chip Inrush Current Protection Circuit at the time of Input Voltage Start-Up
- On-Chip Input Short-Circuit Protection Circuit (When the Input Pin is Short-Circuited to the Ground, the Circuit Between Pin1 and Pin3 is Shut Down to Prevent Current Flow)

### Applications:

- Power Supply Equipment

### Absolute Maximum Ratings: ( $T_A = +25^\circ\text{C}$ unless otherwise specified)

Supply Voltage (Note 1), $V_{IN}$ .....	30V
Supply Current (Note 2), $I_{IN}$ .....	2.4A
Power Dissipation (Note 3), $P_D$ .....	15W
Operating Ambient Temperature Range, $T_{opr}$ .....	-30° to +85°C
Storage Junction Temperature Range, $T_{stg}$ .....	-55° to +150°C
Thermal Resistance, Junction-to-Ambient, $R_{thJA}$ .....	65°C/W
Thermal Resistance, Junction-to-Case, $R_{thJC}$ .....	5°C/W

Note 1. At the application of  $V_{IN} = 30V$ , the overvoltage protection may be operated by the ASO protection circuit, leading to the output shut down.

Note 2. The current value does not exceed this criterion because of the on-chip current limiter.

Note 3. The internal circuit shuts off the output when  $T_J \leq +150^\circ\text{C}$  (design value).

### Recommended Operating Conditions: ( $I_O = 500\text{mA}$ , $T_A = +25^\circ\text{C}$ unless otherwise specified)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Operating Supply Voltage Range	$V_{IN}$		21.5	-	29.5	V

**Electrical Characteristics:** ( $V_{IN} = 25.5V$ ,  $I_O = 500mA$ ,  $T_A = +25^\circ C$  unless otherwise specified)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage	$V_{OUT}$	$T_J = +25^\circ C$		23.28	24.0	24.72	V
Line Regulation	$REG_{IN}$	$V_{IN} = 25.5V$ to $29.5V$ , $T_J = +25^\circ C$		—	9.6	96	mV
Load Regulation	$REG_{LOA}$	$V_{IN} = 25.5V$ , $I_O = 0$ to $1200mA$ , $T_J = +25^\circ C$		—	120	480	mV
Input Dependency of Bias Current	$\Delta I_{Bias(IN)}$	$V_{IN} = 25.5V$ to $29.5V$ , $T_J = +25^\circ C$		—	1	10	mA
Load Dependency of Bias Current	$\Delta I_{Bias(LOA)}$	$I_O = 0$ to $1200mA$ , $T_J = +25^\circ C$		—	10	50	mA
Bias Current at No Load	$I_{Bias}$	$I_O = 0mA$		—	2.6	5.0	mA
Bias Current Before the Regulation Starts	$I_{rush}$	$V_{IN} = 21.6V$ , $I_O = 0mA$		—	3	5	mA
Minimum I/O Voltage Difference	$V_{DIF(min)}$	$V_{IN} = 21.6V$ , $T_J = +25^\circ C$	$I_O = 500mA$	—	0.4	0.6	V
			$I_O = 1200mA$	—	0.5	1.0	V
Peak Output Current	$I_{O(Peak)}$	$V_{IN} = 25.5V$ , $T_J = +25^\circ C$ , Note 4		1.2	1.8	2.4	A
Ripple Rejection Ratio	RR	$V_{IN} = 25.5V$ to $27.5V$ , $I_O = 100mA$ , $f = 120Hz$		36	56	—	dB
<b>Design Reference Data (Note 5)</b>							
Output Short-Circuit Current	$I_{O(Short)}$	$V_{IN} = 30V$ , $T_J = +25^\circ C$ , Shorted Load		—	10	—	mA
Thermal Protection Operating Temperature	$T_{J(TH)}$	$V_{IN} = 25.5V$		—	150	—	°C
Output Voltage Temperature Coefficient	a	$T_J = +25^\circ$ to $+125^\circ C$		—	-40	—	ppm/°C

Note 4. This current exceeds  $P_{Dmax}$  because it is a parameter during abnormal (overcurrent) operation.

Note 5. The characteristic listed are theoretical values based on the IC design and are not guaranteed.

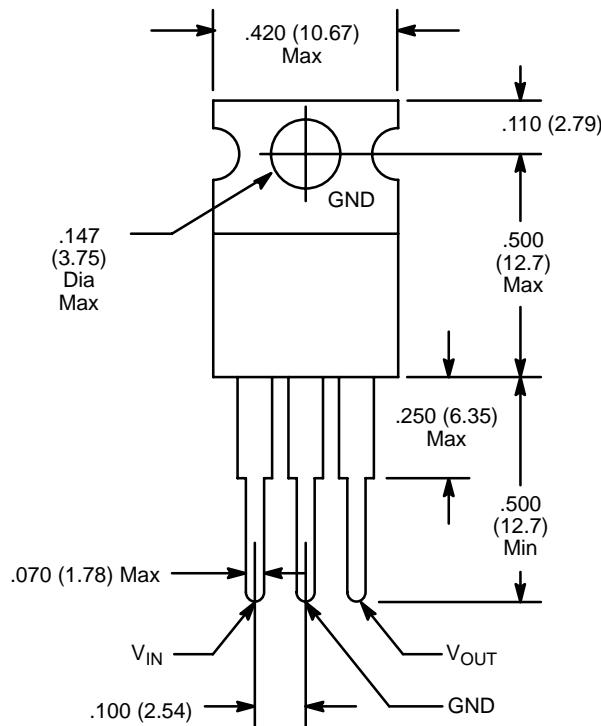

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for LDO Voltage Regulators category:***

***Click to view products by NTE manufacturer:***

Other Similar products are found below :

[M38D29FFHP#U1](#) [702103A](#) [717726C](#) [742457H](#) [MP20051DN-LF-Z](#) [R5F111PGGFB#30](#) [AP7363-SP-13](#) [NCP103AMX285TCG](#)  
[NCV8664CST33T3G](#) [NCV8752AMX28TCG](#) [L9454](#) [AP7362-HA-7](#) [LX13043CLD](#) [TCR3DF185,LM\(CT](#) [TCR3DF24,LM\(CT](#)  
[TCR3DF285,LM\(CT](#) [TCR3DF31,LM\(CT](#) [TCR3DF45,LM\(CT](#) [TLF4949EJ](#) [MP2013GQ-33-Z](#) [L9708](#) [L970813TR](#) [030014BB](#) [059985X](#)  
[NCP121AMX173TCG](#) [NCP4687DH15T1G](#) [NCV8703MX30TCG](#) [701326R](#) [702087BB](#) [755078E](#) [TCR2EN28,LF\(S](#) [LM1117DT-1.8/NO](#)  
[LT1086CM#TRPBF](#) [AZ1085S2-1.5TRE1](#) [MAX15101EWL+T](#) [NCV8170AXV250T2G](#) [SCD337BTG](#) [TCR3DF27,LM\(CT](#)  
[TCR3DF19,LM\(CT](#) [TCR3DF125,LM\(CT](#) [TCR2EN18,LF\(S](#) [MAX15103EWL+T](#) [TS2937CZ-5.0 C0](#) [MAX8878EUK30-T](#) [MAX663CPA](#)  
[NCV4269CPD50R2G](#) [NCV8716MT30TBG](#) [AZ1117IH-1.2TRG1](#) [MP2013GQ-P](#) [AP2112R5A-3.3TRG1](#)