


PCI-1735U PCI-1737U PCI-1739U

64-ch Digital I/O and Counter
Universal PCI Card

24-ch Digital I/O Universal PCI Card

48-ch Digital I/O Universal PCI Card

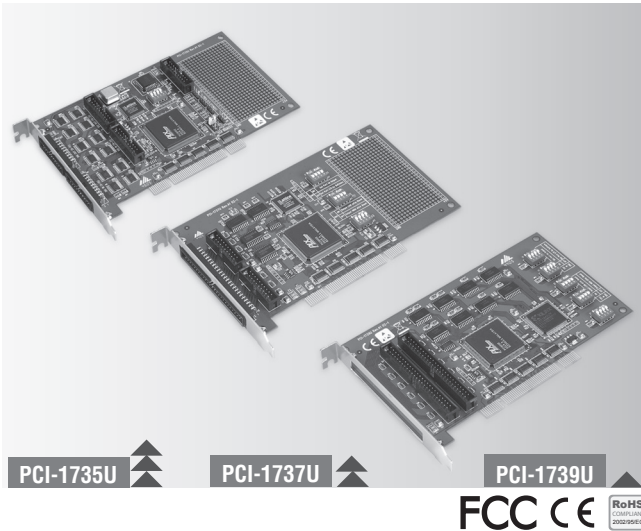

Features

- ISA-Compatible with PCL-720+ (PCI-1735U), PCL-724 (PCI-1737U) and PCL-731 (PCI-1739U)
- TTL-level digital input and output compatibility
- Emulates mode 0 of 8255 PPI (PCI-1737U and PCI-1739U)
- Interrupt handling capability (PCI-1737U and PCI-1739U)
- Output status readback (PCI-1737U and PCI-1739U)
- 3 programmable counter/timer channels and User configurable clock source (PCI-1735U)
- Breadboard area for custom circuits (PCI-1735U and PCI-1739U)
- PCI universal card

Specifications

Digital Input

- **Channels** PCI-1735U: 32
PCI-1737U: 24 (shared with output)
PCI-1739U: 48 (shared with output)
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.
Logic 1: 2.0 V min.
- **Interrupt Capable Ch.** PCI-1737U: 1
PCI-1739U: 2

Digital Output

- **Channels** PCI-1735U: 32
PCI-1737U: 24 (shared with input)
PCI-1739U: 48 (shared with input)
- **Compatibility** 5 V/TTL
- **Output Voltage** PCI-1735U: Logic 0: 0.5 V max.
Logic 1: 2.0 V min.
PCI-1737U/1739U: Logic 0: 0.4 V max.
Logic 1: 2.4 V min.
- **Output Capability** PCI-1735U: Sink: 0.5 V @ 24 mA
Source: 2.0 V @ 15 mA
PCI-1737U/1739U: Sink: 0.4 V @ 24 mA
Source: 2.4 V @ 15 mA

Counter/Timer (PCI-1735U)

- **Channels** 3
- **Resolution** 16 bits
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 1 MHz
- **Re. Clock Internal** Selectable 1 MHz, 100 kHz, or 10 kHz base clock
- **Ext. Clock Frequency** Jumper selectable divider: x2, x1, x0.5, and x0.25
- **Prog. Counter Modes** 6

General

- **Bus Type** Universal PCI V2.2
- **I/O Connectors** PCI-1735U: 5 x 20-pin box header
PCI-1737U: 2 x 20-pin & 1 x 50-pin box header
PCI-1739U: 2 x 50-pin box header
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** PCI-1735U: 5 V @ 98.8 mA (max.)
PCI-1737U: 5 V @ 294.9 mA (max.)
PCI-1739U: 5 V @ 540.8 mA (max.)
- **Operating Temperature** 0 ~ 65°C (32 ~ 149°F)
- **Storage Temperature** -25 ~ 80°C (-13 ~ 176°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

Ordering Information

- **PCI-1735U** 64-ch Digital I/O and Counter Card
- **PCI-1737U** 24-ch Digital I/O Universal PCI Card
- **PCI-1739U** 48-ch Digital I/O Universal PCI Card

Accessories

- **PCL-10120-1E** IDC-20 Flat Cable, 1 m
- **PCL-10120-2E** IDC-20 Flat Cable, 2 m
- **PCL-10150-1.2E** 50-pin Flat Cable, 1.2 m
- **ADAM-3920** 20-Pin Flat Cable Terminal, DIN-rail Mount
- **ADAM-3950** 50-pin DIN-rail Flat Cable Wiring Board

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[CYG2218](#) [FAB118](#) [8500-003](#) [IFD8520](#) [FAB100-RC](#) [20-101-1338](#) [cPCI-3544](#) [CYG2217](#) [CYG2320](#) [422CON](#) [ATX6022/14GP7](#)
[ATX6022/8](#) [AX93221-24/48](#) [cPCI-3538](#) [USB30-MIPI-TESTER-OV10640](#) [MTAC-LORA-H-915](#) [OPT8AP-AE](#) [60006-016](#) [96RMKVM-](#)
[19V1C-A](#) [60016-011](#) [60016-014](#) [60006-008](#) [60016-015](#) [60011-075](#) [LPC1e-3488A](#) [HPCI-14S12U](#) [cBP-3208](#) [cBP-3062A](#) [FAB205-6P5](#)
[FAB114](#) [ATX6022/6](#) [60016-012](#) [96RMKVM-17V1C-A](#) [BB-QCLDVDSV2-KIT](#) [MOS-1120Y-0201E](#) [96RMLCD-17V1-A](#) [96RMKVM-](#)
[17V8C-A](#) [60004-005](#) [60016-017](#) [60006-019](#) [60006-009](#) [60004-002C](#) [PCIE-1622B-BE](#) [60016-035](#) [60016-034](#) [60016-031](#) [60016-030](#) [60016-](#)
[026](#) [60016-025](#) [60016-024](#)