



## PROFIBUS Field Attachable Connectors


### 0976 PMC 101



#### M12 Male

Field attachable connector, M12 male connector with threaded joint, shieldable, assembling with screw terminals 0976 PMC 101: 5 poles, B coding.

– especially suitable for Profibus signal cable 0975 254 000/... M –

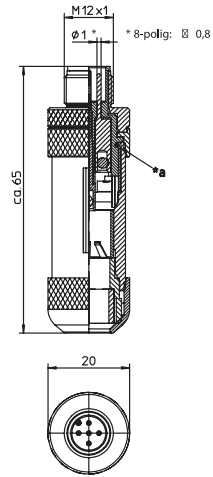

\*a O-Ring


### 0976 PMC 102



#### M12 Male

Field attachable connector, M12 male connector with threaded joint, shieldable, assembling with spring-type terminals 0976 PMC 102: 4 poles, B coding.

– especially suitable for Profibus signal cable 0975 254 000/...M Profibus signals –

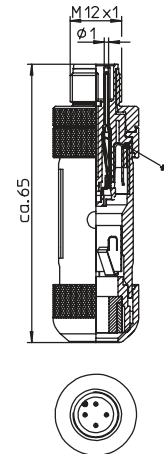

\*a O-Ring

### Pin Assignment

#### M12 - 4 Poles (B-Code)



#### M12 - 5 Poles (B-Code)





Be Certain with Belden

**PROFIBUS Field Attachable Connectors**

0976 PMC 101 | 0976 PMC 102

**Technical Data**

**Environmental**

Degree of protection IP 67 / NEMA 6P  
 Operating temperature range -25°C (-13°F) / +90°C (+194°F)

**Mechanical**

Housing / Molded body GD-ZnAl, pre-coppered and nickel-plated  
 Insert PBT  
 Contact 0976 PFC 101: CuZn, pre-coppered, CuSnZn  
 0976 PFC 102: Stainless steel, silver-plated, gold plated  
 Receptacle shell CuZn, nickel-plated  
 Shield sleeve CuBe, tin-plated  
 O-ring FKM  
 Mode of connection 0976 PFC 101: screw terminals  
 0976 PFC 102: spring-type terminals  
 Connectable conductor 0976 PFC 101: max. 0.75 mm<sup>2</sup>  
 0976 PFC 102: 0.14-0.50 mm<sup>2</sup>, 0.14 mm<sup>2</sup> with terminal pin sleeve

**Electrical**

Contact resistance ≤ 5 mΩ  
 Nominal current at 40°C 4 A  
 Nominal voltage 4 poles 120 V  
 5 poles 60 V  
 0976 PMC 102: 32 V  
 Rated voltage 4 poles 125 V  
 5 poles 63 V  
 Test voltage 4 poles 1.5 kV eff. / 60 s  
 5 poles 1.0 kV eff. / 60 s  
 0976 PMC 102: 0.65 kV eff. / 60 s  
 Insulation resistance > 10<sup>9</sup> Ω  
 Pollution degree 3

Part Number	Pins	Screw Joint for Cable	
0976 PMC 101	5B	Ø 4.0-9.0 mm	
0976 PMC 102	4B	Ø 4.0-9.0 mm	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Circular Connector](#) category:*

*Click to view products by [Lumberg](#) manufacturer:*

Other Similar products are found below :

[C015 10F006 001 1](#) [5M2530B10P](#) [600247N007](#) [600259N006](#) [600273N007](#) [600432N009](#) [6280-2PG-519](#) [6280-3PG-311](#) [6280-3SG-311](#)  
[6280-7SG-3DC](#) [6280-7SG-522](#) [6282-5PG-311](#) [6282-6PG-519](#) [6282-8SG-311](#) [6283-11](#) [6283-15](#) [6290](#) [6293](#) [6382-2PG-311](#) [6382-2SG-321](#)  
[6382-2SG-3DC](#) [6382-4SG-516](#) [67-03E20-37P](#) [681-PMG](#) [CXC3106A1811S](#) [CXS3102A14S2P](#) [CXS3102A181S](#) [CXS3106A14S6S](#)  
[D38999/20FC8SA L/C](#) [MB12P-1](#) [MB12R-6](#) [7251-2PG-300](#) [7251-2SG-300](#) [7251-4PG-300](#) [7251-4SG-300](#) [7251-5PG-300](#) [7251-5SG-300](#)  
[7251-6SG-300](#) [7251-7PG-300](#) [7251-8PG-300](#) [7271-6SG-300](#) [7282-3PG-300-CH3](#) [73000005663](#) [75-190011-03P](#) [75-190216-08S](#) [75-190218-](#)  
[10P](#) [75-214636-52P](#) [75-474118-10P](#) [75-474211-03P](#) [75-474218-19S](#)