


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

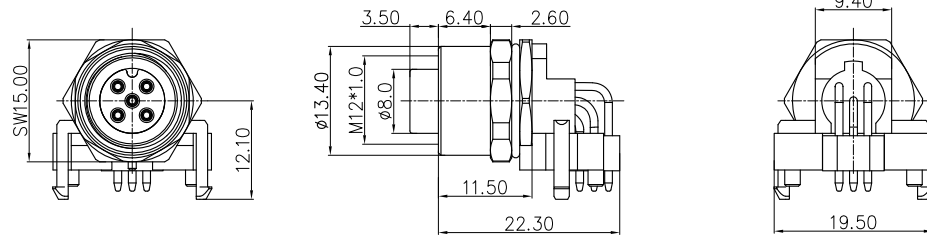

Detailed product Description:

1. Waterproof connector rating is IP65/IP67
2. Protected from dust and water during immersion, resistant to many oils and chemical etc

Electrical character:


1. Rating voltage: 250V AC/DC
2. Insulation resistance: >100MΩ
3. Rating current: 4A
4. Contact resistance of the connector ≤ 10 mΩ

Other Specification:

1. Contact PIN: Phosphor Copper with Gold plating
2. Coupling nut/screw: Brass with nickel plating
3. Insulation plastic: PA66+GF
4. Degree of protection: IP65/67
5. Operating temperature: -25℃ ~ +85℃

Electrical character

Panel mounted



Prat Number	Contacts	Rated Voltage		Rated Current	Contact Resistance
		A/C	D/C		
SR-M12A-03P-FF-SF7003-00B(H)		250V	250V	4A	10mΩ
SR-M12A-04P-FF-SF7003-00B(H)		250V	250V	4A	10mΩ
SR-M12A-05P-FF-SF7003-00B(H)		60V	60V	4A	10mΩ
SR-M12A-08P-FF-SF7003-00B(H)		30V	30V	2A	10mΩ
SR-M12A-12P-FF-SF7003-00B(H)		30V	30V	1.5A	10mΩ
SR-M12B-05P-FF-SF7003-00B(H)		60V	60V	4A	10mΩ
SR-M12D-04P-FF-SF7003-00B(H)		250V	250V	4A	10mΩ

DETACHED LISTS	PART NO.: /		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD: Alam 9/10/15"		NAME: SR-M12X-XXP-FF-SF7003-00B(H)			
	CHKD: Aaron 9/2/15"		TITLE: CUSTOMER DRAWING		REV	DO
	DRFT: CKZ 08/11/15"		DRAWING NO.:		SHEET	1/1
 THIRD ANGLE PROJECTION		 MM (INCH) DO NOT SCALE DRAWING		SCALE	1:1	