


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

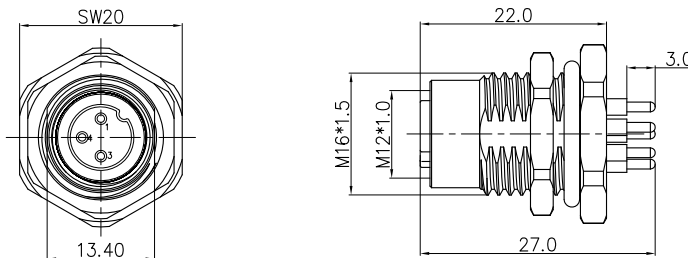

Detailed product Description:

1. Waterproof connector rating is IP65/IP67
2. Protected from dust and water during immersion, resistant to many oils and chemical etc

Electrical character:

1. Rating voltage: 250V AC/DC
2. Insulation resistance: >100MΩ
3. Rating current: 4A
4. Contact resistance of the connector ≤ 10 mΩ


Other Specification:

1. Contact PIN: Phosphor Copper with Gold plating
2. Coupling nut/screw: Brass with nickel plating
3. Insulation plastic: PA66+GF
4. Degree of protection: IP65/67
5. Operating temperature: -25℃ ~ +85℃

Electrical character

Prat Number	Contacts	Rated Voltage		Rated Current	Contact Resistance
		A/C	D/C		
SP-M12A-03P-FF-SF7002-00B(H)		250V	250V	4A	10mΩ
SP-M12A-04P-FF-SF7002-00B(H)		250V	250V	4A	10mΩ
SP-M12A-05P-FF-SF7002-00B(H)		60V	60V	4A	10mΩ
SP-M12A-08P-FF-SF7002-00B(H)		30V	30V	2A	10mΩ
SP-M12A-12P-FF-SF7002-00B(H)		30V	30V	1.5A	10mΩ
SP-M12B-05P-FF-SF7002-00B(H)		60V	60V	4A	10mΩ
SP-M12D-04P-FF-SF7002-00B(H)		250V	250V	4A	10mΩ

Panel mounted



DETACHED LISTS	PART NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: Alam 9/10/15"	NAME: SP-M12X-XXP-FF-SF7002-00B(H)		
	CHKD: Aaron 9/2/15"	TITLE: CUSTOMER DRAWING		
	DRFT: CKZ 08/11/15"	REV	DO	
THIRD ANGLE PROJECTION		DRAWING NO.:	SHEET	1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1