

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

Detailed product Description:


1. Waterproof connector rating is IP67/IP68
2. Protected from dust and water during immersion, resistant to many oils and chemical etc

Electrical character:

1. Rating voltage: 60V AC/DC
2. Insulation resistance: >100MΩ
3. Rating current: 4A
4. Contact resistance of the connector ≤10 mΩ


Other Specification:

1. Contact PIN: Phosphor Copper with Gold plating
2. Coupling nut/screw: Brass with nickel plating
3. Insulation plastic: PA66+GF
4. Degree of protection: IP67/68
5. Operating temperature: -25℃~+85℃

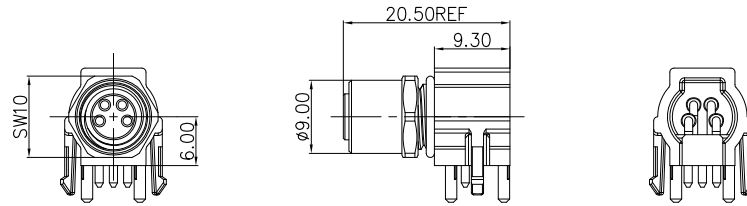

Electrical character

Prat Number	Contacts	Rated Voltage		Rated Current	Contact Resistance
		A/C	D/C		
SR-M8A-03P-FF-SF7001-00B(H)		60V	60V	3A	10mΩ
SR-M8A-04P-FF-SF7001-00B(H)		30V	30V	3A	10mΩ
SR-M8B-05P-FF-SF7001-00B(H)		30V	30V	3A	10mΩ
SR-M8A-06P-FF-SF7001-00B(H)		30V	30V	2A	10mΩ
SR-M8A-08P-FF-SF7001-00B(H)		30V	30V	1.5A	10mΩ

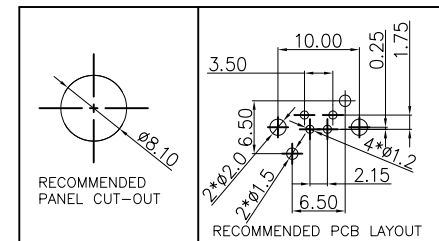

DETACHED LISTS	PART NO.: /		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD: WYH 08/05/17"	NAME: SR-M8X-XXP-FF-SF7001-00B(H)		
	CHKD: BY 08/05/17"	TITLE: CUSTOMER DRAWING		
	DRFT: LD 08/05/17"	REV	DO	
		DRAWING NO.:	SHEET	1/1
	MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1	